Philips Semiconductors

Product Specification

TOPFET high side switch SMD version of BUK219-50Y

BUK220-50Y

DESCRIPTION

Monolithic single channel high side protected power switch in **TOPFET2** technology assembled in a 5 pin plastic surface mount package.

APPLICATIONS

General controller for driving lamps, motors, solenoids, heaters.


FEATURES

- Vertical power TrenchMOS
- Low on-state resistance
- CMOS logic compatible
- Very low quiescent current
- Overtemperature protection
- Load current limiting
- Latched overload and short circuit protection
- Overvoltage and undervoltage shutdown with hysteresis
- On-state open circuit load detection
- Diagnostic status indication
- Voltage clamping for turn off of inductive loads
- · ESD protection on all pins
- Reverse battery, overvoltage and transient protection

QUICK REFERENCE DATA

SYMBOL	PARAMETER	MIN.	UNIT			
ILLM	Nominal load current (ISO)	2	A			
SYMBOL	PARAMETER	MAX.	UNIT			
V _{BG} I _L T _j R _{ON}	Continuous off-state supply voltage Continuous load current Continuous junction temperature On-state resistance $T_j = 25^{\circ}C$	50 6 150 180	V A °C mΩ			


FUNCTIONAL BLOCK DIAGRAM

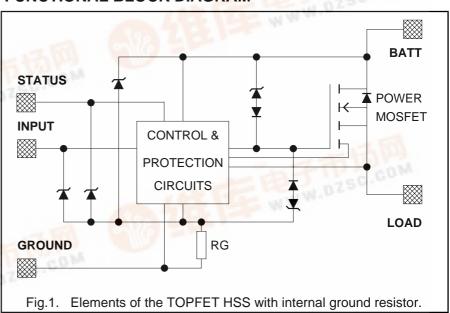


PINNING - SOT426

PIN	DESCRIPTION
1	Ground
2	Input
3	(connected to mb)
4	Status AND
5	Load
mb	Battery

PIN CONFIGURATION



SYMBOL





BUK220-50Y

LIMITING VALUES

Limiting values in accordance with the Absolute Maximum System (IEC 134)

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{BG}	Continuous supply voltage		0	50	V
I _L	Continuous load current	T _{mb} ≤114°C	-	6	А
P _D	Total power dissipation	T _{mb} ≤25°C	-	41	W
T _{stg}	Storage temperature		-55	175	°C
T _j	Continuous junction temperature ¹		-	150	°C
T_{sold}	Mounting base temperature	during soldering	-	260	°C
	Reverse battery voltages ²				
-V _{BG}	Continuous reverse voltage		-	16	V
-V _{BG}	Peak reverse voltage		-	32	V
	Application information				
R _I , R _S	External resistors ³	to limit input, status currents	3.2	-	kΩ
	Input and status				
I _I , I _S	Continuous currents		-5	5	mA
I _I , I _S	Repetitive peak currents	$\delta \le 0.1$, tp = 300 μs	-50	50	mA
	Inductive load clamping	I _L = 1 A, V _{BG} = 16 V			
E _{BL}	Non-repetitive clamping energy	$T_j = 150$ °C prior to turn-off	-	75	mJ

ESD LIMITING VALUE

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _C	Electrostatic discharge capacitor voltage	Human body model; C = 250 pF; R = 1.5 kΩ	ı	2	kV

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
	Thermal resistance⁴					
R _{th j-mb}	Junction to mounting base	-	-	2.5	3	K/W

¹ For normal continuous operation. A higher T_j is allowed as an overload condition but at the threshold $T_{j(TO)}$ the over temperature trip operates to protect the switch.

² Reverse battery voltage is allowed only with external resistors to limit the input and status currents to a safe value. The connected load must limit the reverse load current. The internal ground resistor limits the reverse battery ground current. Power is dissipated and the T_j rating must be observed.

³ To limit currents during reverse battery and transient overvoltages (positive or negative).

⁴ Of the output power MOS transistor.

BUK220-50Y

STATIC CHARACTERISTICS

Limits are at -40°C \leq T_{mb} \leq 150°C and typicals at T_{mb} = 25 °C unless otherwise stated.

SYMBOL	PARAMETER	CONDITIO	NS			MIN.	TYP.	MAX.	UNIT
	Clamping voltages								
V_{BG}	Battery to ground	$I_G = 1 \text{ mA}$				50	55	65	V
V_{BL}	Battery to load	$I_L = I_G = 1 \text{ m}$	nΑ			50	55	65	V
$-V_{LG}$	Negative load to ground	$I_L = 10 \text{ mA}$				18	23	28	V
-V _{LG}	Negative load voltage ¹	$I_{L} = 1 \text{ A}; t_{p} =$	= 300 μs	;		20	25	30	V
	Supply voltage	battery to	battery to ground						
V_{BG}	Operating range ²	-				5.5	-	35	V
	Currents	9 V ≤ V _{BG} ≤	16 V						
I_B	Quiescent current ³	$V_{LG} = 0 V$				-	-	20	μΑ
				T _{mb} =	= 25°C	-	0.1	2	μΑ
I_{L}	Off-state load current ⁴	$V_{BL} = V_{BG}$				-	-	20	μΑ
				$T_{mb} =$	= 25°C	-	0.1	1	μΑ
I_{G}	Operating current ⁵	$I_L = 0 A$				-	2	4	mΑ
IL	Nominal load current ⁶	$V_{BL} = 0.5 \text{ V}$				2	-	-	Α
	Resistances	V_{BG}	ال	t _p	T _{mb}				
R_{ON}	On-state resistance ⁷	9 to 35 V	1 A	300 μs	25°C	-	135	180	mΩ
					150°C	-	-	330	mΩ
R_{ON}	On-state resistance	6 V	1 A	300 μs	25°C	-	170	225	mΩ
					150°C	-	-	410	mΩ
R_{G}	Internal ground resistance	I _G = 10 mA				95	150	190	Ω

¹ For a high side switch, the load pin voltage goes negative with respect to ground during the turn-off of an inductive load.

² On-state resistance is increased if the supply voltage is less than 9 V.

³ This is the continuous current drawn from the supply when the input is low and includes leakage current to the load.

⁴ The measured current is in the load pin only.

⁵ This is the continuous current drawn from the supply with no load connected, but with the input high.

⁶ Defined as in ISO 10483-1. For comparison purposes only. This parameter will not be characterised for automotive PPAP.

 $[\]textbf{7} \text{ The supply and input voltage for the } R_{ON} \text{ tests are continuous. } \text{ The specified pulse duration } t_p \text{ refers only to the applied load current.}$

Philips Semiconductors Product Specification

TOPFET high side switch SMD version of BUK219-50Y

BUK220-50Y

INPUT CHARACTERISTICS

9 V \leq V_{BG} \leq 16 V. Limits are at -40°C \leq T_{mb} \leq 150°C and typicals at T_{mb} = 25 °C unless otherwise stated.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I ₁	Input current	$V_{IG} = 5 \text{ V}$	20	90	160	μΑ
V _{IG}	Input clamping voltage	Ι _ι = 200 μΑ	5.5	7	8.5	V
$V_{IG(ON)}$	Input turn-on threshold voltage		-	2.4	3	V
$V_{IG(OFF)}$	Input turn-off threshold voltage		1.5	2.1	-	V
ΔV_{IG}	Input turn-on hysteresis		-	0.3	-	V
I _{I(ON)}	Input turn-on current	$V_{IG} = 3 V$	-	-	100	μΑ
I _{I(OFF)}	Input turn-off current	V _{IG} = 1.5 V	10	-	-	μΑ

STATUS CHARACTERISTICS

The status output is an open drain transistor, and requires an external pull-up circuit to indicate a logic high. Limits are at -40 $^{\circ}$ C \leq T_{mb} \leq 150 $^{\circ}$ C and typicals at T_{mb} = 25 $^{\circ}$ C unless otherwise stated. Refer to TRUTH TABLE.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_{SG}	Status clamping voltage	I _S = 100 μA	5.5	7	8.5	V
V_{SG}	Status low voltage	$I_S = 100 \mu A$ $I_S = 100 \mu A$	-	-	1	V
		$T_{mb} = 25^{\circ}C$	-	0.7	0.8	V
I _s	Status leakage current	$V_{SG} = 5 V$	-	-	15	μΑ
		$T_{mb} = 25^{\circ}C$	-	0.1	1	μΑ
Is	Status saturation current ¹	$V_{SG} = 5 V$	2	7	12	mA
	Application information					
R _s	External pull-up resistor		-	47	-	kΩ

OPEN CIRCUIT DETECTION CHARACTERISTICS

An open circuit load can be detected in the on-state. Refer to TRUTH TABLE. Limits are at -40 $^{\circ}C \leq T_{mb} \leq 150 ^{\circ}C$ and typical is at $T_{mb} = 25 ^{\circ}C$.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
	Open circuit detection	$9 \text{ V} \leq \text{V}_{BG} \leq 35 \text{ V}$				
I _{L(TO)}	Low current detect threshold		50	-	340	mA
		$T_j = 25^{\circ}C$	85	170	255	mA
$\Delta I_{L(TO)}$	Hysteresis		-	30	-	mA

¹ In a fault condition with the pull-up resistor short circuited while the status transistor is conducting. This condition should be avoided in order to prevent possible interference with normal operation of the device.

BUK220-50Y

UNDERVOLTAGE & OVERVOLTAGE CHARACTERISTICS

Limits are at -40°C \leq T_{mb} \leq 150°C and typicals at T_{mb} = 25 °C. Refer to TRUTH TABLE.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
	Undervoltage					
$V_{BG(UV)}$	Low supply threshold voltage ¹		2	4.2	5.5	V
$\Delta V_{BG(UV)}$	Hysteresis		-	0.5	-	V
	Overvoltage					
$V_{BG(OV)}$ $\Delta V_{BG(OV)}$	High supply threshold voltage ² Hysteresis		40 -	45 1	50 -	V V

TRUTH TABLE

	AE	BNORMA DE	AL CON		S	LOAD				
INPUT	SUP	SUPPLY		LOAD		LOAD		OUTPUT	STATUS	DESCRIPTION
	UV	ov	LC	SC	ОТ					
L	Х	Х	Х	Х	Х	OFF	Н	off		
Н	0	0	0	0	0	ON	Н	on & normal		
Н	0	0	1	0	0	ON	L	on & low current detect		
Н	1	0	Х	Х	Х	OFF	Н	supply undervoltage lockout		
Н	0	1	Х	0	0	OFF	Н	supply overvoltage shutdown		
Н	0	0	0	1	Х	OFF	L	SC tripped		
Н	0	0	0	0	1	OFF	L	OT shutdown ³		

KEY TO ABBREVIATIONS

logic low logic high

don't care

condition not present condition present

UV undervoltage
OV overvoltage
LC low current or open circuit load
SC short circuit
OT overtemperature

¹ Undervoltage sensor causes the device to switch off and reset.

² Overvoltage sensor causes the device to switch off to protect its load.

³ The status will continue to indicate OT (even if the input goes low) until the device cools below the reset threshold. Refer to OVERLOAD PROTECTION CHARACTERISTICS.

BUK220-50Y

OVERLOAD PROTECTION CHARACTERISTICS

 $5.5~V \le V_{BG} \le 35~V$, limits are at -40°C $\le T_{mb} \le 150$ °C and typicals at $T_{mb} = 25~$ °C unless otherwise stated. Refer to TRUTH TABLE.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$\mathbf{I}_{L(lim)}$	Overload protection Load current limiting	$V_{BL} = V_{BG}$ $V_{BG} \ge 9 \text{ V}$	6	9	12	А
$V_{BL(TO)}$	Short circuit load protection Battery load threshold voltage ¹	$V_{BG} = 16$ $V_{BG} = 35$	V 8 V 15	10 20	12 25	V
t _{d sc}	Response time ²	$V_{BL} > V_{BL(TO)}$	-	180	250	μs
$T_{j(TO)}$	Overtemperature protection Threshold junction temperature ³		150	170	190	°C
$\Delta T_{j(TO)}$	Hysteresis		-	10	-	°C

SWITCHING CHARACTERISTICS

 T_{mb} = 25 °C, 9 V \leq V_{BG} \leq 16 V, for resistive load R_L = 13 Ω .

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
	During turn-on	to $V_{IG} = 5 V$				
t _{d on}	Delay time	to 10% V _L	-	28	40	μs
dV/dt _{on}	Rate of rise of load voltage	30% to 70% V _L	-	0.75	1	V/μs
t on	Total switching time	to 90% V _L	-	60	90	μs
	During turn-off	to V _{IG} = 0 V				
t _{d off}	Delay time	to 90% V _L	-	36	54	μs
dV/dt _{off}	Rate of fall of load voltage	70% to 30% V _L	-	0.75	1	V/μs
t off	Total switching time	to 10% V _L	-	60	90	μs

CAPACITANCES

 T_{mb} = 25 °C; f = 1 MHz; V_{IG} = 0 V. designed in parameters.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
C _{ig}	Input capacitance	V _{BG} = 13 V	-	15	20	pF
C _{bl}	Output capacitance	V _{BL} = 13 V	-	100	140	рF
C_{sg}	Status capacitance	$V_{SG} = 5 V$	-	11	15	pF


¹ The battery to load threshold voltage for short circuit protection is proportional to the battery supply voltage. A graph showing $V_{\text{BL}(TO)}$ versus V_{BG} will be provided in the product specification. After short circuit protection has operated, the input voltage must be toggled low for the switch to resume normal operation.

² Measured from when the input goes high.

³ After cooling below the reset temperature the switch will resume normal operation.

BUK220-50Y

MECHANICAL DATA

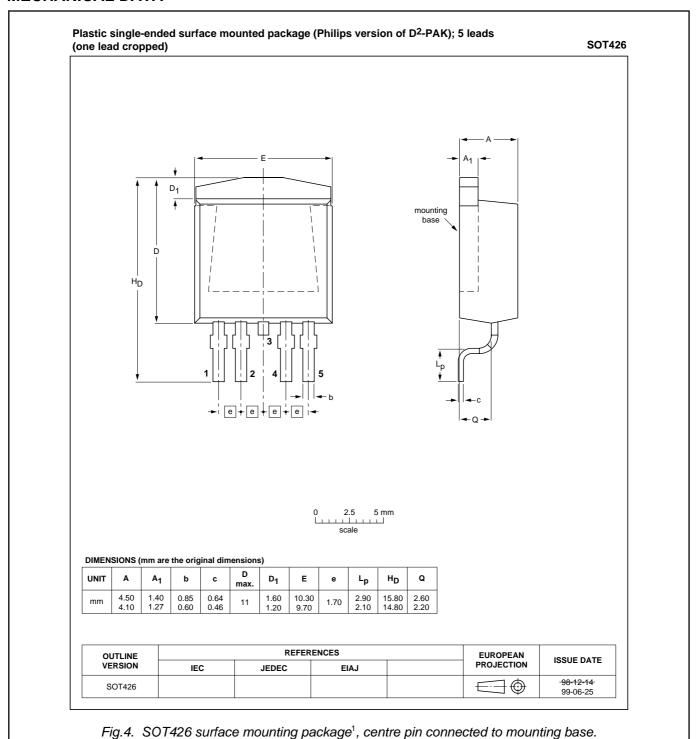

¹ Epoxy meets UL94 V0 at 1/8". Net mass: 1.5 g. For soldering guidelines and SMD footprint design, please refer to Data Handbook SC18.

BUK220-50Y

DEFINITIONS

DATA SHEET STATUS				
DATA SHEET STATUS ¹	PRODUCT STATUS ²	DEFINITIONS		
Objective data	Development	This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice		
Preliminary data	Qualification	This data sheet contains data from the preliminary specification. Supplementary data will be published at a later date. Philips Semiconductors reserves the right to change the specification without notice, in ordere to improve the design and supply the best possible product		
Product data	Production	This data sheet contains data from the product specification. Philip Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Changes v be communicated according to the Customer Product/Process Change Notification (CPCN) procedure SNW-SQ-650A		
Limiting values				

Limiting values

Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information

Where application information is given, it is advisory and does not form part of the specification.

© Philips Electronics N.V. 2001

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.

¹ Please consult the most recently issued datasheet before initiating or completing a design.

² The product status of the device(s) described in this datasheet may have changed since this datasheet was published. The latest information is available on the Internet at URL http://www.semiconductors.philips.com.