

SKT 10



Stud Thyristor

Line Thyristor

SKT 10

Features


- Hermetic metal case with glass insulator
- Threaded stud ISO M5
- International standard case

Typical Applications







- DC motor control
(e. g. for machine tools)
- Controlled rectifiers
(e. g. for battery charging)
- AC controllers
(e. g. for temperature control)
- Recommended snubber network
e.g. for $V_{VRMS} \leq 400 \text{ V}$:
 $R = 100 \Omega / 5 \text{ W}$, $C = 0,1 \mu\text{F}$

V_{RSM} V	V_{RRM} , V_{DRM} V	$I_{TRMS} = 30 \text{ A}$ (maximum value for continuous operation) $I_{TAV} = 10 \text{ A}$ (sin. 180; $T_c = 111 \text{ }^\circ\text{C}$)		
700	600	SKT 10/06D		
900	800	SKT 10/08D		
1300	1200	SKT 10/12E		




Symbol	Conditions	Values	Units
I_{TAV}	sin. 180; $T_c = 100 \text{ (85) } ^\circ\text{C}$	14 (19)	A
I_D	K9; $T_a = 45 \text{ }^\circ\text{C}$; B2 / B6	12 / 16,5	A
	K5; $T_a = 45 \text{ }^\circ\text{C}$; B2 / B6	17 / 24	A
I_{RMS}	K9; $T_a = 45 \text{ }^\circ\text{C}$; W1C	13	A
I_{TSM}	$T_{vj} = 25 \text{ }^\circ\text{C}$; 10 ms	250	A
	$T_{vj} = 130 \text{ }^\circ\text{C}$; 10 ms	210	A
i^2t	$T_{vj} = 25 \text{ }^\circ\text{C}$; 8,35 ... 10 ms	310	A ² s
	$T_{vj} = 130 \text{ }^\circ\text{C}$; 8,35 ... 10 ms	220	A ² s
V_T	$T_{vj} = 25 \text{ }^\circ\text{C}$; $I_T = 30 \text{ A}$	max. 1,6	V
$V_{T(TO)}$	$T_{vj} = 130 \text{ }^\circ\text{C}$	max. 1	V
r_T	$T_{vj} = 130 \text{ }^\circ\text{C}$	max. 18	m Ω
I_{DD} , I_{RD}	$T_{vj} = 130 \text{ }^\circ\text{C}$; $V_{RD} = V_{RRM}$; $V_{DD} = V_{DRM}$	max. 4	mA
t_{gd}	$T_{vj} = 25 \text{ }^\circ\text{C}$; $I_G = 1 \text{ A}$; $di_G/dt = 1 \text{ A}/\mu\text{s}$	1	μs
t_{gr}	$V_D = 0,67 \cdot V_{DRM}$	2	μs
$(di/dt)_{cr}$	$T_{vj} = 125 \text{ }^\circ\text{C}$	max. 50	A/ μs
$(dv/dt)_{cr}$	$T_{vj} = 125 \text{ }^\circ\text{C}$; SKT ...D / SKT ...E	max. 500 / 1000	V/ μs
t_q	$T_{vj} = 130 \text{ }^\circ\text{C}$	80	μs
I_H	$T_{vj} = 25 \text{ }^\circ\text{C}$; typ. / max.	80 / 150	mA
I_L	$T_{vj} = 25 \text{ }^\circ\text{C}$; typ. / max.	150 / 300	mA
V_{GT}	$T_{vj} = 25 \text{ }^\circ\text{C}$; d.c.	min. 3	V
I_{GT}	$T_{vj} = 25 \text{ }^\circ\text{C}$; d.c.	min. 100	mA
V_{GD}	$T_{vj} = 130 \text{ }^\circ\text{C}$; d.c.	max. 0,25	V
I_{GD}	$T_{vj} = 130 \text{ }^\circ\text{C}$; d.c.	max. 3	mA
$R_{th(j-c)}$	cont.	1,2	K/W
$R_{th(j-c)}$	sin. 180	1,3	K/W
$R_{th(j-c)}$	rec. 120	1,35	K/W
$R_{th(c-s)}$		1	K/W
T_{vj}		- 40 ... + 130	$^\circ\text{C}$
T_{stg}		- 40 ... + 150	$^\circ\text{C}$
V_{isol}		-	V~
M_s	to heatsink	2,0	Nm
a		5 * 9,81	m/s ²
m	approx.	7	g
Case		B 1	

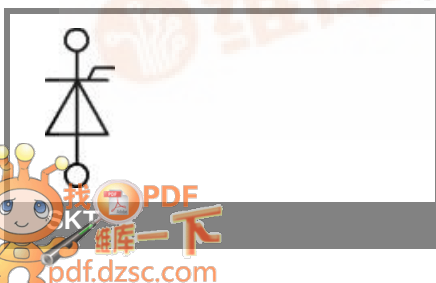

SKT 10

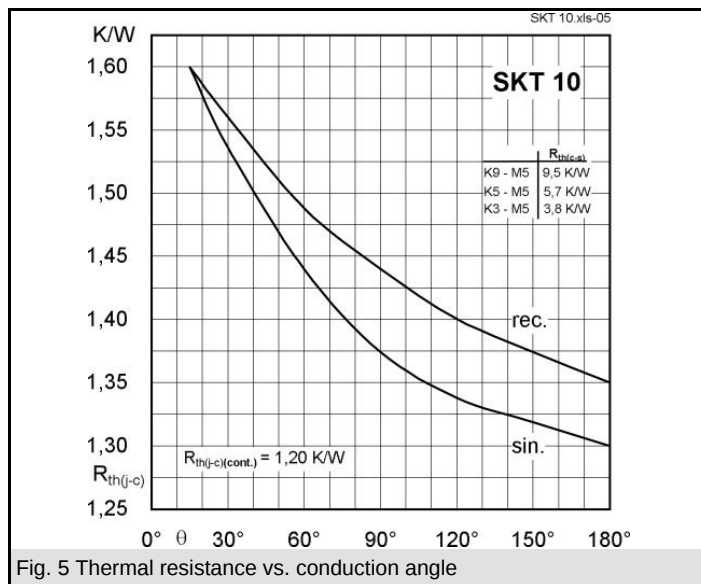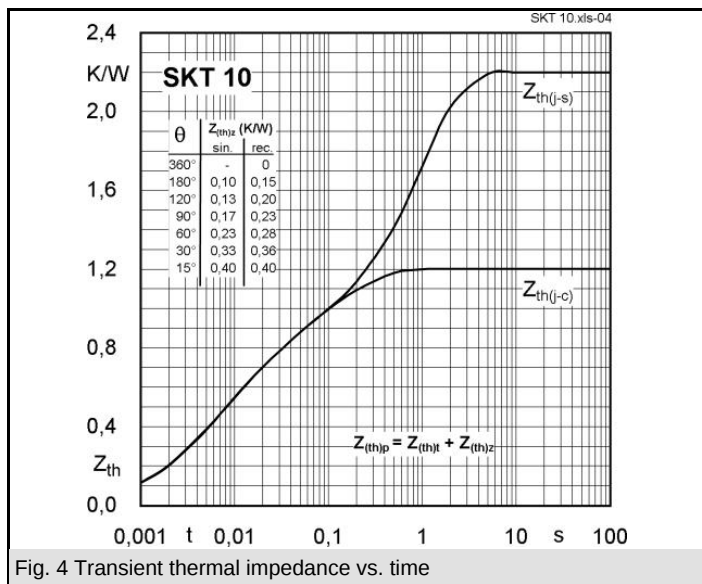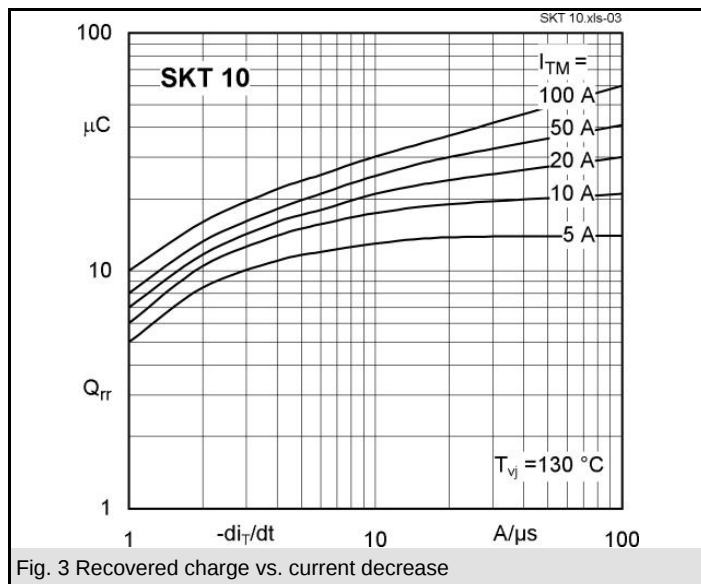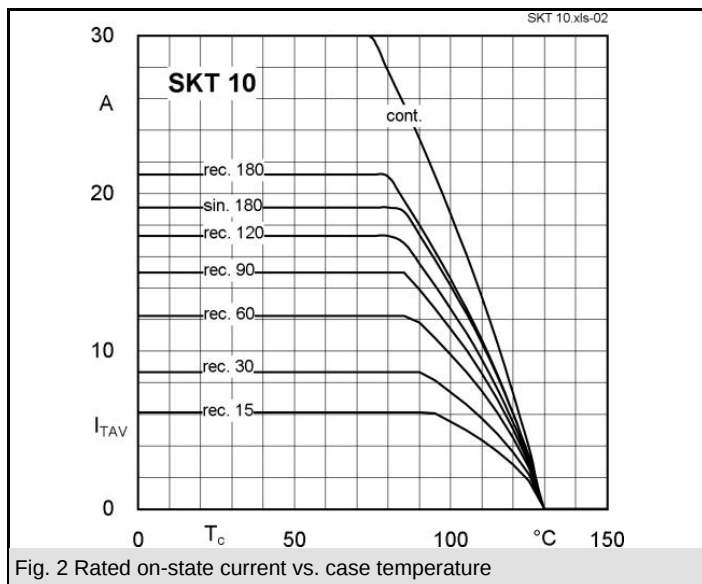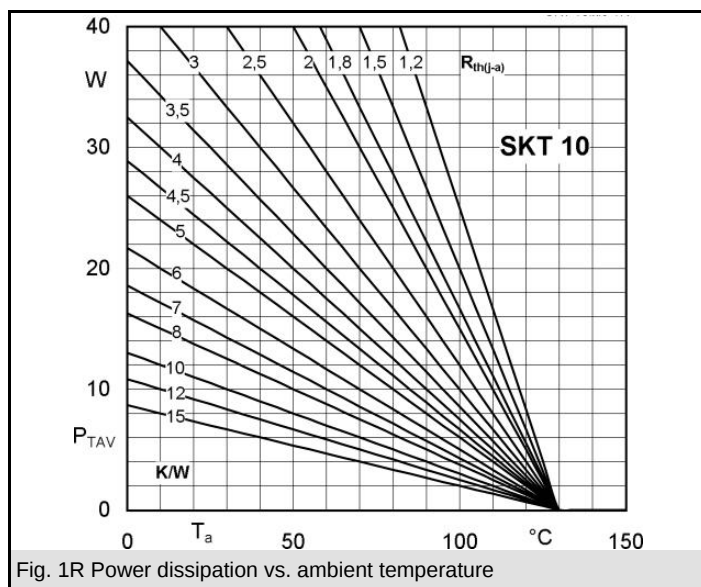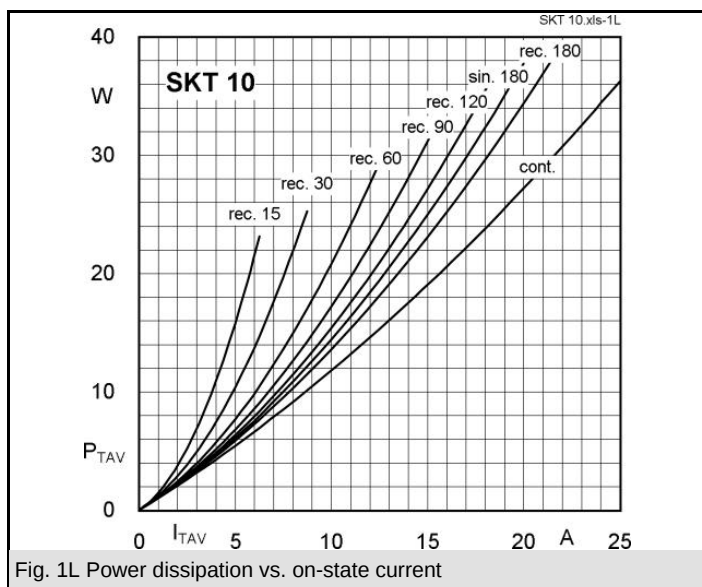

SKT 10

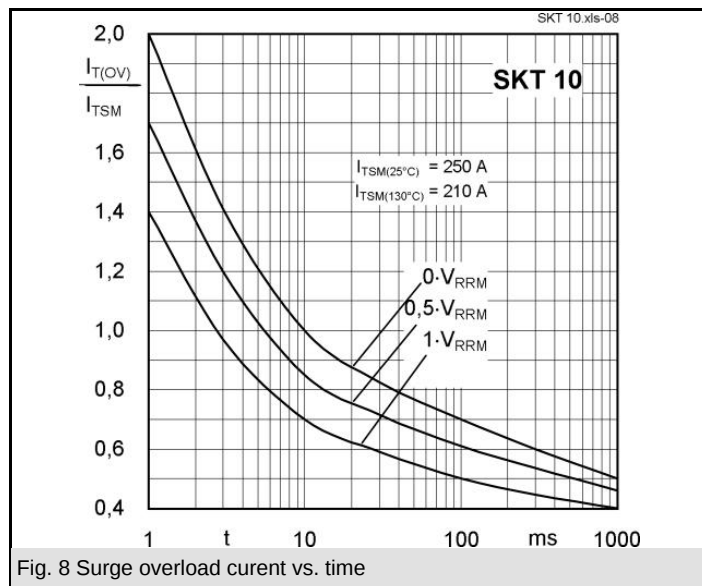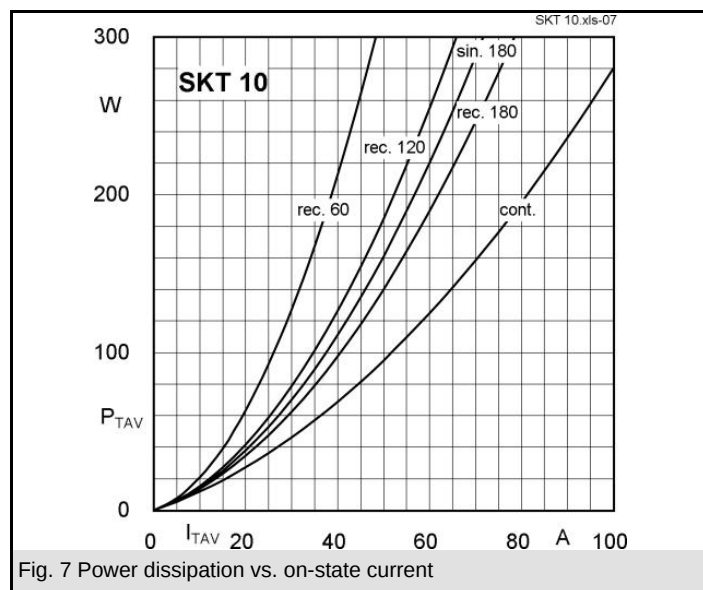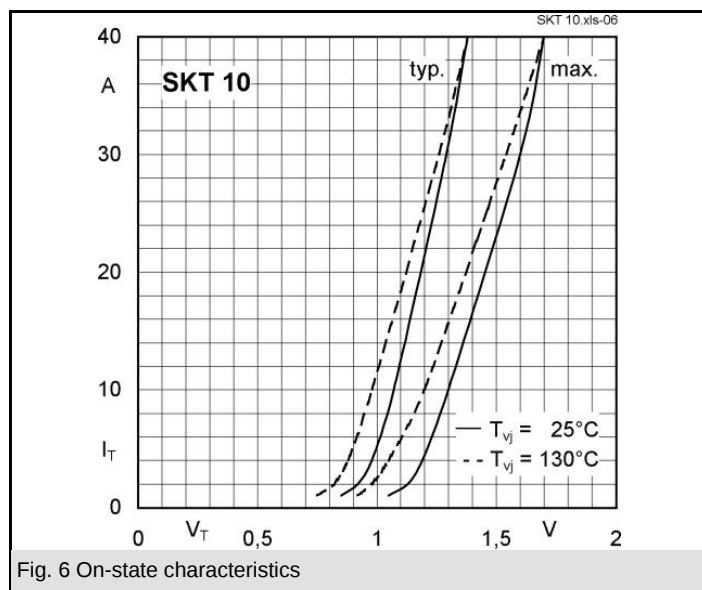

SKT 10

