


SKiIP 03AC126V1

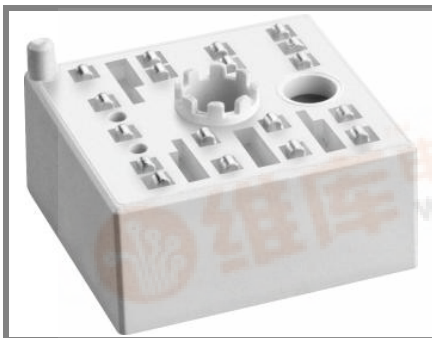

MiniSKiIP®0

3-phase bridge inverter

SKiIP 03 AC 126 V1

Target Data

Features


- Fast Trench IGBTs
- Robust and soft freewheeling diodes in CAL technology
- Highly reliable spring contacts for electrical connections
- UL recognised file no. E63532

Remarks



- V_{CEsat} , V_F = chip level value

Absolute Maximum Ratings		$T_S = 25\text{ }^\circ\text{C}$, unless otherwise specified	
Symbol	Conditions	Values	Units
IGBT - Inverter			
V_{CES}		1200	V
I_C	$T_S = 25\text{ (70) }^\circ\text{C}$	19 (15)	A
I_{CRM}	$T_S = 25\text{ (70) }^\circ\text{C}$, $t_p \leq 1\text{ ms}$	38 (30)	A
V_{GES}		± 20	V
T_j		-40...+150	$^\circ\text{C}$
Diode - Inverter			
I_F	$T_S = 25\text{ (70) }^\circ\text{C}$	14 (11)	A
I_{FRM}	$T_S = 25\text{ (70) }^\circ\text{C}$, $t_p \leq 1\text{ ms}$	28 (22)	A
T_j		-40...+150	$^\circ\text{C}$
I_{RMS}	per power terminal (20 A / spring)	20	A
T_{stg}	$T_{op} \leq T_{stg}$	-40...+125	$^\circ\text{C}$
V_{isol}	AC, 1 min.	2500	V

Characteristics		$T_S = 25\text{ }^\circ\text{C}$, unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
IGBT - Inverter					
V_{CEsat}	$I_C = 8\text{ A}$, $T_j = 25\text{ (125) }^\circ\text{C}$		1,7 (2)	2,1 (2,4)	V
$V_{GE(th)}$	$V_{GE} = V_{CE}$, $I_C = 0,3\text{ mA}$	5	5,8	6,5	V
$V_{CE(TO)}$	$T_j = 25\text{ (125) }^\circ\text{C}$		1 (0,9)	1,2 (1,1)	V
r_T	$T_j = 25\text{ (125) }^\circ\text{C}$		87 (138)	113 (162)	m Ω
C_{ies}	$V_{CE} = 25\text{ V}$, $V_{GE} = 0\text{ V}$, $f = 1\text{ MHz}$		0,7		nF
C_{oes}	$V_{CE} = 25\text{ V}$, $V_{GE} = 0\text{ V}$, $f = 1\text{ MHz}$		0,1		nF
C_{res}	$V_{CE} = 25\text{ V}$, $V_{GE} = 0\text{ V}$, $f = 1\text{ MHz}$		0,1		nF
$R_{th(j-s)}$	per IGBT		1,5		K/W
$t_{d(on)}$	under following conditions		35		ns
t_r	$V_{CC} = 600\text{ V}$, $V_{GE} = \pm 15\text{ V}$		25		ns
$t_{d(off)}$	$I_C = 8\text{ A}$, $T_j = 125\text{ }^\circ\text{C}$		365		ns
t_f	$R_{Gon} = R_{Goff} = 50\text{ }\Omega$		105		ns
E_{on}	inductive load		0,8		mJ
E_{off}			0,95		mJ
Diode - Inverter					
$V_F = V_{EC}$	$I_F = 8\text{ A}$, $T_j = 25\text{ (125) }^\circ\text{C}$		1,9 (2)	2,2 (2,4)	V
$V_{(TO)}$	$T_j = 25\text{ (125) }^\circ\text{C}$		1 (0,8)	1,1 (0,9)	V
r_T	$T_j = 25\text{ (125) }^\circ\text{C}$		112 (150)	138 (187)	m Ω
$R_{th(j-s)}$	per diode		2,5		K/W
I_{RRM}	under following conditions		12		A
Q_{rr}	$I_F = 8\text{ A}$, $V_R = 600\text{ V}$		1,8		μC
E_{rr}	$V_{GE} = 0\text{ V}$, $T_j = 125\text{ }^\circ\text{C}$		0,9		mJ
	$di_F/dt = 520\text{ A}/\mu\text{s}$				
Temperature Sensor					
R_{ts}	3 %, $T_f = 25\text{ (100) }^\circ\text{C}$		1000(1670)		Ω
Mechanical Data					
m			21,5		g
M_s	Mounting torque	2		2,5	Nm

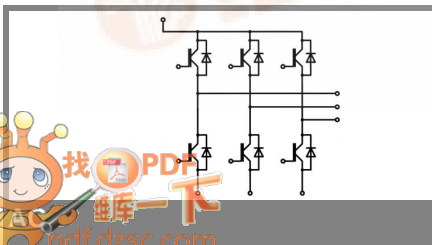

SKiiP 03AC126V1

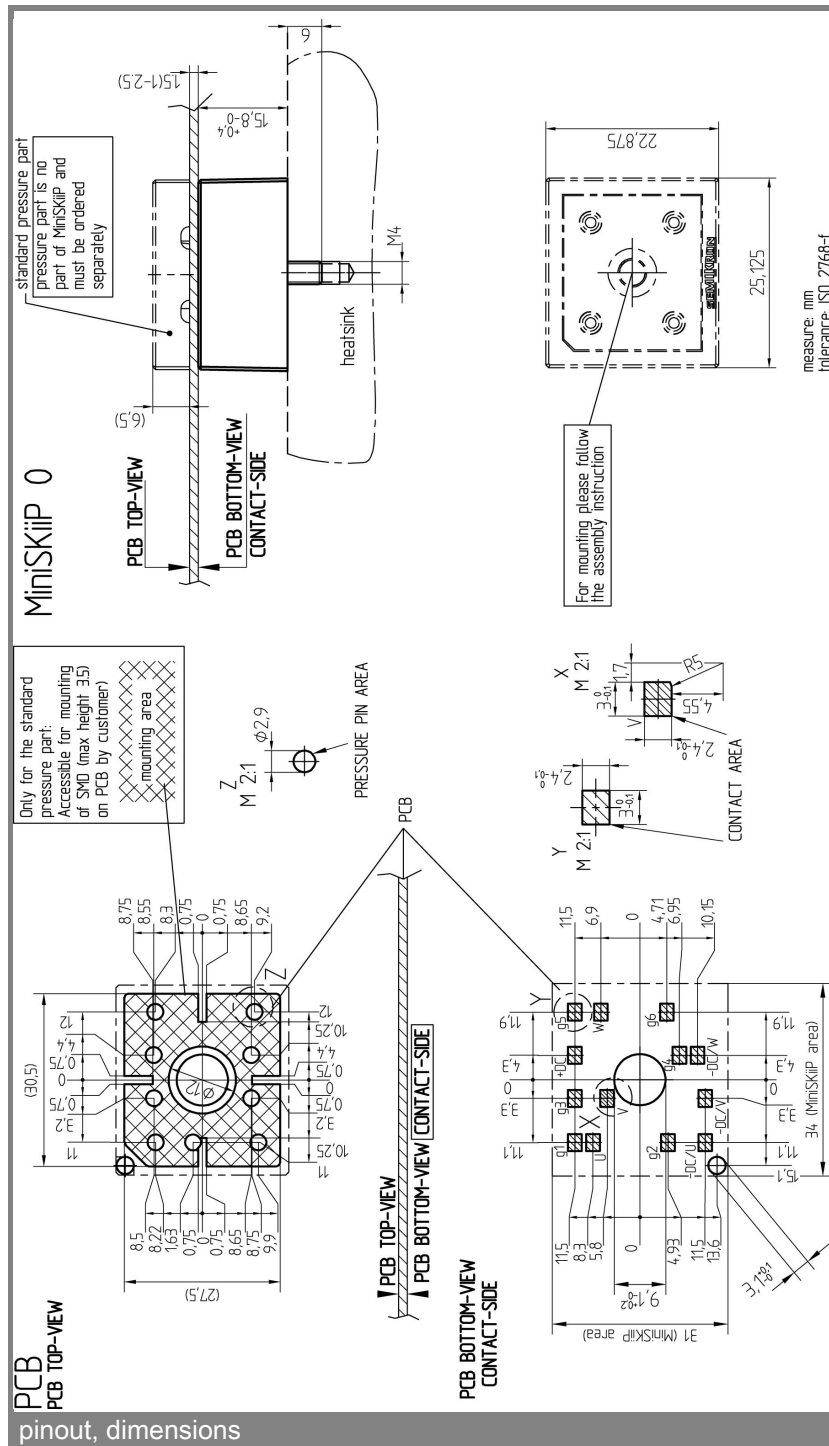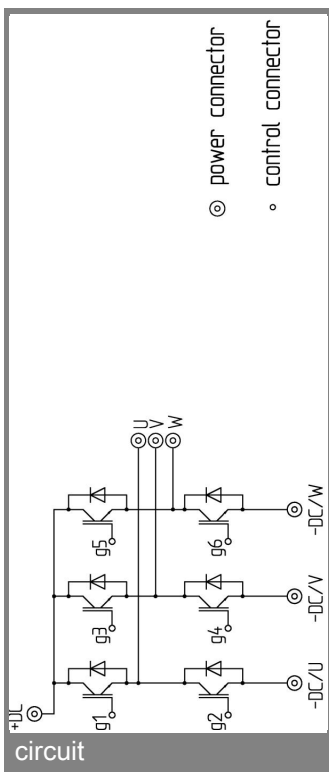

These documents are Semikron property. Semikron reserves all rights. No part of this document may be reproduced or transmitted in any form or by any means electronic or mechanical, including photocopying and recording, or by any information storage or retrieval system, without permission in writing from Semikron. Semikron reserves all rights.

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.