



**SDT05S60**

**Silicon Carbide Schottky Diode**


- Worlds first 600V Schottky diode
- Revolutionary semiconductor material - Silicon Carbide
- Switching behavior benchmark
- No reverse recovery
- No temperature influence on the switching behavior
- No forward recovery
- Pb-free lead plating; RoHS compliant
- Qualified according to JEDEC<sup>0)</sup> for target applications

**thinQ!™ SiC Schottky Diode**

**Product Summary**

$V_{RRM}$	600	V
$Q_C$	14	nC
$I_F$	5	A

PG-TO220-2-2.



Type	Package	Ordering Code	Marking	Pin 1	Pin 2
SDT05S60	PG-TO220-2-2.	Q67040S4644	D05S60	C	A

**Maximum Ratings, at  $T_j = 25\text{ }^\circ\text{C}$ , unless otherwise specified**

Parameter	Symbol	Value	Unit
Continuous forward current, $T_C=100\text{ }^\circ\text{C}$	$I_F$	5	A
RMS forward current, $f=50\text{Hz}$	$I_{FRMS}$	7.1	
Surge non repetitive forward current, sine halfwave $T_C=25\text{ }^\circ\text{C}$ , $t_p=10\text{ms}$	$I_{FSM}$	18.5	
Repetitive peak forward current $T_j=150\text{ }^\circ\text{C}$ , $T_C=100\text{ }^\circ\text{C}$ , $D=0.1$	$I_{FRM}$	21	
Non repetitive peak forward current $t_p=10\mu\text{s}$ , $T_C=25\text{ }^\circ\text{C}$	$I_{FMAX}$	50	
$i^2t$ value, $T_C=25\text{ }^\circ\text{C}$ , $t_p=10\text{ms}$	$\int i^2 dt$	1.7	$\text{A}^2\text{s}$
Repetitive peak reverse voltage	$V_{RRM}$	600	V
Surge peak reverse voltage	$V_{RSM}$	600	
Power dissipation, $T_C=25\text{ }^\circ\text{C}$	$P_{tot}$	43	W
Operating and storage temperature	$T_j, T_{stg}$	-55... +175	$^\circ\text{C}$

**Thermal Characteristics**

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>Characteristics</b>					
Thermal resistance, junction - case	$R_{thJC}$	-	-	3.5	K/W
Thermal resistance, junction - ambient, leaded	$R_{thJA}$	-	-	62	

**Electrical Characteristics, at  $T_j = 25\text{ }^\circ\text{C}$ , unless otherwise specified**


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>Static Characteristics</b>					
Diode forward voltage	$V_F$				V
$I_F=5\text{A}, T_j=25\text{ }^\circ\text{C}$		-	1.5	1.7	
$I_F=5\text{A}, T_j=150\text{ }^\circ\text{C}$		-	1.7	2.1	
Reverse current	$I_R$				$\mu\text{A}$
$V_R=600\text{V}, T_j=25\text{ }^\circ\text{C}$		-	19	200	
$V_R=600\text{V}, T_j=150\text{ }^\circ\text{C}$		-	45	1000	

**Electrical Characteristics, at  $T_j = 25\text{ }^\circ\text{C}$ , unless otherwise specified**

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>AC Characteristics</b>					
Total capacitive charge $V_R=400\text{V}, I_F=5\text{A}, di_F/dt=200\text{A}/\mu\text{s}, T_j=150^\circ\text{C}$	$Q_C$	-	14	-	nC
Switching time $V_R=400\text{V}, I_F=5\text{A}, di_F/dt=200\text{A}/\mu\text{s}, T_j=150^\circ\text{C}$	$t_{rr}$	-	n.a	-	ns
Total capacitance $V_R=1\text{V}, T_C=25^\circ\text{C}, f=1\text{MHz}$ $V_R=300\text{V}, T_C=25^\circ\text{C}, f=1\text{MHz}$ $V_R=600\text{V}, T_C=25^\circ\text{C}, f=1\text{MHz}$	$C$	-	170 16 12	-	pF

**1 Power dissipation**


$P_{tot} = f(T_C)$

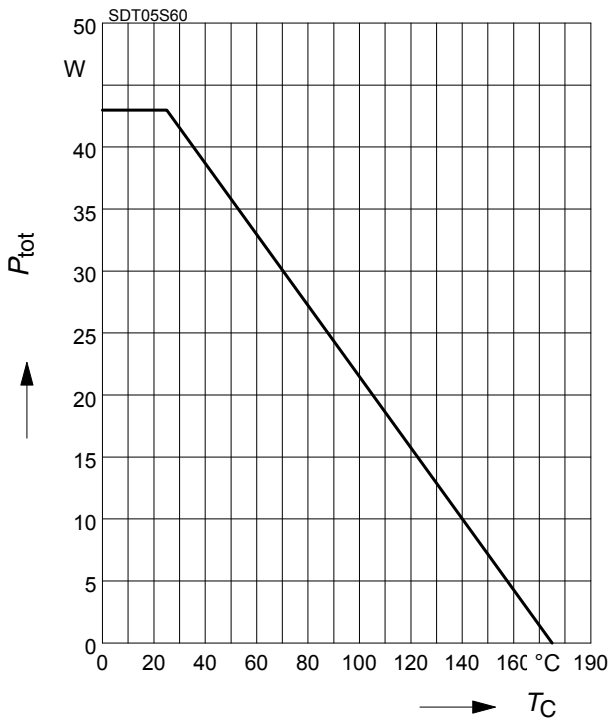

**2 Diode forward current**

$I_F = f(T_C)$


parameter:  $T_j \leq 175^\circ\text{C}$

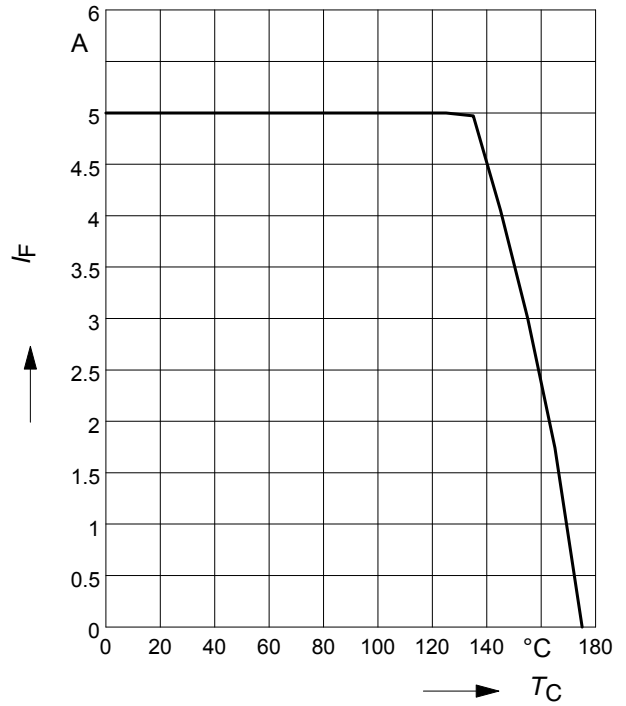

**3 Typ. forward characteristic**


$I_F = f(V_F)$

parameter:  $T_j$ ,  $t_p = 350 \mu\text{s}$

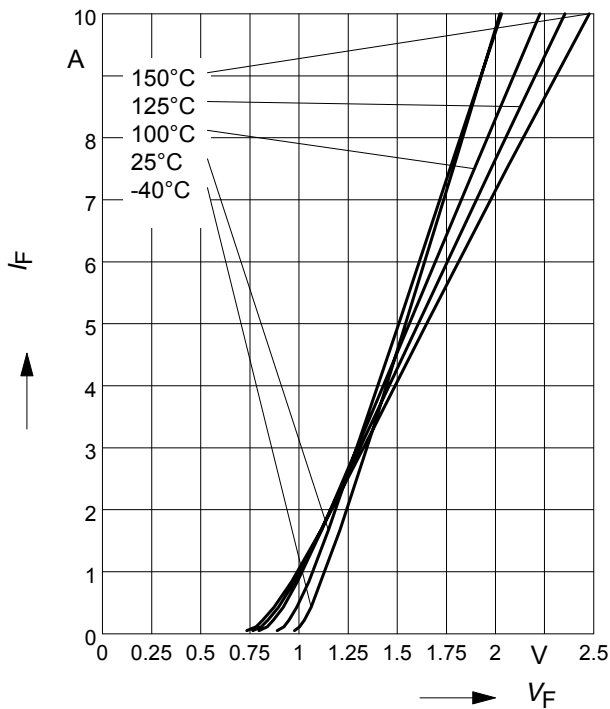


**4 Typ. forward power dissipation vs. average forward current**

$P_{F(AV)} = f(I_F)$   $T_C = 100^\circ\text{C}$ ,  $d = t_p/T$

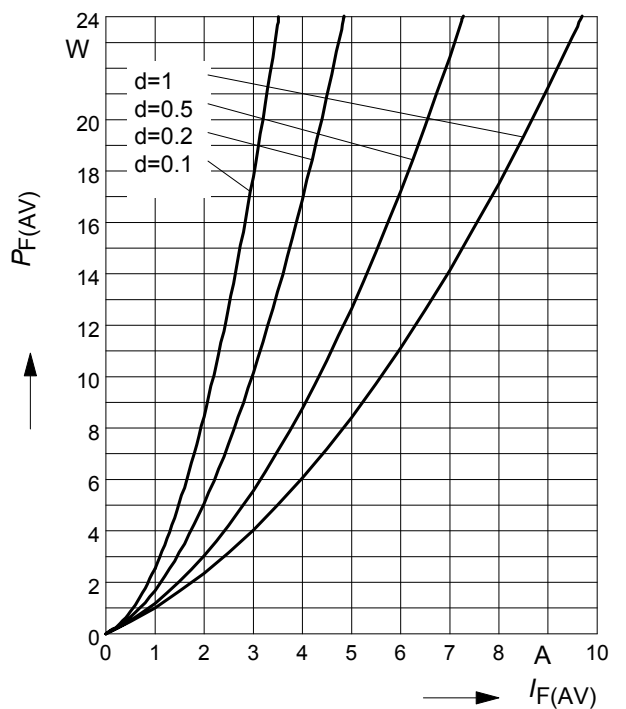

**5 Typ. reverse current vs. reverse voltage**


$I_R = f(V_R)$

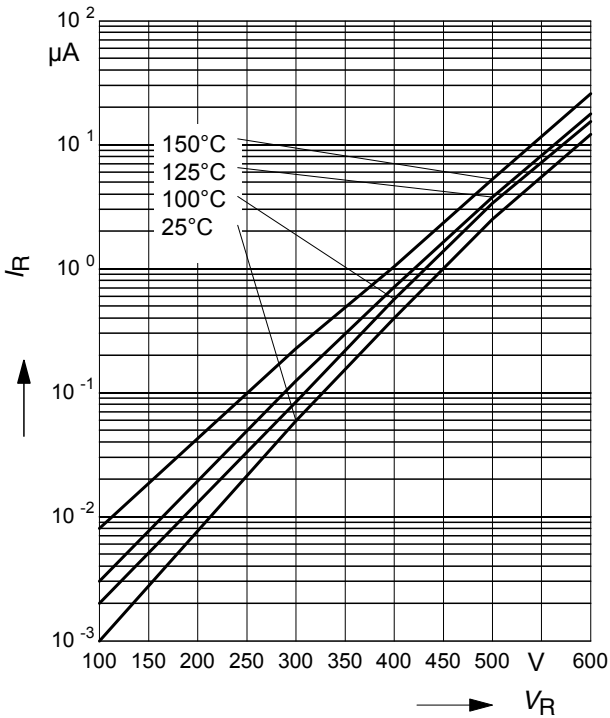

**6 Transient thermal impedance**

$Z_{thJC} = f(t_p)$


parameter :  $D = t_p/T$

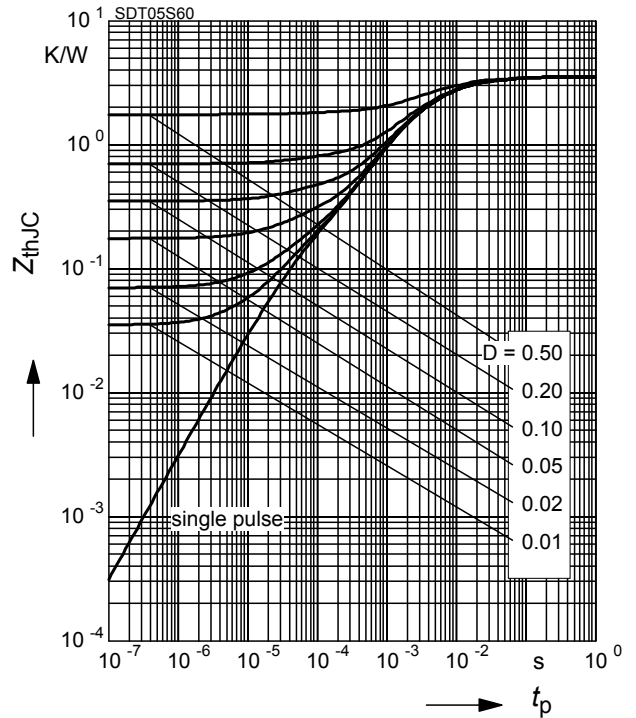

**7 Typ. capacitance vs. reverse voltage**


$C = f(V_R)$

parameter:  $T_C = 25^\circ C, f = 1 MHz$

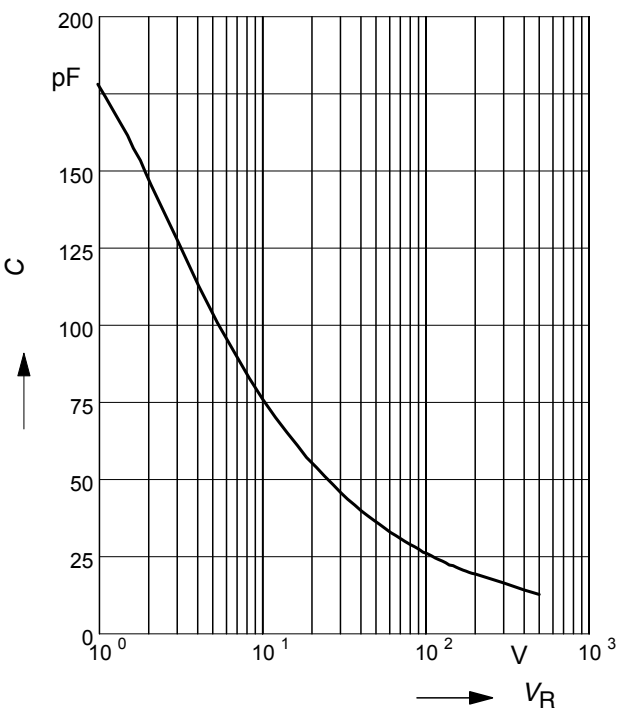

**8 Typ. C stored energy**


$E_C = f(V_R)$

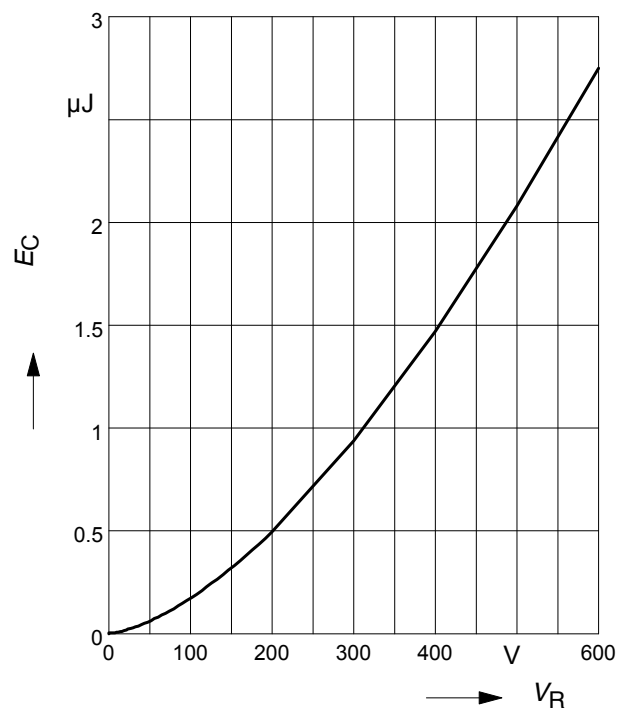


9 Typ. capacitive charge vs. current slope

$$Q_c = f(di_F/dt)$$

parameter:  $T_j = 150\text{ }^\circ\text{C}$

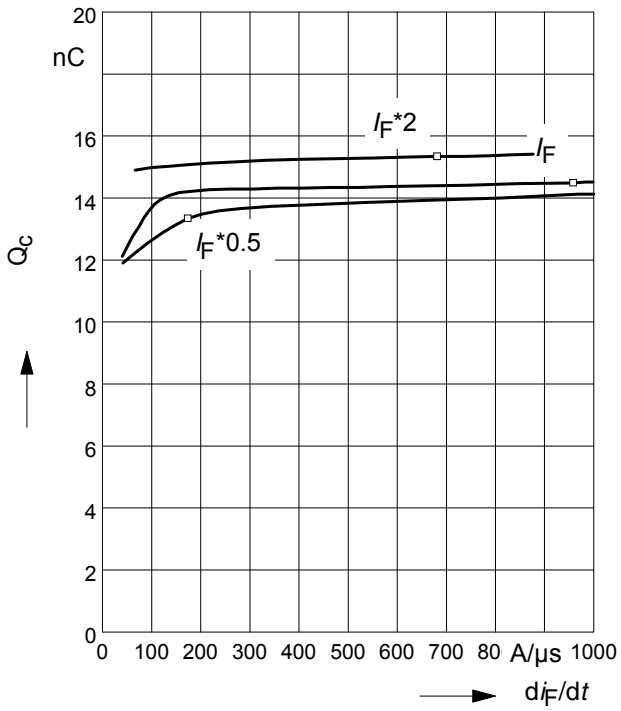

PG-TO-220-2-2

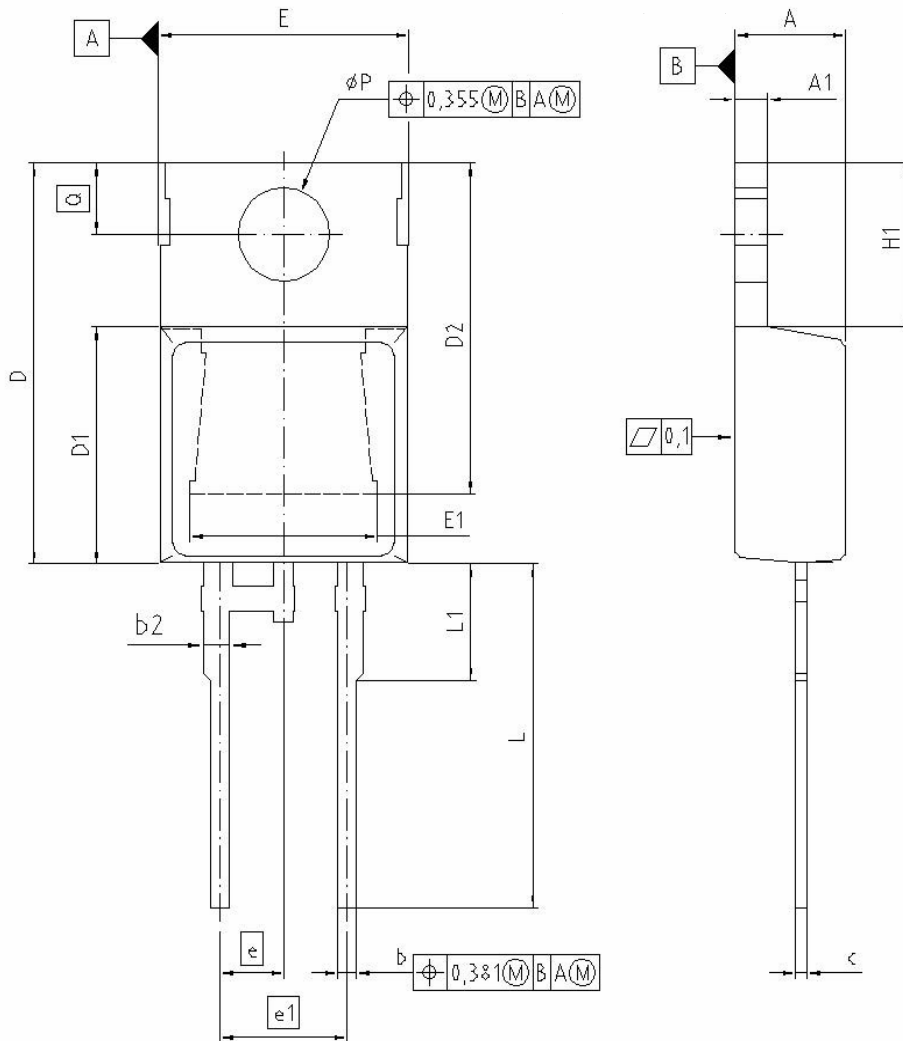

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.191	4.699	0.165	0.185
A1	1.170	1.400	0.046	0.055
A2	2.215	2.718	0.087	0.107
b	0.635	0.889	0.025	0.035
b2	0.950	1.651	0.037	0.065
c	0.330	0.635	0.013	0.025
D	14.808	15.950	0.583	0.628
D1	8.509	9.450	0.335	0.372
D2	12.850	14.245	0.506	0.561
E	9.677	10.363	0.381	0.408
E1	6.500	8.788	0.256	0.346
e	2.540		0.100	
e1	5.080		0.200	
N	2		2	
H1	5.900	6.900	0.232	0.272
L	12.700	14.000	0.500	0.551
L1	3.048	4.800	0.120	0.189
phi P	3.550	3.886	0.140	0.153
Q	2.540	3.048	0.100	0.120

**REFERENCE**  
..

**SCALE**

**EUROPEAN PROJECTION**

**ISSUE DATE**  
04-10-2005

**FILE**  
TO220\_3

**Published by**  
**Infineon Technologies AG,**  
**Bereichs Kommunikation**  
**St.-Martin-Strasse 53,**  
**D-81541 München**  
**© Infineon Technologies AG 1999**  
**All Rights Reserved.**

**Attention please!**

The information herein is given to describe certain components and shall not be considered as warranted characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

**Information**

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives worldwide (see address list).

**Warnings**

Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.