



DG304B/306B/307B

Vishay Siliconix

CMOS Analog Switches

FEATURES

- $\pm 15\text{-V}$ Input Range
- Fast Switching— t_{ON} : 110 ns
- Low $r_{DS(on)}$: 30 Ω
- Single Supply Operation
- CMOS Logic Levels
- Micropower: 30 nW

BENEFITS

- Full Rail-to-Rail Analog Signal Range
- Low Signal Error
- Wide Dynamic Range
- Low Power Dissipation

APPLICATIONS

- Low Level Switching Circuits
- Programmable Gain Amplifiers
- Portable and Battery Powered Systems

DESCRIPTION


The DG304B, DG306B and DG307B monolithic CMOS switches were designed for applications in communications, instrumentation and process control. This series is well suited for applications requiring fast switching and nearly flat on-resistance over the entire analog range.

Designed on the Vishay Siliconix PLUS-40 CMOS process to achieve low power consumption and excellent on/off switch performance, these switches are ideal for battery powered

applications, without sacrificing switching speed. Break-before-make switching action is guaranteed, and an epitaxial layer prevents latchup. Single supply operation (for positive switch voltages) is allowed by connecting the V^- rail to 0 V.


Each switch conducts equally well in both directions when on, and blocks up to the supply voltage when off. These switches are CMOS input compatible.

FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION

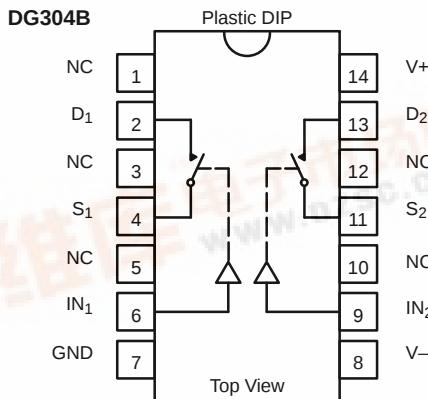

TRUTH TABLE	
Logic	Switch
0	OFF
1	ON

Logic "0" $\leq 3.5\text{ V}$
Logic "1" $\geq 11\text{ V}$

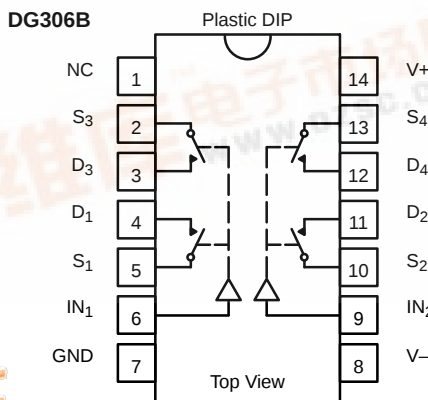

TRUTH TABLE	
Logic	Switch
0	OFF
1	ON

Logic "0" $\leq 3.5\text{ V}$
Logic "1" $\geq 11\text{ V}$



DG304B/306B/307B


Vishay Siliconix



FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION

DG306B

Plastic DIP

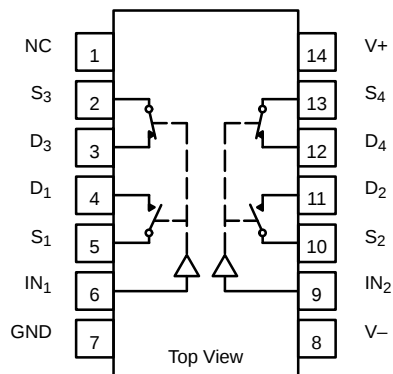

Four SPST Switches per Package

TRUTH TABLE

Logic	SW ₁ , SW ₂	SW ₃ , SW ₄
0	OFF	ON
1	ON	OFF

Logic "0" ≤ 3.5 V
Logic "1" ≥ 11 V

ORDERING INFORMATION

Temp Range	Package	Part Number
DG304B		
-40 to 85°C	14-Pin Plastic DIP	DG304BDJ
DG306B		
-40 to 85°C	14-Pin Plastic DIP	DG306BDJ
DG307B		
-40 to 85°C	14-Pin Plastic DIP	DG307BDJ

ABSOLUTE MAXIMUM RATINGS

Voltages Referenced to V-

V+ 44 V

GND 25 V

Digital Inputs^a, V_S, V_D (V-) -2 V to (V+) +2V or
30 mA, whichever occurs first

Current, Any Terminal 30 mA

Continuous Current, S or D

(Pulsed at 1 ms, 10% duty cycle max) 100 mA

Storage Temperature -65 to 150°C

Power Dissipation^b

14-Pin Plastic DIP^c 470 mW

Notes:

- Signals on S_x, D_x, or IN_x exceeding V+ or V- will be clamped by internal diodes. Limit forward diode current to maximum current ratings.
- All leads welded or soldered to PC Board.
- Derate 11 mW/°C above 75°C



DG304B/306B/307B







Vishay Siliconix

SPECIFICATIONS ^a								
Parameter	Symbol	Test Conditions Unless Specified V ₊ = 15 V, V _– = –15 V V _{IN} = 3.5 V or 11 V ^f	Temp ^b	Limits –40 to 85°C			Unit	
				Min ^d	Typ ^c	Max ^d		
Analog Switch								
Analog Signal Range ^e	V _{ANALOG}		Full	–15		15	V	
Drain-Source On-Resistance	r _{DS(on)}	V _D = ± 10 V, I _S = 10 mA	Room Full		30	50 75	Ω	
Source Off Leakage Current	I _{S(off)}	V _S = ± 14 V V _D = ∓ 14 V	Room Full	–5 –100	± 0.1	5 100	nA	
Drain Off Leakage Current	I _{D(off)}	V _S = ± 14 V V _D = ∓ 14 V	Room Full	–5 –100	± 0.1	5 100		
Drain On Leakage Current	I _{D(on)}	V _D = V _S = ± 14 V	Room Full	–5 –200	± 0.1	5 200		
Digital Control								
Input Current with Input Voltage High	I _{INH}	V _{IN} = 5 V	Room Full	–1	–0.001		μA	
		V _{IN} = 15 V	Room Full		0.001	1		
Input Current with Input Voltage Low	I _{INL}	V _{IN} = 0 V	Room Full	–1	–0.001			
Dynamic Characteristics								
Turn-On Time	t _{ON}	See Figure 2	Room		110		ns	
Turn-Off Time	t _{OFF}		Room		70			
Break-Before-Make Time	t _{OPEN}	DG305A/307A ONLY, See Figure 3	Room		50			
Charge Injection	Q	C _L = 1 nF, R _{gen} = 0, V _{gen} = 0 V, See Figure 4		Room		30	pC	
Source-Off Capacitance	C _{S(off)}	f = 1 MHz, V _S = 0 V V _S , V _D = 0 V		Room		14	pF	
Drain-Off Capacitance	C _{D(off)}			Room		14		
Channel-On Capacitance	C _{D(on)}			Room		40		
Input Capacitance	C _{IN}	f = 1 MHz	V _{IN} = 0 V	Room		6		
			V _{IN} = 15 V	Room		7		
Off-Isolation	OIRR	V _{IN} = 0 V, R _L = 1 kΩ V _S = 1 V _{rms} , f = 500 kHz		Room		62	dB	
Crosstalk (Channel-to-Channel)	X _{TALK}			Room		74		
Power Supplies								
Positive Supply Current	I ₊	V _{IN} = 15 V or 0 V (All Inputs)		Room Full		0.001	100	μA
Negative Supply Current	I _–			Room Full	–100	–0.001		

Notes:


- Refer to PROCESS OPTION FLOWCHART.
- Room = 25°C, Full = as determined by the operating temperature suffix.
- Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
- Guaranteed by design, not subject to production test.
- V_{IN} = input voltage to perform proper function.

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

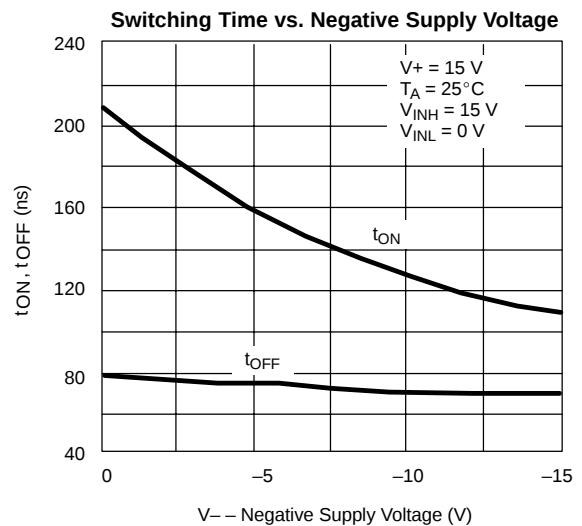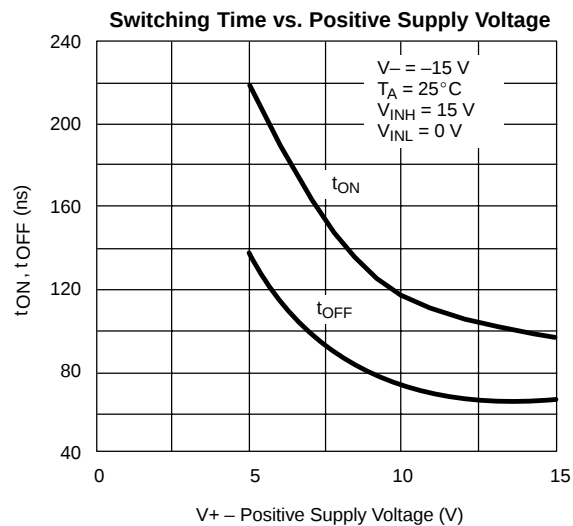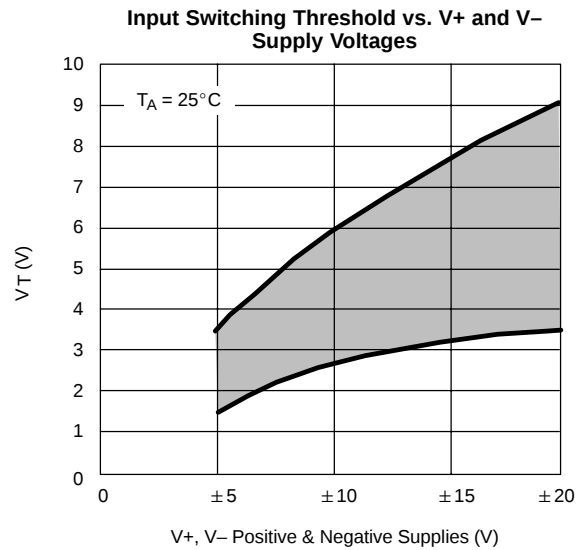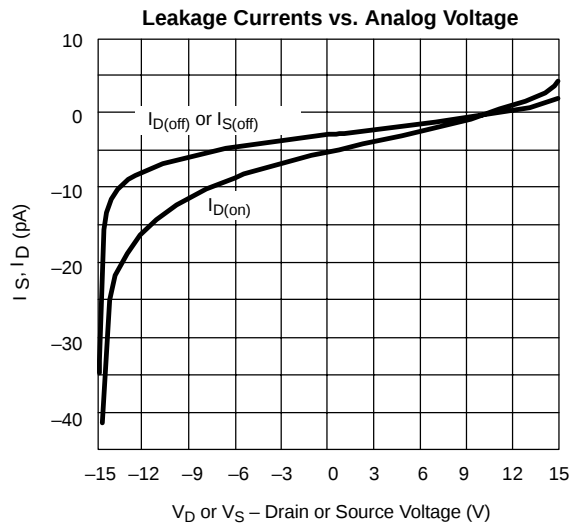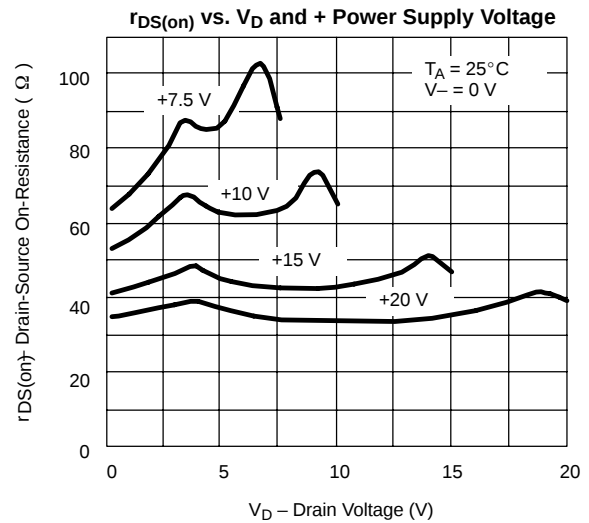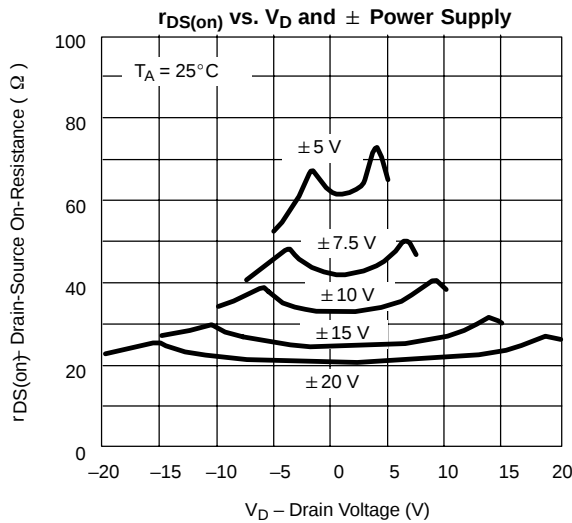



TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

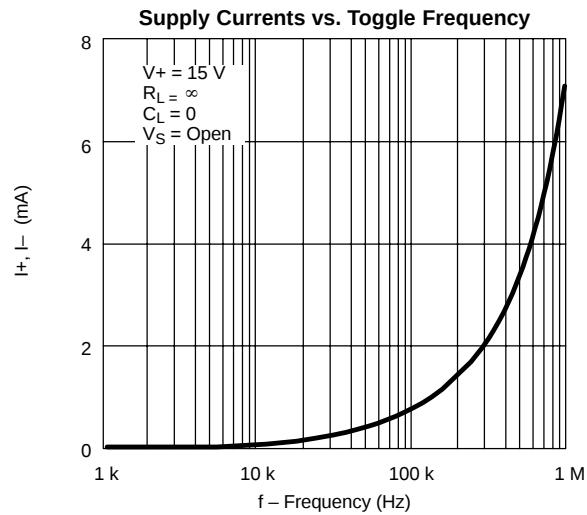

SCHEMATIC DIAGRAM (TYPICAL CHANNEL)

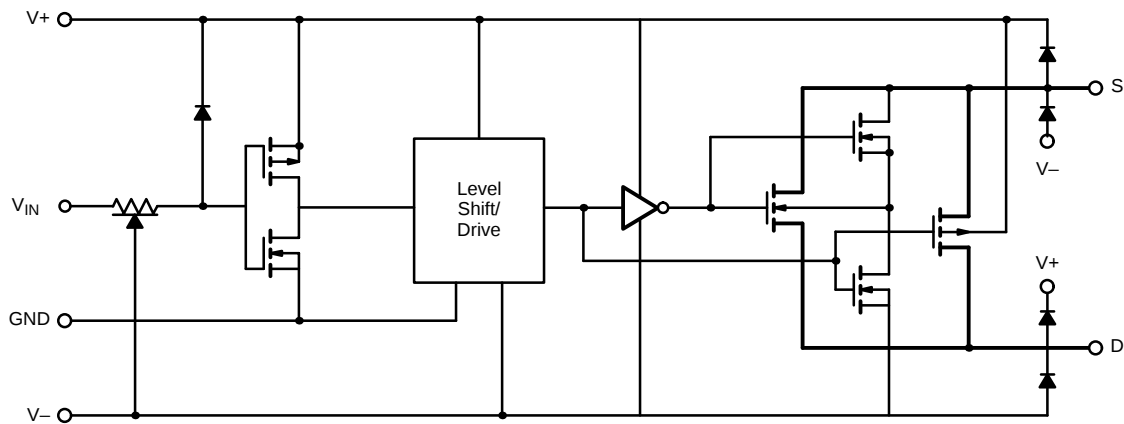


FIGURE 1.

TEST CIRCUITS

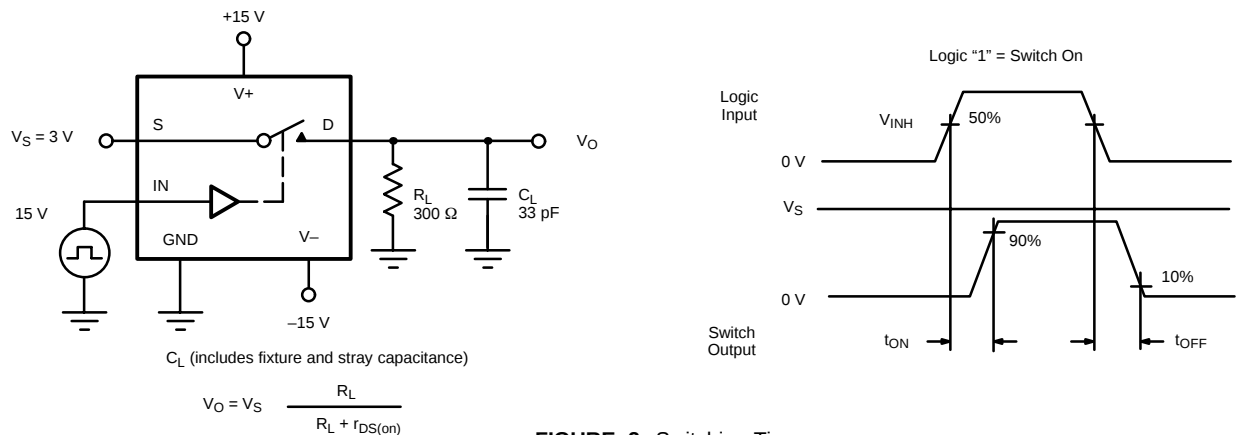


FIGURE 2. Switching Time

DG304B/306B/307B

Vishay Siliconix



TEST CIRCUITS

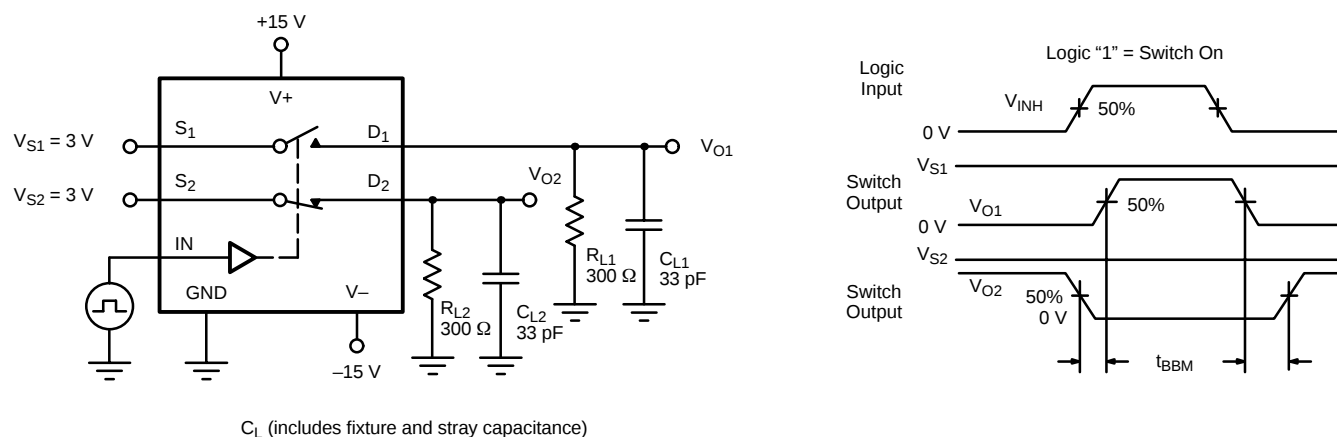


FIGURE 3. Break-Before-Make SPDT (DG307B)

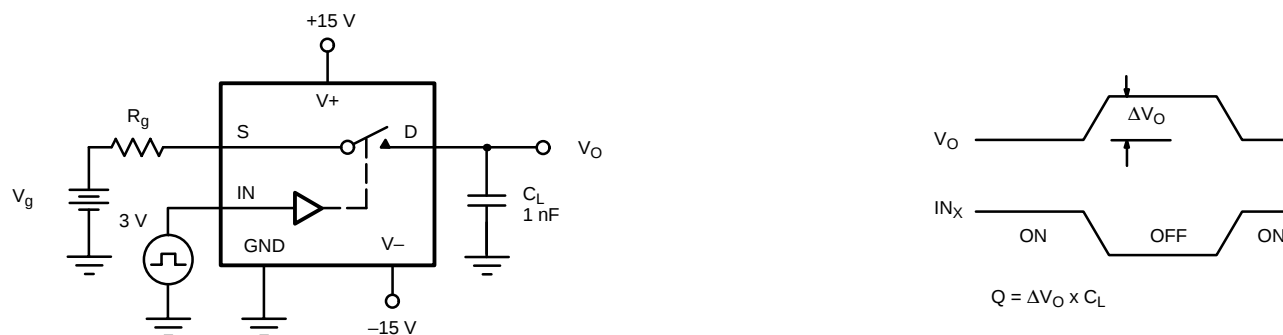


FIGURE 4. Charge Injection

APPLICATION HINTS^a

V+ Positive Supply Voltage (V)	V- Negative Supply Voltage (V)	GND Voltage (V)	V _{IN} Logic Input Voltage V _{INH(min)} /V _{INL(max)} (V)	V _S or V _D Analog Voltage Range (V)
15	-15	0	11/3.5	-15 to 15
20	-20	0	11/3.5	-20 to 20
15	0	0	11/3.5	0 to 15

Notes:

a. Application Hints are for DESIGN AID ONLY, not guaranteed and not subject to production testing.



APPLICATIONS

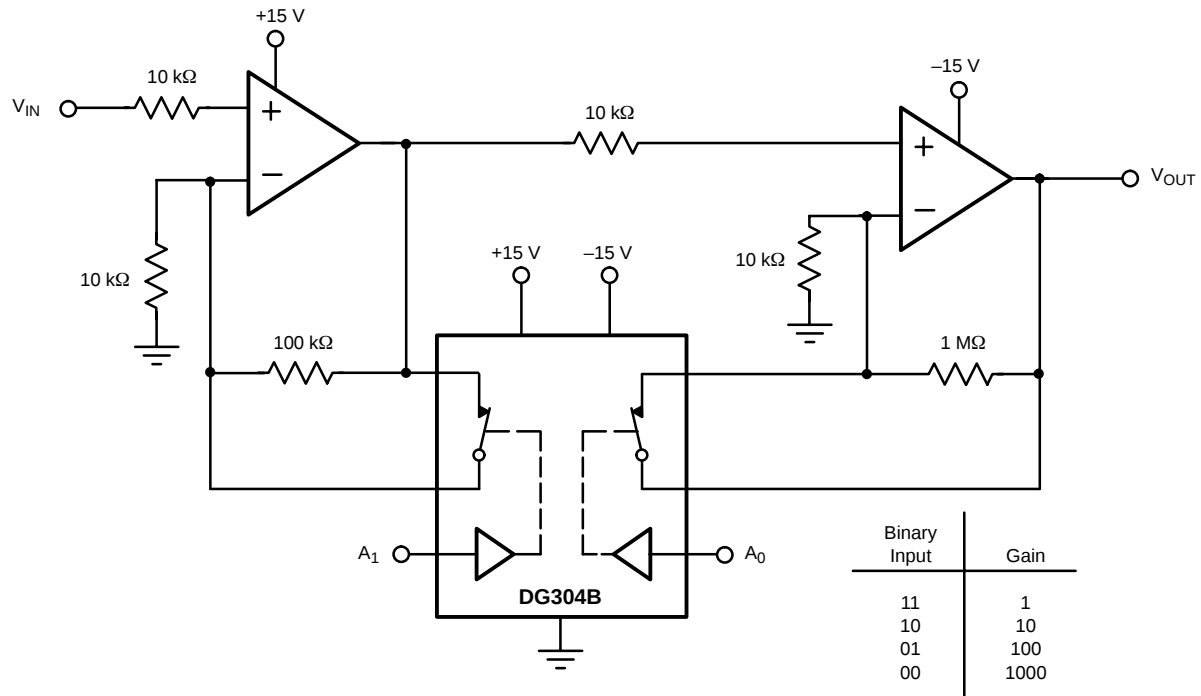


FIGURE 5. Low Power Binary to 10^n Gain Low Frequency Amplifier

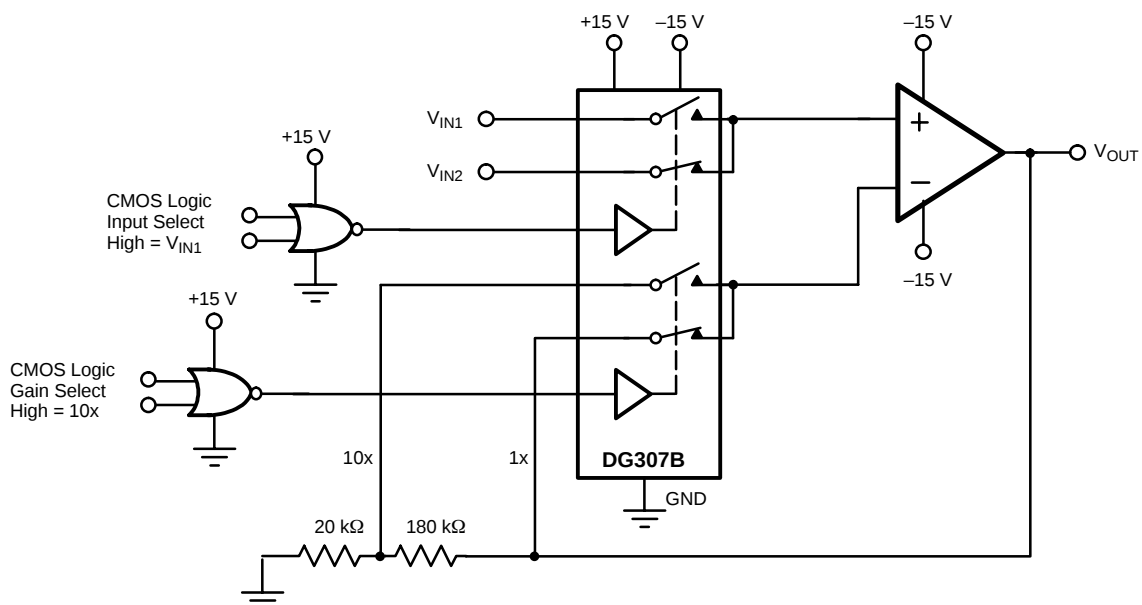


FIGURE 6. Low Power Non-Inverting Amplifier with Digitally Selectable Inputs and Gain

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.