



July 1986

## DS8907 AM/FM Digital Phase-Locked Loop Frequency Synthesizer

### General Description

The DS8907 is a PLL synthesizer designed specifically for use in AM/FM radios. It contains the reference oscillator, a phase comparator, a charge pump, a 120 MHz ECL/I<sup>2</sup>L dual modulus programmable divider, and an 18-bit shift register/latch for serial data entry. The device is designed to operate with a serial data controller generating the necessary division codes for each frequency, and logic state information for radio function inputs/outputs.

The Colpitts reference oscillator for the PLL operates at 4 MHz. A chain of dividers is used to generate a 500 kHz clock signal for the external controller. Additional dividers generate a 25 kHz reference signal for FM and a 10 kHz reference signal for AM. One of these reference signals is selected by the data from the controller for use by the phase comparator.

Data is transferred between the frequency synthesizer and the controller via a 3 wire bus system. This consists of a data input line, an enable line, and a clock line. When the enable line is low, data can be shifted from the controller into the frequency synthesizer. When the enable line is transitioned from low to high, data entry is disabled and data present in the shift register is latched.

From the controller 20-bit data stream, the first 2 bits address the device permitting other devices to share the same bus. Of the remaining 18-bit data word, the next 13 bits are used for the PLL divide code. The remaining 5 bits are connected via latches to output pins. These 5 bits can be used to drive radio functions such as gain, mute, FM, AM and stereo only. These outputs are open collector. Bit 16 is used internally to select the AM or FM local oscillator input and to select between the 10 kHz and 25 kHz reference. A high level at bit 16 indicates FM and a low level indicates AM.

The PLL consists of a 13-bit programmable I<sup>2</sup>L divider, an ECL phase comparator, an ECL dual modulus (p/p + 1) prescaler, and a high speed charge pump. The programma-


ble divider divides by (N + 1), N being the number loaded into the shift register (bits 1–13 after address). It is clocked by the AM input via an ECL ÷ 7/8 prescaler, or through a ÷ 63/64 prescaler from the FM input. The AM input will work at frequencies up to 15 MHz, while the FM input works up to 120 MHz. The AM band is tuned with a frequency resolution of 10 kHz and the FM band is tuned with a resolution of 25 kHz. The buffered AM and FM inputs are self biased and can be driven directly by the VCO through a capacitor. The ECL phase comparator produces very accurate resolution of the phase difference between the input signal and the reference oscillator. The high speed charge pump consists of a switchable constant current source (–0.3 mA) and a switchable constant current sink (+0.3 mA). If the VCO frequency is low, the charge pump will source current, and sink current if the VCO frequency is high. When using an AFC the charge pump output may be forced into TRI-STATE® by applying a low level to the charge pump enable input.

A separate V<sub>CCM</sub> pin (typically drawing 1.5 mA) powers the oscillator and reference chain to provide controller clocking frequencies when the balance of the PLL is powered down.

### Features

- Uses inexpensive 4 MHz reference crystal
- F<sub>IN</sub> capability greater than 120 MHz allows direct synthesis at FM frequencies
- FM resolution of 25 kHz allows usage of 10.7 MHz ceramic filter distribution
- Serial data entry for simplified control
- 50 Hz output for "time-of-day" reference driven from separate low power V<sub>CCM</sub>
- 5-open collector buffered outputs for controlling various radio functions
- Separate AM and FM inputs. AM input has 15 mV (typical) hysteresis

### Connection Diagram

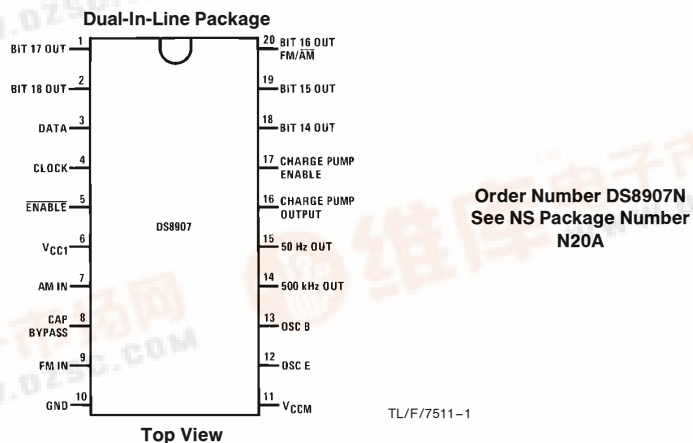

TRI-STATE® is a registered trademark of National Semiconductor Corporation.



**Absolute Maximum Ratings** (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage

(V<sub>CC1</sub>)(V<sub>CCM</sub>)

Input Voltage

Output Voltage

7V

7V

7V

7V

Storage Temperature Range

−65°C to +150°C

Lead Temperature (Soldering, 4 sec.)

260°C

**Operating Conditions**

|                                 | Min  | Max  | Units |
|---------------------------------|------|------|-------|
| Supply Voltage, V <sub>CC</sub> |      |      |       |
| V <sub>CC1</sub>                | 4.75 | 5.25 | V     |
| V <sub>CCM</sub>                | 4.5  | 6.0  | V     |
| Temperature, T <sub>A</sub>     | 0    | 70   | °C    |

**DC Electrical Characteristics** (Notes 2 and 3)

| Symbol                    | Parameter   | Conditions   | Min                               | Typ                | Max                   | Units          |
|---------------------------|---|--|-----------------------------------|--------------------|-----------------------|----------------|
| V <sub>IH</sub>           | Logical “1” Input Voltage                                   |  | 2.1                               |                    |                       | V              |
| I <sub>IH</sub>           | Logical “1” Input Current                                   | V <sub>IN</sub> = 2.7V   |                                   | 0                  | 10                    | μA             |
| V <sub>IL</sub>           | Logical “0” Input Voltage                                   |  |                                   |                    | 0.7                   | V              |
| I <sub>IL</sub>           | Logical “0” Input Current                                   | Data, Clock, and $\overline{\text{ENABLE}}$ Inputs, V <sub>IN</sub> = 0V     |                                   | −5                 | −25                   | μA             |
| I <sub>IL</sub>           | Logical “0” Input Current                                   | Charge Pump Enable, V <sub>IN</sub> = 0V                                     |                                   | −250               | −450                  | μA             |
| I <sub>OH</sub>           | Logical “1” Output Current<br>All Bit Outputs, 50 Hz Output | V <sub>OH</sub> = 5.25V  |                                   |                    | 50                    | μA             |
|                           | 500 kHz Output  | V <sub>OH</sub> = 2.4V, V <sub>CCM</sub> = 4.5V                              |                                   |                    | −250                  | μA             |
| V <sub>OL</sub>           | Logical “0” Output Voltage<br>All Bit Outputs               | I <sub>OL</sub> = 5 mA   |                                   |                    | 0.5                   | V              |
|                           | 50 Hz Output, 500 Hz Output                                 | I <sub>OL</sub> = 250 μA   |                                   |                    | 0.5                   | V              |
| I <sub>CC1</sub>          | Supply Current (V <sub>CC1</sub> )                          | All Bits Outputs High  |                                   | 90                 | 160                   | mA             |
| I <sub>CCM(STANDBY)</sub> | V <sub>CCM</sub> Supply Current                             | V <sub>CCM</sub> = 6.0V, All Other Pins Open                                 |                                   | 1.5                | 4.0                   | mA             |
| I <sub>OUT</sub>          | Charge Pump Output Current                                  | 1.2V ≤ V <sub>OUT</sub> ≤ V <sub>CCM</sub> − 1.2V<br>V <sub>CCM</sub> ≤ 6.0V | Pump Up<br>Pump Down<br>TRI-STATE | −0.10<br>0.10<br>0 | −0.30<br>0.30<br>±100 | mA<br>mA<br>nA |
| I <sub>CCM(OPERATE)</sub> | V <sub>CCM</sub> Supply Current                             | V <sub>CCM</sub> = 6.0V, V <sub>CC1</sub> = 5.25V,<br>All Other Pins Open    |                                   | 2.5                | 6.0                   | mA             |

**AC Electrical Characteristics** V<sub>CC</sub> = 5V, T<sub>A</sub> = 25°C, t<sub>r</sub> ≤ 10 ns, t<sub>f</sub> ≤ 10 ns

| Symbol                  | Parameter  | Conditions  | Min      | Typ       | Max      | Units      |
|-------------------------|--|---|----------|-----------|----------|------------|
| V <sub>IN(MIN)(F)</sub> | F <sub>IN</sub> Minimum Signal Input   | AM and FM Inputs, 0°C ≤ T <sub>A</sub> ≤ 70°C               |          | 20        | 100      | mV (rms)   |
| V <sub>IN(MAX)(F)</sub> | F <sub>IN</sub> Maximum Signal Input   | AM and FM Inputs, 0°C ≤ T <sub>A</sub> ≤ 70°C               | 1000     | 1500      |          | mV (rms)   |
| F <sub>OPERATE</sub>    | Operating Frequency Range<br>(Sine Wave Input)   | V <sub>IN</sub> = 100 mV rms<br>0°C ≤ T <sub>A</sub> ≤ 70°C | AM<br>FM | 0.4<br>60 | 8<br>120 | MHz<br>MHz |
| R <sub>IN(FM)</sub>     | AC Input Resistance, FM  | 120 MHz, V <sub>IN</sub> = 100 mV rms                       | 300      |           |          | Ω          |
| R <sub>IN(AM)</sub>     | AC Input Resistance, AM  | 2 MHz, V <sub>IN</sub> = 100 mV rms                         | 1000     |           |          | Ω          |
| C <sub>IN</sub>         | Input Capacitance, FM and AM   | V <sub>IN</sub> = 120 MHz                                   | 3        | 6         | 10       | pF         |
| t <sub>EN1</sub>        | Minimum $\overline{\text{ENABLE}}$ High<br>Pulse Width   |   |          | 625       | 1250     | ns         |
| t <sub>EN0</sub>        | Minimum $\overline{\text{ENABLE}}$ Low<br>Pulse Width  |   |          | 375       | 750      | ns         |
| t <sub>CLKEN0</sub>     | Minimum Time Before $\overline{\text{ENABLE}}$<br>Goes Low That CLOCK Must<br>Be Low                   |   |          | −50       | 0        | ns         |
| t <sub>EN0CLK</sub>     | Minimum Time After $\overline{\text{ENABLE}}$<br>Goes Low That CLOCK Must<br>Remain Low                |   |          | 275       | 550      | ns         |
| t <sub>CLKEN1</sub>     | Minimum Time Before $\overline{\text{ENABLE}}$<br>Goes High That Last Positive<br>CLOCK Edge May Occur |   |          | 300       | 600      | ns         |

## AC Electrical Characteristics $V_{CC} = 5V$ , $T_A = 25^\circ C$ , $t_r \leq 10\text{ ns}$ , $t_f \leq 10\text{ ns}$ (Continued)








| Symbol       | Parameter  | Conditions | Min | Typ | Max | Units |
|--------------|--|------------|-----|-----|-----|-------|
| $t_{EN1CLK}$ | Minimum Time After ENABLE Goes High Before an Unused Positive CLOCK Edge May Occur |            |     | 175 | 350 | ns    |
| $t_{CLKH}$   | Minimum CLOCK High Pulse Width   |            |     | 275 | 550 | ns    |
| $t_{CLKL}$   | Minimum CLOCK Low Pulse Width  |            |     | 400 | 800 | ns    |
| $t_{DS}$     | Minimum DATA Setup Time, Minimum Time before CLOCK That DATA Must Be Valid         |            |     | 150 | 300 | ns    |
| $t_{DH}$     | Minimum DATA Hold Time, Minimum Time after CLOCK That DATA Must Remain Valid       |            |     | 400 | 800 | ns    |

**Note 1:** "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.




**Note 2:** Unless otherwise specified min/max limits apply across the  $-40^\circ C$  to  $+85^\circ C$  temperature range for the DS8907.

**Note 3:** All currents into device pins shown as positive, out of device pins as negative, all voltages referenced to ground unless otherwise noted. All values shown as max or min on absolute value basis.

## Schematic Diagrams (DS8907 AM/FM PLL typical Input/Output Schematics)

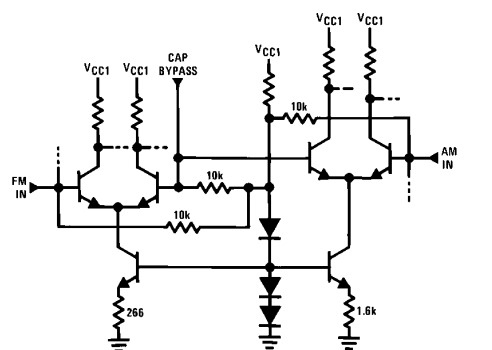

## Timing Diagrams\*

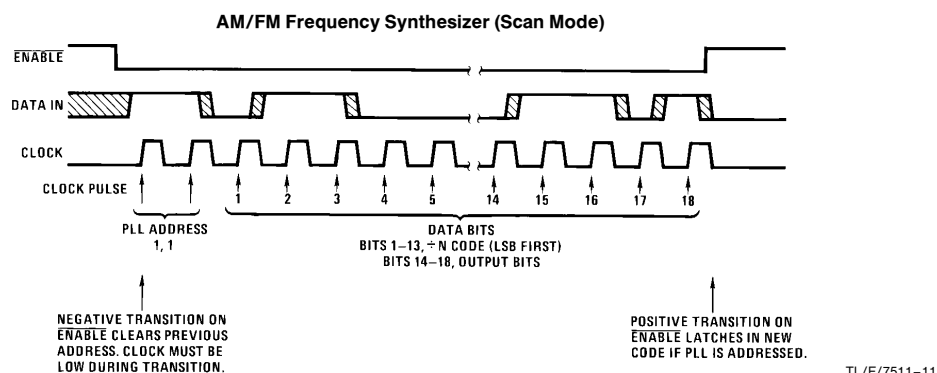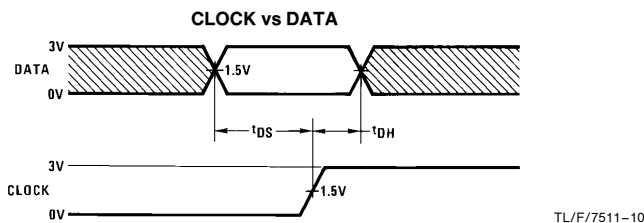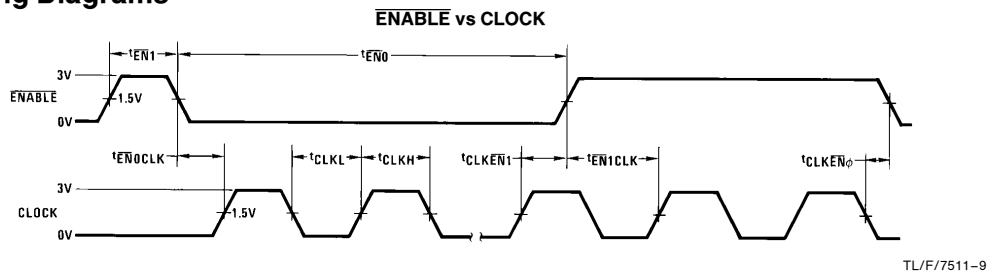

\*Timing diagrams are not drawn to scale. Scale within any one drawing may not be consistent, and intervals are defined positive as drawn.

### SERIAL DATA ENTRY INTO THE DS8907

Serial information entry into the DS8907 is enabled by a low level on the ENABLE input. One binary bit is then accepted from the DATA input with each positive transition of the CLOCK input. The CLOCK input must be low for the specified time preceding and following the negative transition of the ENABLE input.

The first two bits accepted following the negative transition of the ENABLE input are interpreted as address. If these address bits are *not* 1,1 *no* further information will be accepted from the DATA inputs, and the internal data latches *will not* be changed when ENABLE returns high.

If these first two bits *are* 1,1, then all succeeding bits are *accepted* as data, and are shifted successively into the internal shift register as long as ENABLE remains low.

Any data bits preceding the 18th to last bit will be shifted out, and thus are irrelevant. Data bits are counted as any bits *following* two valid address bits (1,1) with the ENABLE low. When the ENABLE input returns high, any further serial data entry is inhibited. Upon this positive transition, the data in the internal shift register is transferred into the internal data latches. Note that until this time, the states of the internal data latches have remained unchanged.


These data bits are interpreted as follows:

| Data Bit Position | Data Interpretation            |
|-------------------|--------------------------------|
| Last              | Bit 18 Output (Pin 2)          |
| 2nd to Last       | Bit 17 Output (Pin 1)          |
| 3rd to Last       | Bit 16 Output (FM/AM) (Pin 20) |
| 4th to Last       | Bit 15 Output (Pin 19)         |
| 5th to Last       | Bit 14 Output (Pin 18)         |
| 6th to Last       | MSB of $\div N$ ( $2^{12}$ )   |
| 7th to Last       | ( $2^{11}$ )                   |
| 8th to Last       | ( $2^{10}$ )                   |
| 9th to Last       | ( $2^9$ )                      |
| 10th to Last      | ( $2^8$ )                      |
| 11th to Last      | ( $2^7$ )                      |
| 12th to Last      | ( $2^6$ )                      |
| 13th to Last      | ( $2^5$ )                      |
| 14th to Last      | ( $2^4$ )                      |
| 15th to Last      | ( $2^3$ )                      |
| 16th to Last      | ( $2^2$ )                      |
| 17th to Last      | ( $2^1$ )                      |
| 18th to Last      | LSB of $\div N$ ( $2^0$ )      |

**Note:** The actual divide code is  $N + 1$ , i.e., the number loaded plus 1.


## Typical Application

### Electronically Tuned Radio Controller System; Direct Drive LED

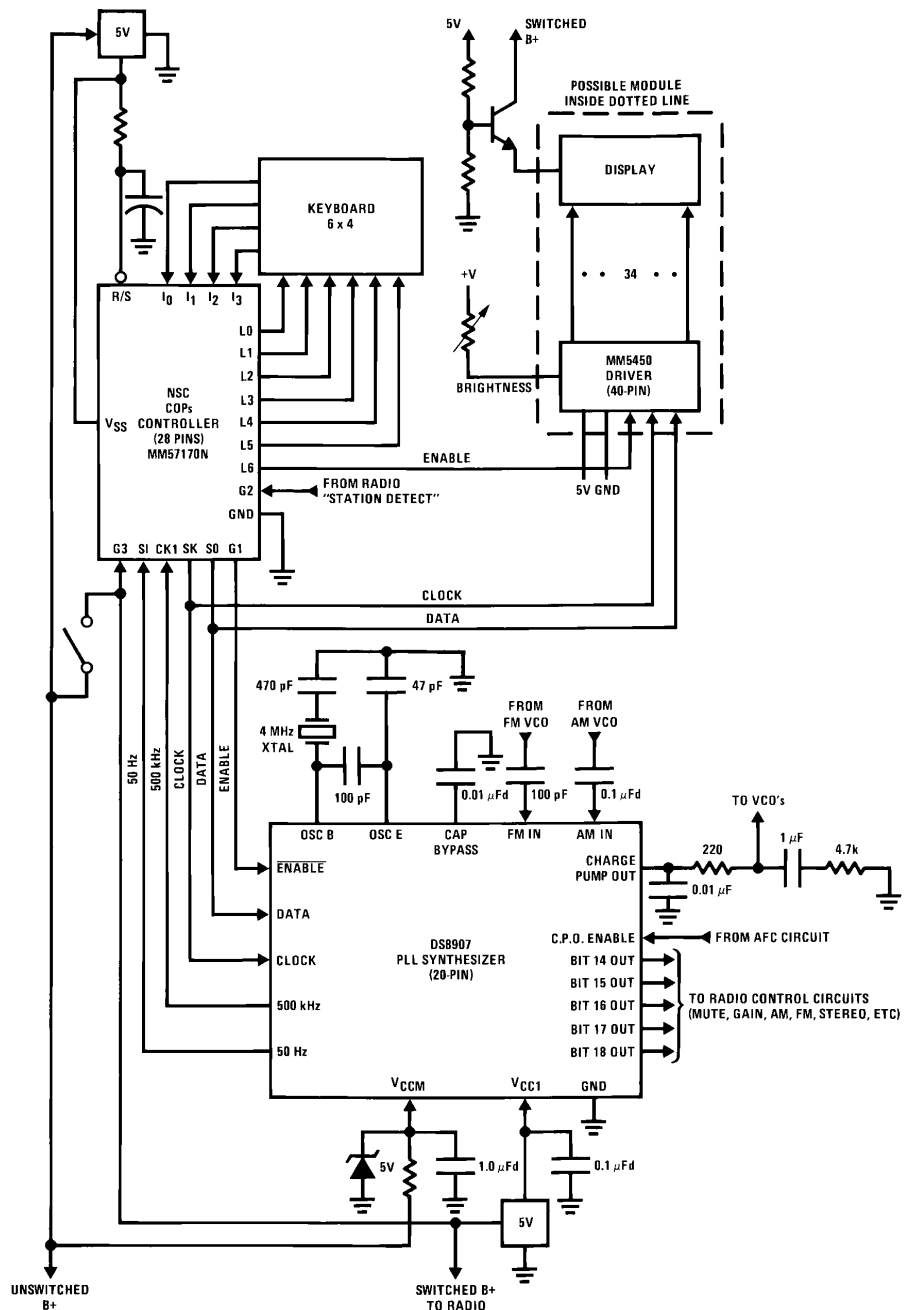

TL/F/7511-12


## Logic Diagram

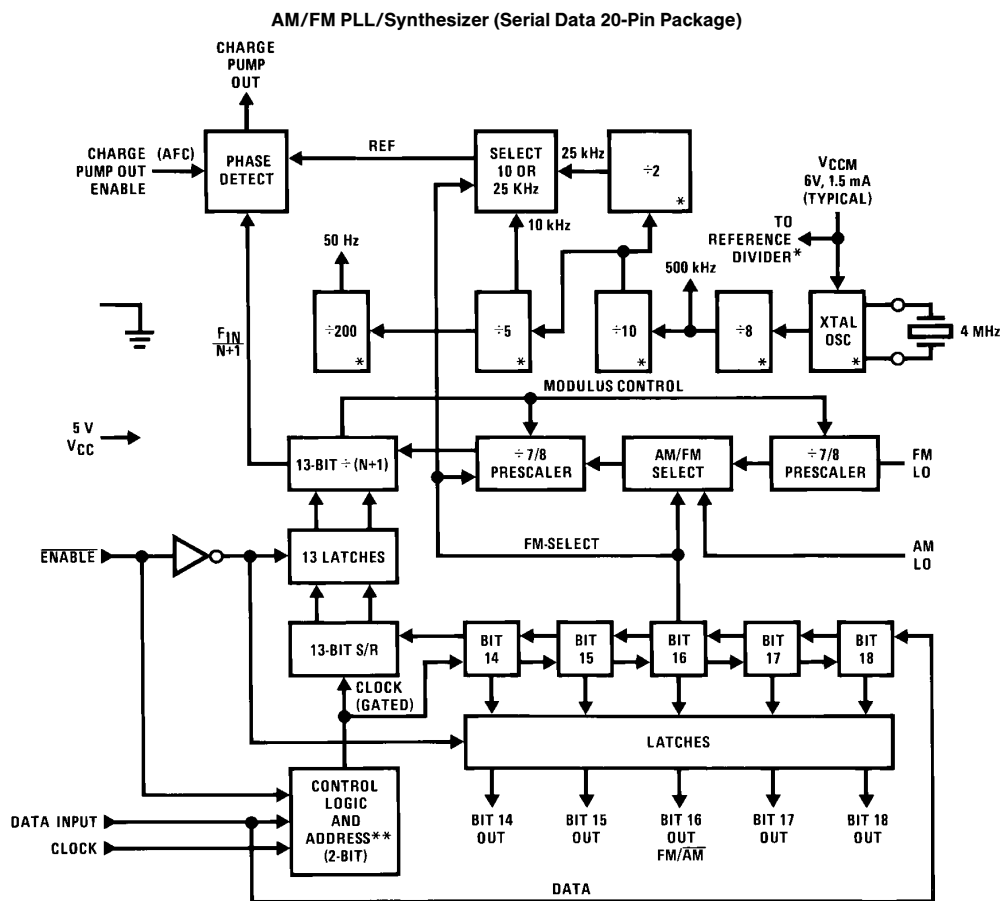


TL/F/7511-13

\*Sections operating from V<sub>CCM</sub> supply.

\*\*Address (1, 1)



## Physical Dimensions inches (millimeters)

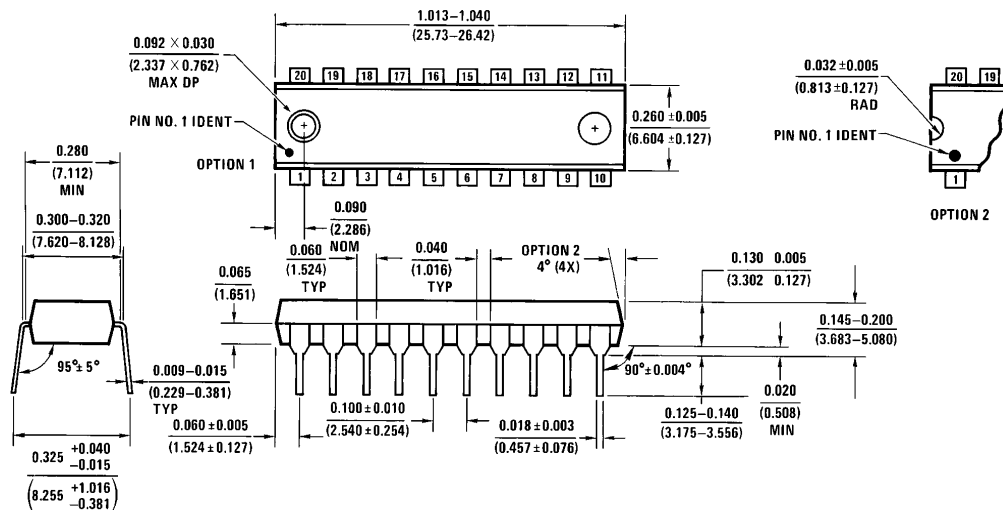

Molded Dual-In-Line Package (N)  
Order Number DS8907N  
NS Package Number N20A

N20A (REV G)

### LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
1111 West Bardin Road  
Arlington, TX 76017  
Tel: 1(800) 272-9959  
Fax: 1(800) 737-7018

**National Semiconductor Europe**  
Fax: (+49) 0-180-530 85 86  
Email: cnjwge@tevm2.nsc.com  
Deutsch Tel: (+49) 0-180-530 85 85  
English Tel: (+49) 0-180-532 78 32  
Français Tel: (+49) 0-180-532 93 58  
Italiano Tel: (+49) 0-180-534 16 80

**National Semiconductor Hong Kong Ltd.**  
13th Floor, Straight Block,  
Ocean Centre, 5 Canton Rd.  
Tsimshatsui, Kowloon  
Hong Kong  
Tel: (852) 2737-1600  
Fax: (852) 2736-9960

**National Semiconductor Japan Ltd.**  
Tel: 81-043-299-2309  
Fax: 81-043-299-2408