

DTC144VUA / DTC144VKA / DTC144VSA

Transistors


Digital transistor (built-in resistors)

DTC144VUA / DTC144VKA / DTC144VSA


●Features

- 1) Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors.
- 2) The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input, and parasitic effects are almost completely eliminated.
- 3) Only the on / off conditions need to be set for operation, making device design easy.
- 4) Higher mounting densities can be achieved.

●Equivalent circuit

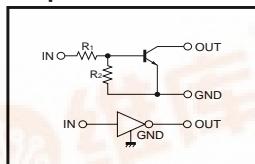

●External dimensions (Units : mm)

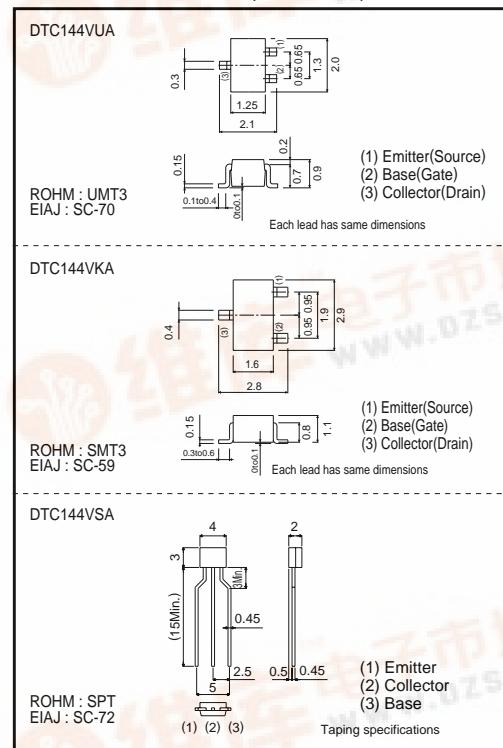●Absolute maximum ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Supply voltage	V _{cc}	50		50	V
Input voltage	V _i	-15~+40		-	V
Output current	I _o	30		30	mA
	I _c (Max.)	100			
Power dissipation	P _d	200		200	mW
DTC144VSA		300		300	mW
Junction temperature	T _j	150		150	°C
Storage temperature	T _{stg}	-55~+150		-55~+150	°C

●Packaging, marking and packaging specifications

Type	DTC144VUA	DTC144VKA	DTC144VSA
Package	UMT3	SMT3	SPT
Marking	166	E66	-
Packaging code	T106	T146	TP
Basic ordering unit (pieces)	3000	3000	5000

●Electrical characteristics ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Input voltage	V _(off)	-	-	1	V	V _{cc} =5V, I _o =100μA
	V _(on)	6	-	-		V _{cc} =0.3V, I _o =2mA
Output voltage	V _{O(on)}	-	0.1	0.3	V	I _o =10mA, V _i =0V
Input current	I _i	-	-	0.16	mA	V _i =5V
Output current	I _{o(off)}	-	-	0.5	μA	V _{cc} =50V, V _i =0V
DC current gain	G _f	33	-	-		I _o =5mA, V _o =5V
Input resistance	R _i	32.9	47	61.1	kΩ	-
Resistance ratio	R _{z/R_i}	0.17	0.21	0.26	-	-
Transition frequency	f _t	-	250	-	MHz	V _{cc} =10V, I _o =-5mA, f=100MHz

* Transition frequency of the device.