



ELECTRONICS, INC.
44 FARRAND STREET
BLOOMFIELD, NJ 07003
(973) 748-5089
<http://www.nteinc.com>

NTE335 & NTE336 Silicon NPN Transistor RF Power Output

Description:

The NTE335 and NTE336 are silicon NPN RF power transistors designed for power amplifier applications in industrial, commercial and amateur radio equipment to 30MHz.

Features:

- Specified 12.5V, 30MHz Characteristics:
Output Power = 80W
Minimum Gain = 12dB
Efficiency = 50%
- Available in Two Different Package Designs:
NTE335 (W52N, Flange Mount)
NTE336 (T93D, Stud Mount)

Absolute Maximum Ratings:

Collector-Emitter Voltage, V_{CEO}	25V
Collector-Base Voltage, V_{CBO}	45V
Emitter-Base Voltage, V_{EBO}	4V
Continuous Collector Current, I_C	20A
Total Device Dissipation ($T_C = +25^\circ\text{C}$), P_D	250W
Derate above 25°C	1.43W/ $^\circ\text{C}$
Storage Temperature Range, T_{stg}	-65° to $+150^\circ\text{C}$
Thermal Resistance, Junction-to-Case, R_{thJC}	0.7 $^\circ\text{C/W}$

Electrical Characteristics: ($T_C = +25^\circ\text{C}$ unless otherwise specified)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
OFF Characteristics						
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 100\text{mA}$, $I_B = 0$	18	—	—	V
	$V_{(BR)CES}$	$I_C = 50\text{mA}$, $V_{BE} = 0$	36	—	—	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 10\text{mA}$, $I_C = 0$	4	—	—	V



Electrical Characteristics (Cont'd): ($T_C = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
ON Characteristics						
DC Current Gain	h_{FE}	$I_C = 5\text{A}$, $V_{CE} = 5\text{V}$	10	–	150	
Dynamic Characteristics						
Output Capacitance	C_{ob}	$V_{CB} = 15\text{V}$, $I_E = 0$, $f = 1\text{MHz}$	–	–	250	pF
Functional Tests						
Common-Emitter Amplifier Power Gain	G_{pe}	$V_{CC} = 12.5\text{V}$, $P_{OUT} = 80\text{W}$, $f = 30\text{MHz}$	12	–	–	dB
Collector Efficiency	η		50	–	–	%
Series Equivalent Input Impedance	Z_{in}		–	$.938 - j.341$	–	Ω
Series Equivalent Output Impedance	Z_{out}		–	$1.16 - j.201$	–	Ω
Parallel Equivalent Input Impedance	–		–	1.06Ω 1817pF	–	
Parallel Equivalent Output Impedance	–		–	1.19Ω 777pF	–	

NTE335

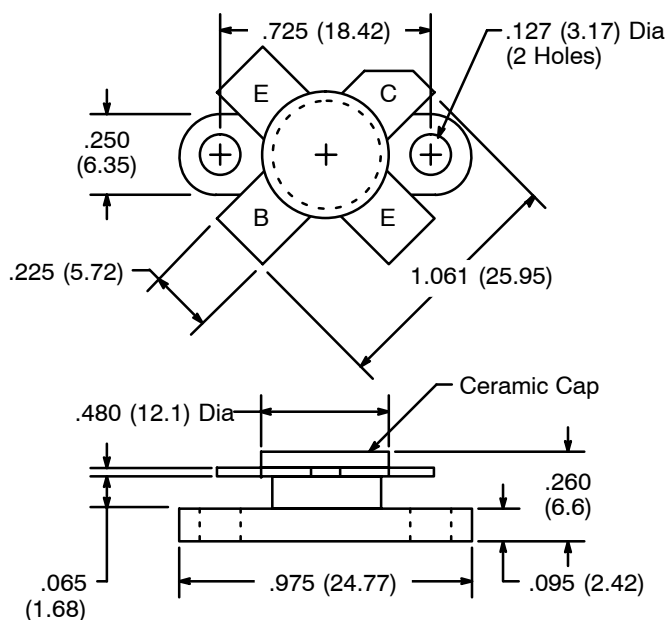

NTE336

