

SEMTECH**FAST RECOVERY
DOUBLER AND CENTER
TAPS****SCDA05F thru SCDA4F
SCNA05F thru SCNA4F
SCPA05F thru SCPA4F**

January 9, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:http://www.semtech.com

**FAST RECOVERY, MEDIUM CURRENT CENTER TAP
AND DOUBLER RECTIFIER ASSEMBLIES**


- Low forward voltage drop
- Low reverse leakage current
- Aluminum case
- Low thermal impedance
- Fast reverse recovery time

**QUICK REFERENCE
DATA**

- $V_R = 50V - 400V$
- $I_F = 15.0A$
- $I_R = 1.0 \mu A$
- $t_{rr} = 150nS$

ABSOLUTE MAXIMUM RATINGS

Device Type	Working Reverse Voltage V_{RWM}	Average Rectified Current						1 Cycle Surge Current $t_p = 8.3mS$		Repetitive Surge Current
		(@ case temperature)			(@ ambient temperature)			25°C	100°C	
		55°C	100°C	125°C	25°C	55°C	100°C			
		Volts	Amps	Amps	Amps	Amps	Amps			
SCDA05F	50	↑	↑	↑	↑	↑	↑	↑	↑	↑
SCDA1F	100	7.5	5.0	2.5	1.50	1.15	0.6	150	100	25
SCDA2F	200	↓	↓	↓	↓	↓	↓	↓	↓	↓
SCDA4F	400	↓	↓	↓	↓	↓	↓	↓	↓	↓
SCNA05F SCPA05F	50	↑	↑	↑	↑	↑	↑	↑	↑	↑
SCNA1F SCPA1F	100	15.0	10.0	5.0	3.00	2.30	1.2	150	100	25
SCNA2F SCPA2F	200	↓	↓	↓	↓	↓	↓	↓	↓	↓
SCNA4F SCPA4F	400	↓	↓	↓	↓	↓	↓	↓	↓	↓

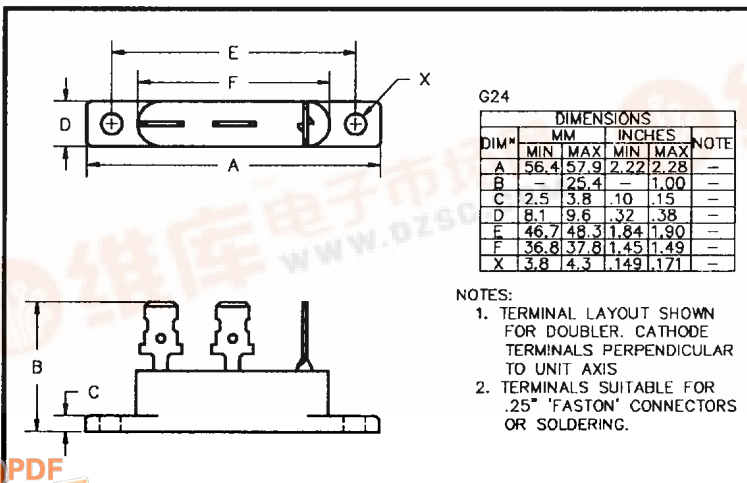MECHANICALMaximum thermal impedance
 $R_{\theta JC} = 4^{\circ}C/W$

January 9, 1998

ELECTRICAL CHARACTERISTICS (apply per leg)

Device Type	Reverse Current @ V_{RWM}		Maximum Forward Voltage V_F @ 3.0A @ 25°C	Maximum Reverse Recovery Time
	@ 25 °C	@ 100 °C		
	μA	μA	Volts	nS
SCDA05F SCDA1F SCDA2F SCDA4F	↑ 1.0 ↓	↑ 20 ↓	↑ 1.1 ↓	↑ 150 ↓
SCNA05F SCPA05F SCNA1F SCPA1F SCNA2F SCPA2F SCNA4F SCPA4F	↑ 1.0 ↓	↑ 20 ↓	↑ 1.1 ↓	

¹ Measured on discrete devices prior to assembly

Operating temperature range -55 °C to +150 °C
Storage temperature range -55 °C to +150 °C

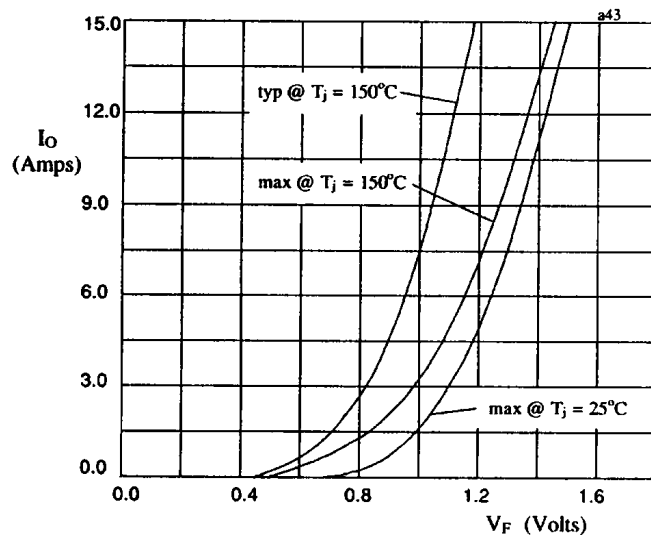


Fig 1. Forward voltage drop against current (per leg)

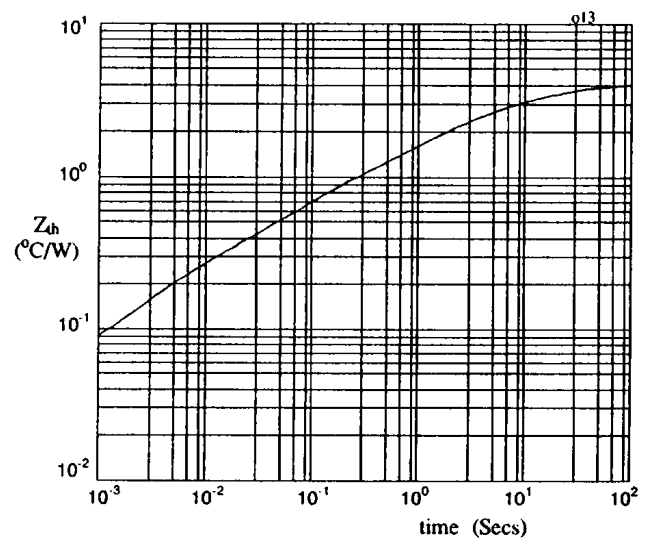


Fig 2. Transient thermal impedance characteristic per leg