


SBT1020 ... SBT10100

SBT1020 ... SBT10100

Schottky Barrier Rectifiers Schottky-Barrier-Gleichrichter

Version 2005-12-07

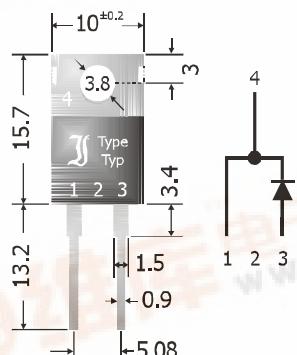

Dimensions - Maße [mm]

| | |
|---|------------|
| Nominal current Nennstrom | 10 A |
| Repetitive peak reverse voltage Periodische Spitzensperrspannung | 20...100 V |
| Plastic case Kunststoffgehäuse | TO-220AC |
| Weight approx. Gewicht ca. | 1.8 g |
| Plastic material has UL classification 94V-0 Gehäusematerial UL94V-0 klassifiziert | |
| Standard packaging taped in tubes Standard Lieferform in Stangen | |

Maximum ratings and Characteristics**Grenz- und Kennwerte**

| Type Typ | Repetitive peak reverse voltage Periodische Spitzensperrspannung V_{RRM} [V] | Surge peak reverse voltage Stoßspitzensperrspannung V_{RSM} [V] | Forward voltage Durchlass-Spannung V_F [V] ¹⁾ | |
|-------------|--|---|--|----------------------|
| | | | $I_F = 5 \text{ A}$ | $I_F = 10 \text{ A}$ |
| SBT1020 | 20 | 20 | < 0.47 | < 0.54 |
| SBT1030 | 30 | 30 | < 0.47 | < 0.54 |
| SBT1040 | 40 | 40 | < 0.47 | < 0.54 |
| SBT1045 | 45 | 45 | < 0.47 | < 0.54 |
| SBT1050 | 50 | 50 | < 0.57 | < 0.64 |
| SBT1060 | 60 | 60 | < 0.57 | < 0.64 |
| SBT1090 | 90 | 90 | < 0.72 | < 0.79 |
| SBT10100 | 100 | 100 | < 0.72 | < 0.79 |

Max. average forward rectified current, R-load
Dauergrenzstrom in Einwegschaltung mit R-Last

$T_c = 100^\circ\text{C}$ I_{FAV} 10 A

Repetitive peak forward current
Periodischer Spitzenstrom

$f > 15 \text{ Hz}$ I_{FRM} 30 A²⁾

Peak forward surge current, 50/60 Hz half sine-wave
Stoßstrom für eine 50/60 Hz Sinus-Halbwelle

SBT1020...
SBT1060 $T_A = 25^\circ\text{C}$ I_{FSM} 135/150 A

Peak forward surge current, 50/60 Hz half sine-wave
Stoßstrom für eine 50/60 Hz Sinus-Halbwelle

SBT1090...
SBT10100 $T_A = 25^\circ\text{C}$ I_{FSM} 115/125 A

Rating for fusing, $t < 10 \text{ ms}$
Grenzlastintegral, $t < 10 \text{ ms}$

$T_A = 25^\circ\text{C}$ i^2t 80 A²s

Junction temperature – Sperrschiichttemperatur
Storage temperature – Lagerungstemperatur

T_j T_s $-50...+150^\circ\text{C}$
 $-50...+175^\circ\text{C}$

1 PDF

Max. temperature of the case $T_c = 100^\circ\text{C}$ – Max. Temperatur des Gehäuses $T_c = 100^\circ\text{C}$

Characteristics

| | | | | Kennwerte |
|---|----------------------|---|------------------------------------|--------------------------------|
| Leakage current Sperrstrom | SBT1020 ... SBT1040 | $T_j = 25^\circ\text{C}$ $T_j = 100^\circ\text{C}$ | $V_R = V_{RRM}$ $V_R = V_{RRM}$ | I_R I_R |
| Leakage current Sperrstrom | SBT1045 ... SBT10100 | $T_j = 25^\circ\text{C}$ $T_j = 100^\circ\text{C}$ | $V_R = V_{RRM}$ $V_R = V_{RRM}$ | I_R I_R |
| Thermal resistance junction to case Wärmewiderstand Sperrsicht – Gehäuse | | | | R_{thC} $< 3 \text{ K/W}$ |

