


SIEMENS

BFS 17P

NPN Silicon RF Transistor

- For broadband amplifiers up to 1GHz at collector currents from 1mA to 20mA
- CECC-type available: CECC 50002/248.

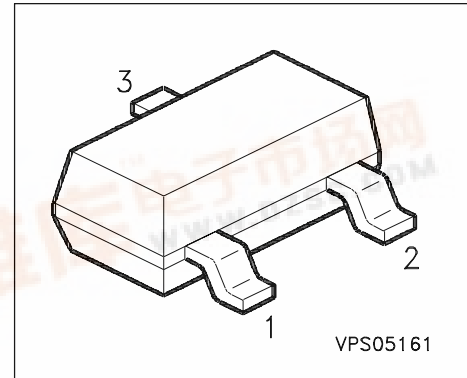

Type	Marking	Ordering Code	Pin Configuration			Package
BFS 17P	MCs	Q62702-F940	1 = B	2 = E	3 = C	SOT-23

Maximum Ratings of any single Transistor

Parameter	Symbol	Values	Unit
Collector-emitter voltage	V_{CEO}	15	V
Collector-base voltage	V_{CBO}	25	
Emitter-base voltage	V_{EBO}	2.5	
Collector current	I_C	25	mA
Peak collector current $f \geq 10$ MHz	I_{CM}	50	
Total power dissipation $T_S \leq 55$ °C	P_{tot}	280	mW
Junction temperature	T_j	150	°C
Ambient temperature	T_A	- 65 + 150	
Storage temperature	T_{stg}	- 65 ... + 150	

Thermal Resistance

Junction - soldering point ¹⁾	R_{thJS}	≤ 340	K/W
--	------------	------------	-----

1) Package mounted on alumina 15 mm x 16,7 mm x 0,7 mm

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics of any single Transistor					
Collector-emitter breakdown voltage $I_C = 1\text{ mA}$, $I_B = 0$	$V_{(BR)CEO}$	15	-	-	V
Collector-base cutoff current $V_{CB} = 10\text{ V}$, $I_E = 0$ $V_{CB} = 25\text{ V}$, $I_E = 0$	I_{CBO}	- -	- -	0.05 10	μA
Emitter-base cutoff current $V_{EB} = 2.5\text{ V}$, $I_C = 0$	I_{EBO}	-	-	100	
DC current gain $I_C = 2\text{ mA}$, $V_{CE} = 1\text{ V}$ $I_C = 25\text{ mA}$, $V_{CE} = 1\text{ V}$	h_{FE}	20 20	- 70	150 -	-
Collector-emitter saturation voltage $I_C = 10\text{ mA}$, $I_B = 1\text{ mA}$	V_{CEsat}	-	0.1	0.4	V

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics of any single Transistor					
Transition frequency $I_C = 2\text{ mA}$, $V_{CE} = 5\text{ V}$, $f = 200\text{ MHz}$ $I_C = 25\text{ mA}$, $V_{CE} = 5\text{ V}$, $f = 200\text{ MHz}$	f_T	1 1.3	1.4 2.5	- -	GHz
Collector-base capacitance $V_{CB} = 5\text{ V}$, $V_{BE} = v_{be} = 0$, $f = 1\text{ MHz}$	C_{cb}	-	0.55	0.8	pF
Collector-emitter capacitance $V_{CE} = 5\text{ V}$, $V_{BE} = v_{be} = 0$, $f = 1\text{ MHz}$	C_{ce}	-	0.25	-	
Input capacitance $V_{EB} = 0.5\text{ V}$, $I_C = 0$, $f = 1\text{ MHz}$	C_{ibo}	-	1.45	-	
Output capacitance $V_{CE} = 5\text{ V}$, $V_{BE} = v_{be} = 0$, $f = 1\text{ MHz}$	C_{obs}	-	-	1.5	
Noise figure $I_C = 2\text{ mA}$, $V_{CE} = 5\text{ V}$, $f = 800\text{ MHz}$ $Z_S = 0\text{ }\Omega$	F	-	3.5	5	dB
Transducer gain $I_C = 20\text{ mA}$, $V_{CE} = 5\text{ V}$, $f = 500\text{ MHz}$ $Z_S = Z_L = 50\text{ }\Omega$	$ S_{21e} ^2$	-	12.7	-	
Linear output voltage $I_C = 14\text{ mA}$, $V_{CE} = 5\text{ V}$, $d_{im} = 60\text{ dB}$ $f_1 = 806\text{ MHz}$, $f_2 = 810\text{ MHz}$, $Z_S = Z_L = 50\text{ }\Omega$	$V_{01} = V_{02}$	-	100	-	mV
Third order intercept point $I_C = 14\text{ mA}$, $V_{CE} = 5\text{ V}$, $f = 800\text{ MHz}$ $Z_S = Z_{Sopt}$, $Z_L = Z_{Lopt}$	IP_3	-	23	-	dBm

Total power dissipation $P_{\text{tot}} = f(T_A^*, T_S)$


* Package mounted on epoxy

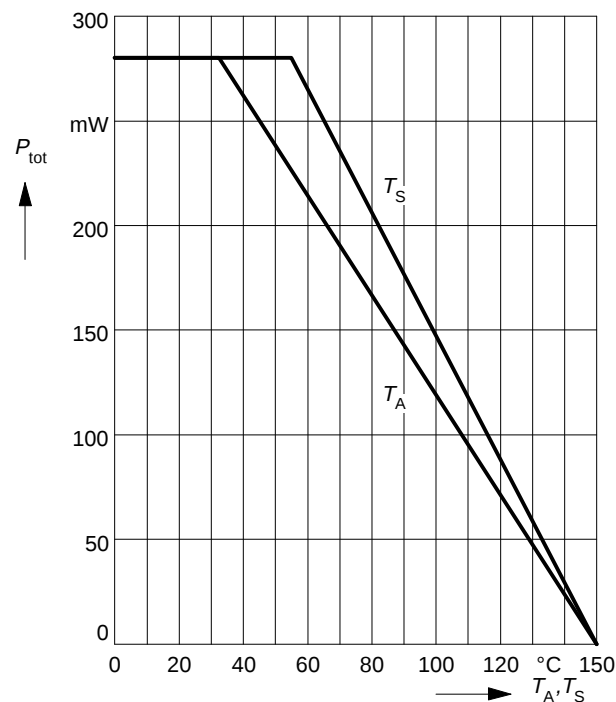


Permissible Pulse Load $R_{\text{thJS}} = f(t_p)$

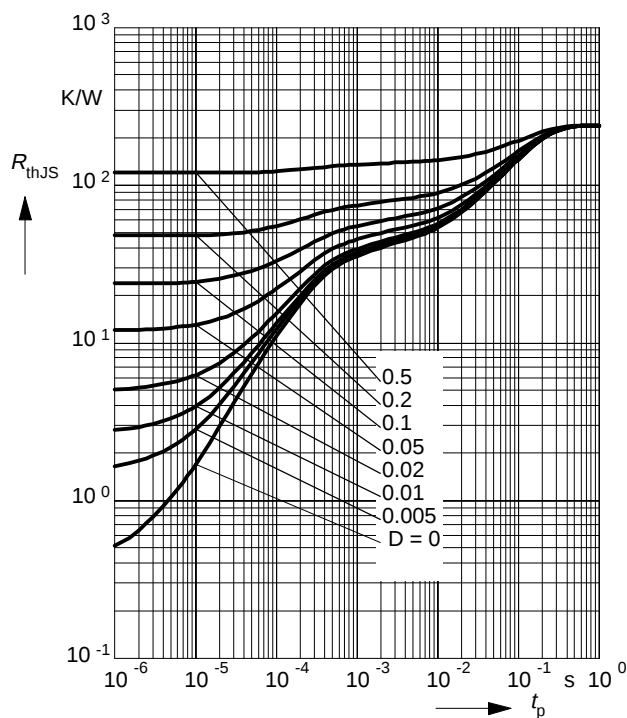


Permissible Pulse Load $P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$

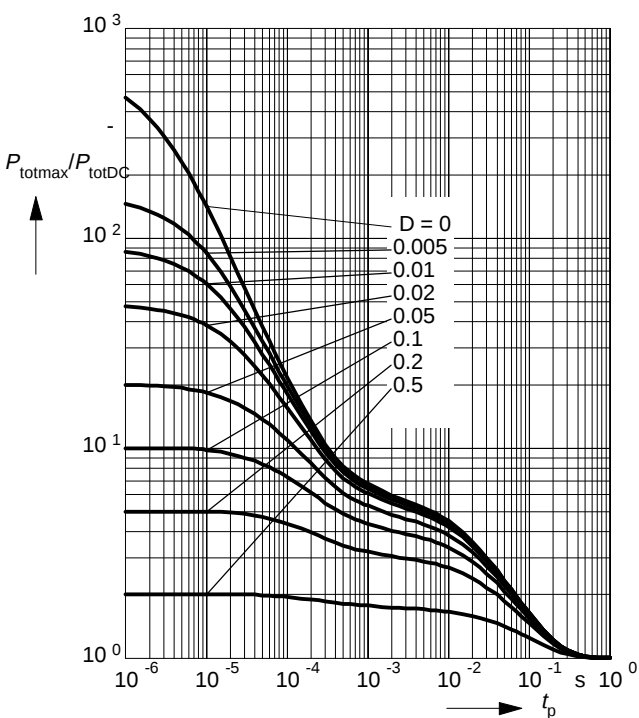

Collector-base capacitance $C_{cb} = f(V_{CB})$
 $V_{BE} = v_{be} = 0, f = 1\text{MHz}$

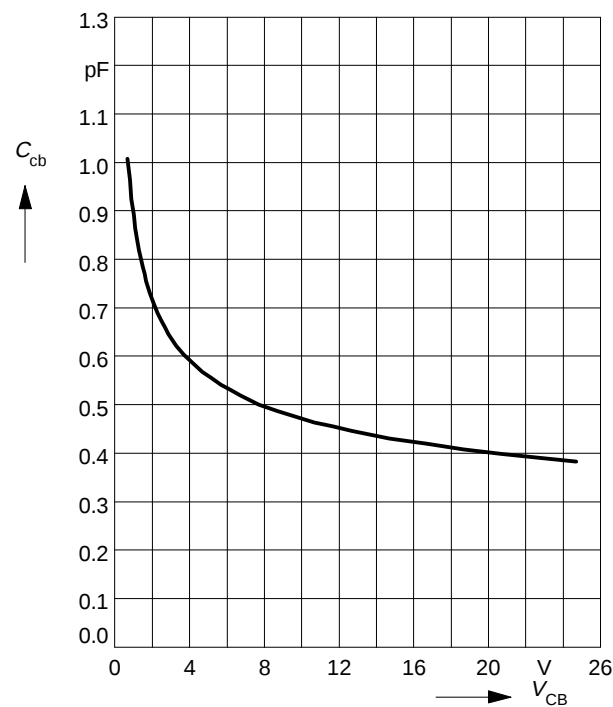

Transition frequency $f_T = f(I_C)$
 $f = 500\text{MHz}$
 $V_{CE} = \text{Parameter}$

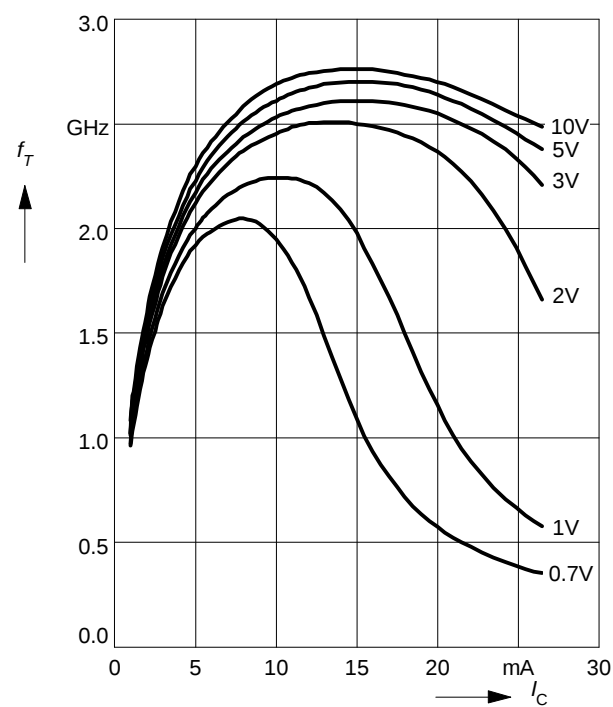

Package

