

## RF COILS < Pin Type: S-5 Series>

## Type: S-5LD3

# ◆ Product Description


- 5.9 $\times$ 5.9mm Max.(L $\times$ W), 6.1mm Max. Height.
- Inductance: 0.1~30µH Max.
- · Operating frequency: 300MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements.



#### ◆ Feature


- Variable shielded type.
- RoHS Compliance.

## Dimensions (mm)

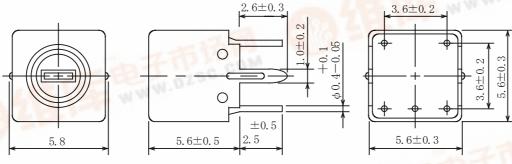

- \* Dimension does not include solder used on coil.
- \* Pin pitch should be measured at the root of terminal.
- \* Dimensions without tolerance are approx.

## ◆ Connection (Bottom View)



"S" is winding start.

## ◆Specification (Part No. 2259-T505)

Item	(1-3)	Measuring Condition
Tuning capacity	85.0pF±3% Variable	10MHz
Unloaded Qu	22 (Typ)	10MHz

