



**RF COILS < Pin Type: S-10 Series >**

**Type: S-10E**


◆ **Product Description**

- 11.0×10.7mm Max.(L×W), 13.0mm Max. Height.
- Inductance:30μH Max.
- Operating frequency: 300MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements.

**Feature**


- Variable shielded type.
- Internally assembled condenser is available.
- RoHS Compliance

◆ **Dimensions (mm)**

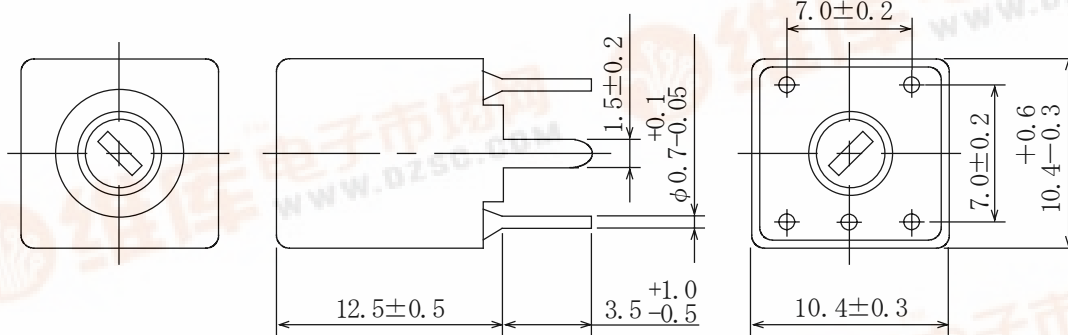

- \* Dimension does not include solder used on coil.
- \* Pin pitch should be measured at the root of terminal.

◆ **Connection (Bottom View)**



“S” is winding start

◆ **Specification** (Part No.0215-T017)

Item	(1-3)	Measuring Conditions
Tuning frequency	24MHz±3% Variable	
Unloaded Qu	50Min.	24MHz
Capacitor (Int.)	56pF±10%	
Ext. stray capacitor 6 pF between (1-3) at measuring.		

