




The RT0104 is a CMOS Design for single tone alarm sound application

Features

- Low Operating Voltage 3V ~ 5V
- CMOS process
- On-Chip RC oscillator
- Low stand by current

Pin Diagram

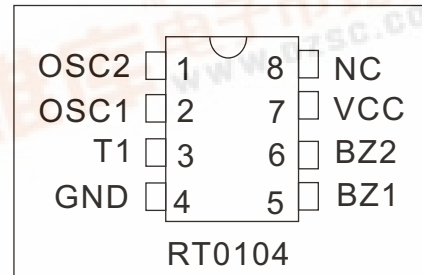

Pin Description

Symbol	Description	Pin	I / O
OSC2	Oscillator pin	1	I
OSC1	Oscillator pin	2	O
T1	Test Pin	3	O
GND	Ground	4	
BZ1	Audio output	5	O
BZ2	Audio output	6	O
VCC	Power	7	
NC	No connecting	8	

Electrical Characteristics

Vcc=3V , Temp=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit
Operating Voltage	Vcc	3.0	4.0	5.0	V
Stand-By Current	I _{sb}		50	60	uA
Operating Current	I _{op}		300	500	uA
BZ1, BZ2	I _{oh}	1.0			mA
Driving Current	I _{ol}	1.0			mA
Operating Frequency	F _{op}		128		KHz

Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
V _{cc}	Supply Voltage	-0.3 ~ 6	V
V _i	Input Voltage	-0.3 ~ V _{cc} + 0.3	V
V _o	Output Voltage	-0.3 ~ V _{cc} + 0.3	V
T _{st}	Storage Temperature	-40 ~ 125	°C
T _{tp}	Operating Temperature	0 ~ 65	°C

