

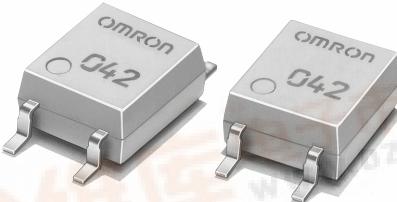


## MOS FET Relays

**G3VM-21GR1**

### New MOS FET Relay with Low Output Capacitance and ON Resistance ( $C \times R = 5\text{pF} \cdot \Omega$ ) in a 20-V Load Voltage Model

- ON resistance of  $1\ \Omega$  (typical) suppresses output signal attenuation.
- Leakage current of  $1.0\text{nA}$  max. when output relay is open.

**NEW**

### ■ Application Examples

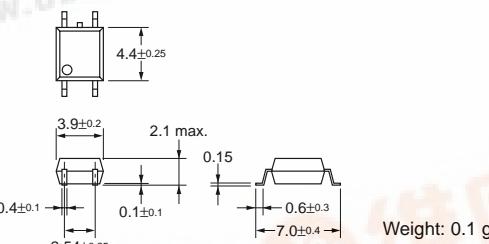
- Semiconductor inspection tools
- Measurement devices
- Broadband systems
- Data loggers

### ■ List of Models

Contact form	Terminals	Load voltage (peak value)	Model	Number per stick	Number per tape
SPST-NO	Surface-mounting terminals	20 VAC	G3VM-21GR1	100	
			G3VM-21GR1(TR)	---	2,500


### ■ Dimensions

**Note:** All units are in millimeters unless otherwise indicated.


**G3VM-21GR1**

**Note:** The actual product is marked differently from the image shown here.

### ■ Terminal Arrangement/Internal Connections (Top View)

**G3VM-21GR1**

### ■ Actual Mounting Pad Dimensions (Recommended Value, Top View)

**G3VM-21GR1**

## ■ Absolute Maximum Ratings (Ta = 25°C)

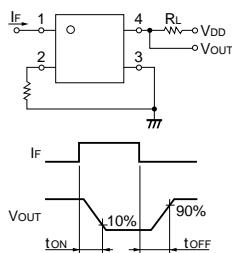
Item	Symbol	Rating	Unit	Measurement Conditions
Input	LED forward current	I <sub>F</sub>	50	mA
	Repetitive peak LED forward current	I <sub>FP</sub>	1	A
	LED forward current reduction rate	Δ I <sub>F</sub> /°C	-0.5	mA/°C
	LED reverse voltage	V <sub>R</sub>	5	V
	Connection temperature	T <sub>j</sub>	125	°C
Output	Output dielectric strength	V <sub>OFF</sub>	20	V
	Continuous load current	I <sub>O</sub>	300	mA
	ON current reduction rate	Δ I <sub>ON</sub> /°C	-3.0	mA/°C
	Connection temperature	T <sub>j</sub>	125	°C
	Dielectric strength between input and output (See note 1.)	V <sub>I-O</sub>	1,500	Vrms
	Operating temperature	T <sub>a</sub>	-20 to +85	°C
	Storage temperature	T <sub>stg</sub>	-55 to +125	°C
Soldering temperature (10 s)		---	260	°C
				10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

## ■ Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	V <sub>F</sub>	1.0	1.15	1.3	V I <sub>F</sub> = 10 mA
	Reverse current	I <sub>R</sub>	---	---	10	μA V <sub>R</sub> = 5 V
	Capacity between terminals	C <sub>T</sub>	---	15	---	pF V = 0, f = 1 MHz
	Trigger LED forward current	I <sub>FT</sub>	---	---	4	mA I <sub>O</sub> = 100 mA
Output	Maximum resistance with output ON	R <sub>ON</sub>	---	1	1.5	Ω I <sub>F</sub> = 5 mA, I <sub>O</sub> = 300 mA, t < 1 s
	Current leakage when the relay is open	I <sub>LEAK</sub>	---	---	1.0	nA V <sub>OFF</sub> = 20 V Ta = 50°C
	Capacity between terminals	C <sub>OFF</sub>	---	5.0	12.0	pF V = 0, f = 100 MHz, t < 1 s
Capacity between I/O terminals		C <sub>I-O</sub>	---	0.8	---	pF f = 1 MHz, Vs = 0 V
Insulation resistance		R <sub>I-O</sub>	1,000	---	---	MΩ V <sub>I-O</sub> = 500 VDC, RoH ≤ 60%
Turn-ON time	t <sub>ON</sub>	---	---	0.5	ms	I <sub>F</sub> = 10 mA, R <sub>L</sub> = 200 Ω, V <sub>DD</sub> = 20 V (See note 2.)
Turn-OFF time	t <sub>OFF</sub>	---	---	0.5	ms	

Note: 2. Turn-ON and Turn-OFF Times



## ■ Recommended Operating Conditions

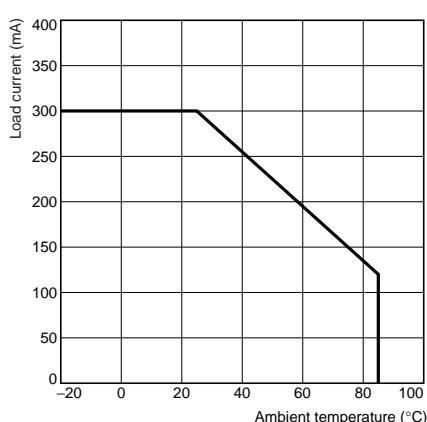
Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Output dielectric strength	V <sub>DD</sub>	---	---	20	V
Operating LED forward current	I <sub>F</sub>	7	---	30	mA
Continuous load current	I <sub>O</sub>	---	---	300	mA
Operating temperature	T <sub>a</sub>	25	---	60	°C

## ■ Engineering Data

### Load Current vs. Ambient Temperature

G3VM-21GR1



## ■ Safety Precautions

Refer to page 6 for precautions common to all G3VM models.