



MOS FET Relays

G3VM-61B1/E1

Analog-switching MOS FET Relay for High Switching Currents, with Dielectric Strength of 2.5 kVAC between I/O.

- Upgraded G3VM-61 B/E Series.
- Switches minute analog signals.
- Leakage current of 1 μ A max. when output relay is open.

■ Application Examples

- Measurement devices
- Security systems
- Amusement machines


■ List of Models

Contact form	Terminals	Load voltage (peak value)	Model	Number per stick	Number per tape
SPST-NO	PCB terminals	60 VAC	G3VM-61B1	50	---
	Surface-mounting terminals		G3VM-61E1	---	---
			G3VM-61E1(TR)	---	1,500


■ Dimensions

Note: All units are in millimeters unless otherwise indicated.

G3VM-61B1

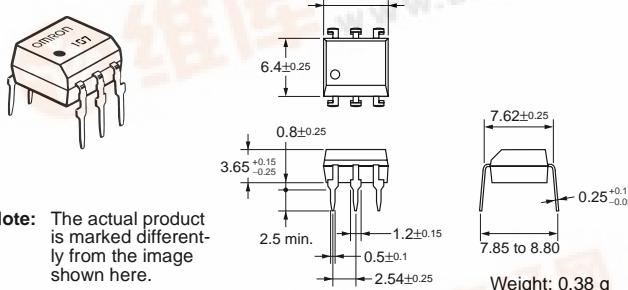


G3VM-61E1

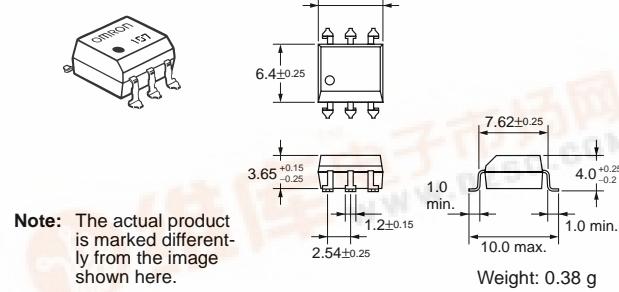


■ Terminal Arrangement/Internal Connections (Top View)

G3VM-61B1




G3VM-61E1




■ PCB Dimensions (Bottom View)

G3VM-61B1



■ Actual Mounting Pad Dimensions (Recommended Value, Top View)

G3VM-61E1




■ Absolute Maximum Ratings (Ta = 25°C)

Item		Symbol	Rating	Unit	Measurement Conditions
Input	LED forward current	I _F	50	mA	
	Repetitive peak LED forward current	I _{FP}	1	A	100 µs pulses, 100 pps
	LED forward current reduction rate	Δ I _F /°C	-0.5	mA/°C	Ta ≥ 25°C
	LED reverse voltage	V _R	5	V	
	Connection temperature	T _j	125	°C	
Output	Output dielectric strength	V _{OFF}	60	V	
	Continuous load current	I _O	500	mA	
			500		
			1,000		
	ON current reduction rate	Δ I _{ON} /°C	-0.5	mA/°C	Ta ≥ 25°C
			-0.5		
			-10.0		
	Connection temperature	T _j	125	°C	
	Dielectric strength between input and output (See note 1.)	V _{I-O}	2,500	Vrms	AC for 1 min
Operating temperature		T _a	-40 to +85	°C	With no icing or condensation
Storage temperature		T _{stg}	-55 to +125	°C	With no icing or condensation
Soldering temperature (10 s)		---	260	°C	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Connection Diagram

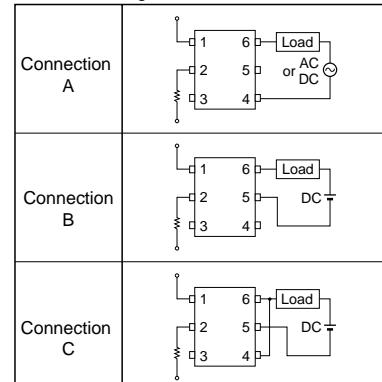

■ Electrical Characteristics (Ta = 25°C)

Item		Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	V _F	1.0	1.15	1.3	V	I _F = 10 mA
	Reverse current	I _R	---	---	10	µA	V _R = 5 V
	Capacity between terminals	C _T	---	30	---	pF	V = 0, f = 1 MHz
	Trigger LED forward current	I _{FT}	---	1.6	3	mA	I _O = 500 mA
Output	Maximum resistance with output ON	R _{ON}	---	1	2	Ω	I _F = 5 mA, I _O = 500 mA
			---	0.5	1	Ω	I _F = 5 mA, I _O = 500 mA
			---	0.25	---	Ω	I _F = 5 mA, I _O = 1,000 mA
	Current leakage when the relay is open	I _{LEAK}	---	---	1.0	µA	V _{OFF} = 60 V
Capacity between I/O terminals		C _{I-O}	---	0.8	---	pF	f = 1 MHz, Vs = 0 V
Insulation resistance		R _{I-O}	1,000	---	---	MΩ	V _{I-O} = 500 VDC, RoH ≤ 60%
Turn-ON time		t _{ON}	---	0.8	2.0	ms	I _F = 5 mA, R _L = 200 Ω, V _{DD} = 20 V (See note 2.)
Turn-OFF time		t _{OFF}	---	0.1	0.5	ms	

■ Recommended Operating Conditions


Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Output dielectric strength	V _{DD}	---	---	48	V
Operating LED forward current	I _F	5	7.5	25	mA
Continuous load current	I _O	---	---	500	mA
Operating temperature	T _a	-20	---	65	°C

■ Engineering Data

Load Current vs. Ambient Temperature

G3VM-61B1(E1)

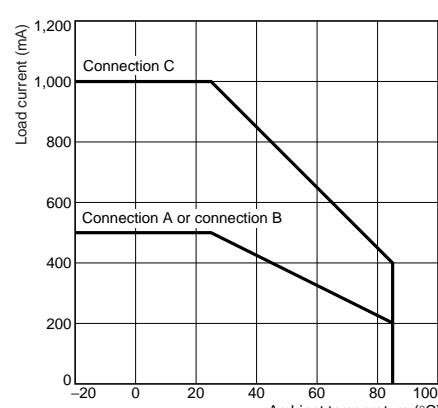

■ Safety Precautions

Refer to page 6 for precautions common to all G3VM models.

Note: 2. Turn-ON and Turn-OFF Times

