


FEATURES

- 20 ns switching time (toggle)
- make-before-break switching
- 100 MHz at ±0.1dB, bandwidth (flattened)
- typically 0.04 dB insertion loss at 1 MHz
- typically 0.03 % differential gain at 3.58 MHz
- typically 0.01 degree differential phase at 3.58 MHz

FUNCTIONAL BLOCK DIAGRAM

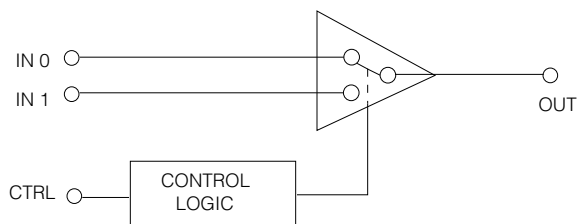

ABSOLUTE MAXIMUM RATINGS

| PARAMETER | VALUE |
|--------------------------------------|------------------------------------|
| Supply Voltage | ±6.0 V |
| Operating Temperature Range | 0°C to 70° C |
| Storage Temperature Range | -65°C to 150° C |
| Lead Temperature (Soldering, 10 Sec) | 260° C |
| Analog Input Voltage (IN 0, IN 1) | $V_{EE} < V_{IN} < V_{CC} + 0.3 V$ |
| Control Input Voltage Range | $-5 V < V_{CTRL} < V_{CC} + 0.3 V$ |

ORDERING INFORMATION

| Part Number | Package Type | Temperature Range |
|-------------|--------------|-------------------|
| GY4102ACDA | 8 pin PDIP | 0 - 70°C |
| GY4102ACKA | 8 pin SOIC | 0 - 70°C |

CIRCUIT DESCRIPTION


The GY4102A is a bipolar, monolithic SPDT video switch incorporating fast control logic. The analog signal path is characterised by low differential gain, low differential phase and low insertion loss, coupled with a ±0.1 dB bandwidth of typically 100 MHz into a 10 pF load, using an external series resistor.

In demanding video applications the GY4102A features a typical switching glitch of less than 30 mV over a 3 ns period. The device offers toggle rates up to 50 MHz. The control input is TTL and 5 V CMOS compatible.

APPLICATIONS

- Sub-pixel video switching
- Fast data sampling
- Modulation
- Special Effects video switching

PIN CONNECTIONS

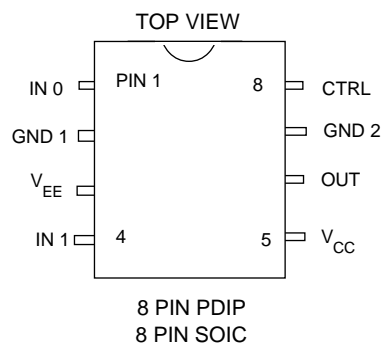

TRUTH TABLE

| CTRL | OUTPUT |
|------|--------|
| 0 | IN 0 |
| 1 | IN 1 |

AVAILABLE PACKAGING

- 8 pin PDIP
- 8 pin SOIC

ELECTRICAL CHARACTERISTICS ($V_S = \pm 5V$ DC, $T_A = 0 - 70^\circ C$, $C_L = 10pF$, $R_L = 10 k\Omega$ unless otherwise shown)

| | PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|-----------|---------------------------|-------------------|---------------------------------------|------|-----------|------------|------------------|
| DC SUPPLY | Supply Voltage | $\pm V_S$ | | 4.5 | 5 | 5.5 | V |
| | Supply Current | I+ | | - | 23 | 30 | mA |
| | | I- | | | - | 25 | 32 |
| LOGIC | Control Input Bias | I_{CTRL} | Control = 1 | - | 5 | 25 | μA |
| | Logic Level threshold | V_{LOGIC} | 1 | 2 | - | - | V |
| | | | 0 | - | - | 0.8 | V |
| STATIC | Analog Input Bias Current | I_{BIAS} | Selected channel | - | 12 | 30 | μA |
| | Deselected channel | | - | 26 | 60 | μA | |
| | Signal Voltage Swing | V_{SIG} | Extremes before clipping occurs | -1.5 | - | +3 | V |
| | Output Offset Voltage | V_{OS} | $T_A = 25^\circ C$ | -6 | +4 | +14 | mV |
| | Output Offset Voltage | $V_{OSCH-CH}$ | $T_A = 25^\circ C$ channel to channel | - | 1 | 5 | mV |
| | Output Offset Drift | $\Delta V_{OS}/T$ | | - | +93 | +200 | $\mu V/^\circ C$ |
| DYNAMIC | Input Resistance | R_{IN} | Channel On | 500 | - | - | $k\Omega$ |
| | Input Capacitance | C_{IN} | Channel On | 1.3 | - | - | pF |
| | Frequency Response | | DC - 100 MHz $R_S = 33 \Omega$ | - | ± 0.2 | - | dB |
| | Flatness | | DC - 8 MHz $R_S = 33 \Omega$ | - | - | ± 0.01 | dB |
| | Insertion Loss | I.L. | $f = 1$ MHz | - | 0.04 | - | dB |
| | Differential Gain | dg | $f =$ colorburst 3.58 or 4.43 MHz | - | 0.03 | - | % |
| | Differential Phase | dp | $f =$ colorburst 3.58 or 4.43 MHz | - | 0.01 | - | degrees |
| | Crosstalk (all hostile) | $XTALK_{AH}$ | $f = 10$ MHz see fig. 3 | 75 | 80 | - | dB |
| | Slew Rate | +SR | $V_{IN} = 2$ Vp-p $T_A = 25^\circ C$ | 400 | 620 | - | V/ μs |
| -SR | | 250 | | 330 | - | V/ μs | |

SWITCHING CHARACTERISTICS ($V_S = \pm 5V$, $T_A = 0 - 70^\circ C$, $C_L = 10pF$, $R_S = 33 \Omega$, $R_L = 10 k\Omega$)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS | |
|---------------------------------------|---------------|--|-----------|------|-----|-------|----|
| Delay Time (see Figure 7) | $t_{d(on1)}$ | $V_{SIG} = 0 - 1$ V | - | 5.4 | 9 | ns | |
| | $t_{d(on2)}$ | | - | 8.2 | 13 | ns | |
| | $t_{d(off1)}$ | $V_{SIG} = 1 - 0$ V | - | 6 | 11 | ns | |
| | $t_{d(off2)}$ | | - | 12.5 | 22 | ns | |
| Settling Time (see Figure 7a) | $t_{S(on)}$ | To 0.5 IRE on 0 to 1 V output, $T_A = 25^\circ$ | - | 9 | 15 | ns | |
| (see Figure 7b) | $t_{S(off)}$ | To 0.5 IRE on 1 to 0 V output, $T_A = 25^\circ C$ | - | 7 | 15 | ns | |
| Switching Transient * (Unfiltered) | | POS. | Amplitude | - | +30 | +50 | mV |
| | | | Duration | - | 3 | 5 | ns |
| | | NEG. | Amplitude | - | -20 | -30 | mV |
| | | | Duration | - | 2 | 3 | ns |

* CH0 = CH1 = GND

TYPICAL PERFORMANCE CURVES FOR GY4102A

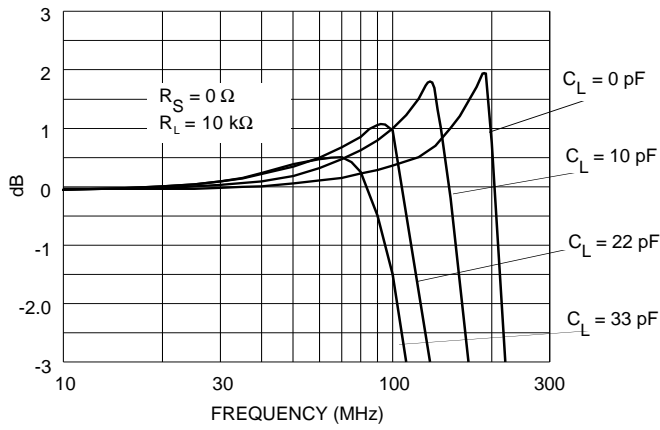


Fig. 1 GY4102A Frequency Response

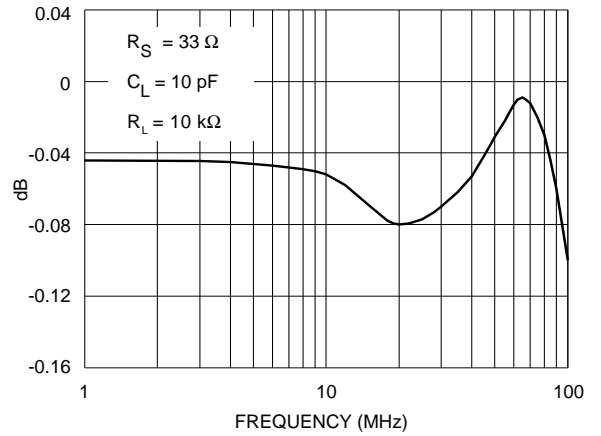


Fig. 2 GY4102A Flattened Frequency Response

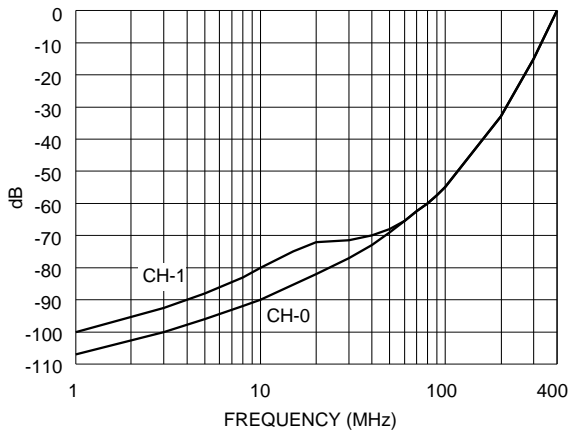


Fig. 3 GY4102A Crosstalk vs Frequency


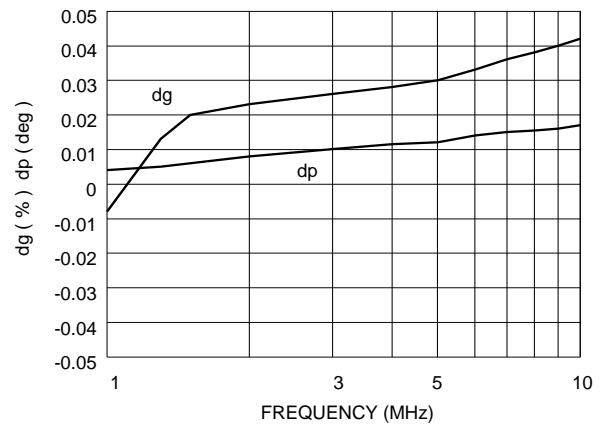


Fig. 4 GY4102A Differential Gain & Phase


An evaluation board and application note on the GY4102A is available.
 Please quote EB4102 for the board and AN 520 - 2 for the application note.
 There is no charge for these items.

GY4102A TEST CIRCUITS

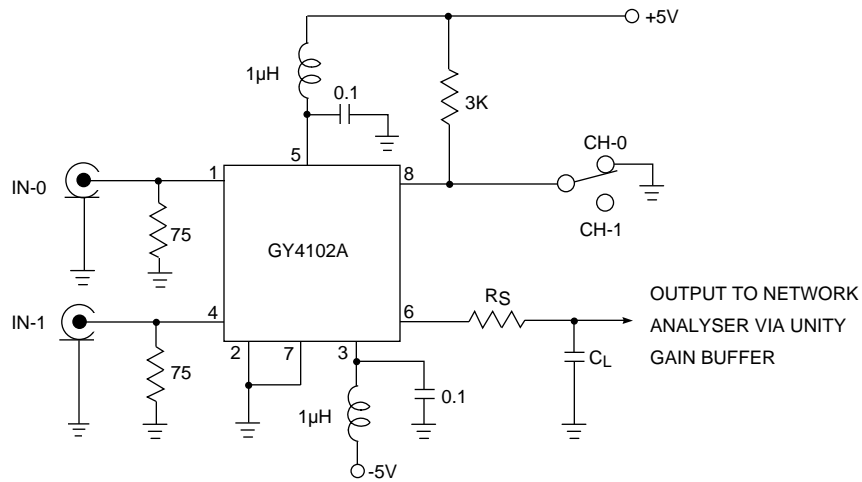

All resistors in ohms, all capacitors in microfarads unless otherwise stated

Fig. 5 Frequency Response

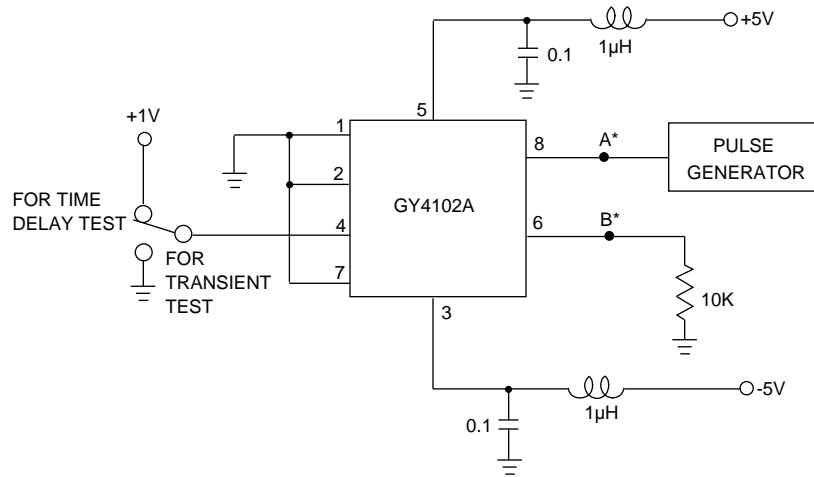

*USE ULTRA LOW CAPACITANCE SCOPE PROBES AT POINTS A & B

PULSE GENERATOR CHARACTERISTICS $t_r = t_f \leq 1 \text{ ns}$ $V_o = 5 \text{ V}$ $p_{rr} \leq 20 \text{ MHz}$

All resistors in ohms, all capacitors in microfarads unless otherwise stated

Fig. 6 Switching Transient / Time Delays

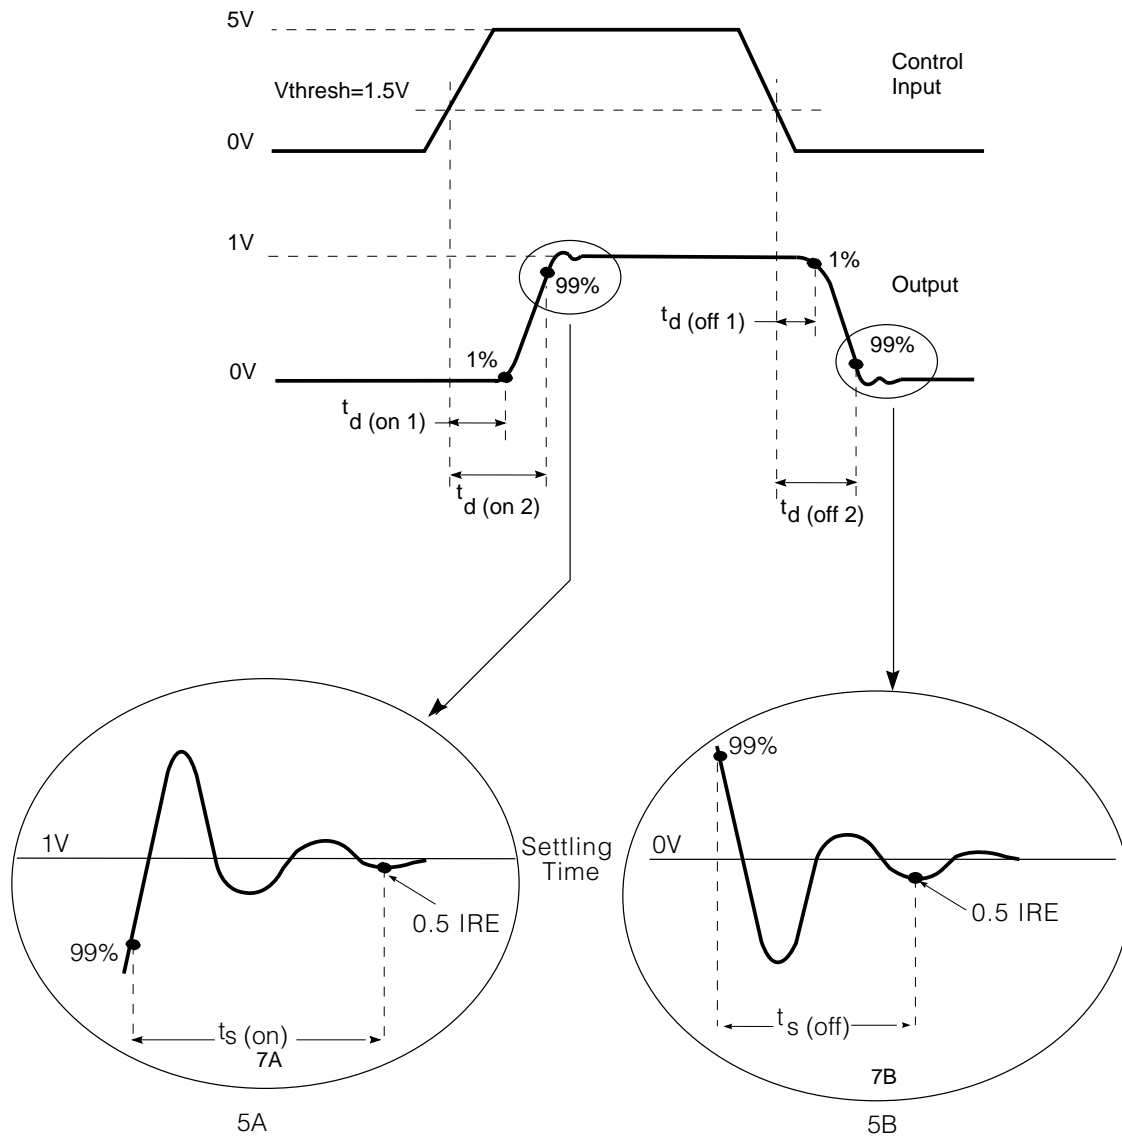


Fig. 7 Delay Time

DOCUMENT IDENTIFICATION

PRODUCT PROPOSAL

This data has been compiled for market investigation purposes only, and does not constitute an offer for sale.

ADVANCE INFORMATION NOTE

This product is in development phase and specifications are subject to change without notice. Gennum reserves the right to remove the product at any time. Listing the product does not constitute an offer for sale.

PRELIMINARY DATA SHEET

The product is in a preproduction phase and specifications are subject to change without notice.

DATA SHEET

The product is in production. Gennum reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible.

CAUTION
ELECTROSTATIC SENSITIVE DEVICES
DO NOT OPEN PACKAGES OR HANDLE EXCEPT AT A STATIC-FREE WORKSTATION

Gennum Corporation assumes no responsibility for the use of any circuits described herein and makes no representations that they are free from patent infringement.

© Copyright February 1991 Gennum Corporation . Revision Date: January 1993. All rights reserved. Printed in Canada.