

H21L1, H21L2
H22L1, H22L2

**ISO - LOGIC INVERTER
SCHMITT TRIGGER
INTERRUPTER SWITCH**



DESCRIPTION


The H21L_ and H22L_ series of transmissive photointerrupters are single channel switches consisting of a Gallium Arsenide infrared emitting diode coupled to a high speed integrated circuit detector. The output incorporates a Schmitt trigger which provides hysteresis for noise immunity and pulse shaping. The gap in the plastic housing provides a means of interrupting the signal with an opaque material, switching the output from an 'ON' into an 'OFF' state.

FEATURES

- Built in Schmitt trigger circuit
- Open collector output
- High sensitivity
- 3mm gap between LED and detector
- 1mm aperture over LED and detector


APPLICATIONS

- Floppy disk drives, Copiers, Printers, Facsimilies, VCR's, Cassette tape Recorders, Automatic vending machines

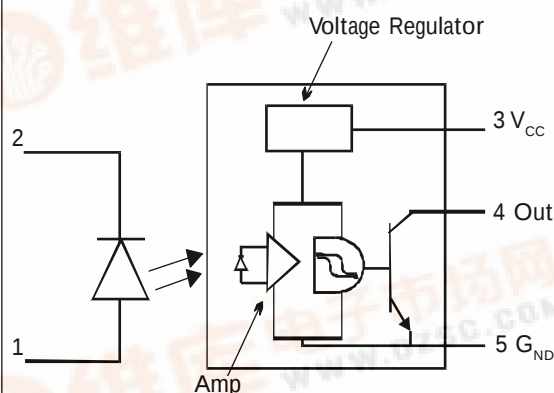


Dimensions in mm

**H22L1
H22L2**

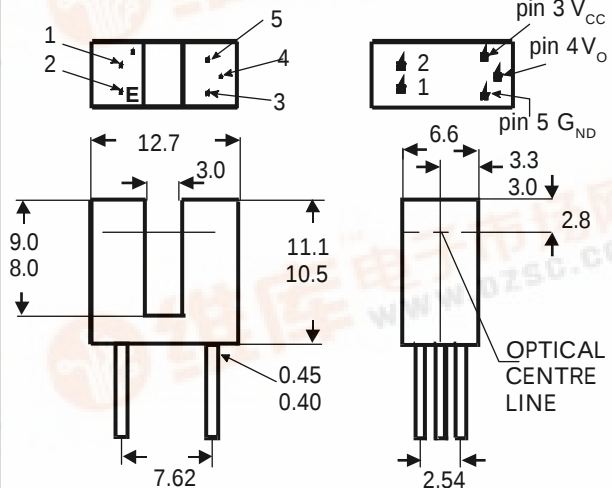

**H21L1
H21L2**

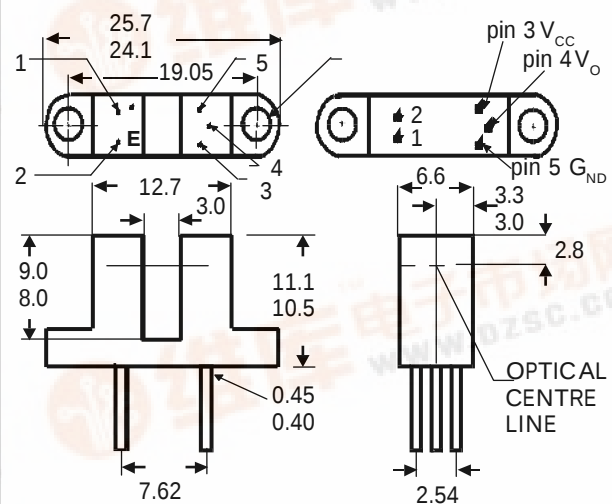

ISOCOM COMPONENTS LTD

Unit 25B, Park View Road West,
Park View Industrial Estate, Brenda Road
Hartlepool, Cleveland, TS25 1YD
Tel: (01429) 863609 Fax: (01429) 863581

ISOCOM INC

720 E., Park Boulevard, Suite 104,
Plano, TX 75074 USA
Tel: (972) 423-5521
Fax: (972) 422-4549

ABSOLUTE MAXIMUM RATINGS (25°C unless otherwise specified)

Storage Temperature	_____	-40°C to +85°C
Operating Temperature	_____	-25°C to +85°C
Lead Soldering Temperature	_____	260°C
(5 secs maximum)		

INFRARED EMITTING DIODE

Power Dissipation	_____	75 mW
Forward Current (Continuous)	_____	50 mA
Forward Current (Peak)	_____	1 A
(Pulse Width ≤ 100μs, Duty Ratio = 0.01)		
Reverse Voltage	_____	6V

PHOTO DETECTOR


Power Dissipation	_____	250 mW
Output Current	_____	50mA
Allowed Range V ³⁵	_____	0 to 35V
Allowed Range V ⁴⁵	_____	0 to 40V

ELECTRICAL CHARACTERISTICS (T_A = 25°C Unless otherwise noted)


PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V _F)		1.1	1.6	V	I _F = 20mA
	Reverse Voltage (V _R)	6			V	I _R = 10μA
	Reverse Current (I _R)			10	μA	V _R = 3V
Detector	Operating Voltage Range V _{CC}	4		15	V	
	Low Level Supply Current I _{CCL}		1.6	5	mA	V _{CC} = 5V, I _F = 20mA
	High Level Supply Current I _{CCH}		1.0	5	mA	V _{CC} = 5V, I _F = 0mA
	Low Level Output Voltage V _{OL}			0.4	V	V _{CC} = 5V, I _F = 30mA R _L = 270Ω
	High Level Output Current I _{OH}			100	μA	V _{CC} = 15V, I _F = 0mA V _O = 15V
	Turn-on Threshold Current I _F (ON)					
	H21L1, H22L1			30	mA	V _{CC} = 5V, R _L = 270Ω
	H21L2, H22L2			15	mA	V _{CC} = 5V, R _L = 270Ω
	Turn-off Threshold Current I _F (OFF)					
	H21L1, H22L1	0.5			mA	V _{CC} = 5V, R _L = 270Ω
	H21L2, H22L2	0.5			mA	V _{CC} = 5V, R _L = 270Ω
	Hysteresis Ratio I _F (OFF) / I _F (ON)	0.5		0.9		V _{CC} = 5V, R _L = 270Ω
	Rise Time	tr	0.1		μs	V _{CC} = 5V I _F = 20mA
	Fall Time	tf	0.05		μs	R _L = 270Ω

Note 1 Special Selections are available on request. Please consult the factory.


Collector Power Dissipation vs. Ambient Temperature

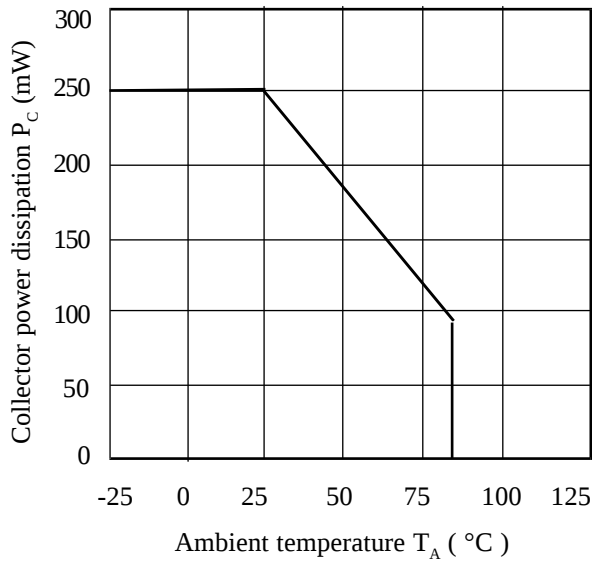


Low Level Output Voltage vs. Low Level Output Current

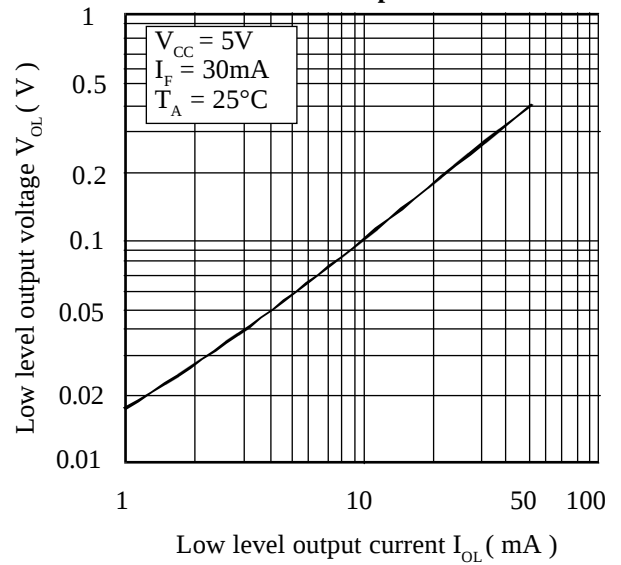


Forward Current vs. Ambient Temperature

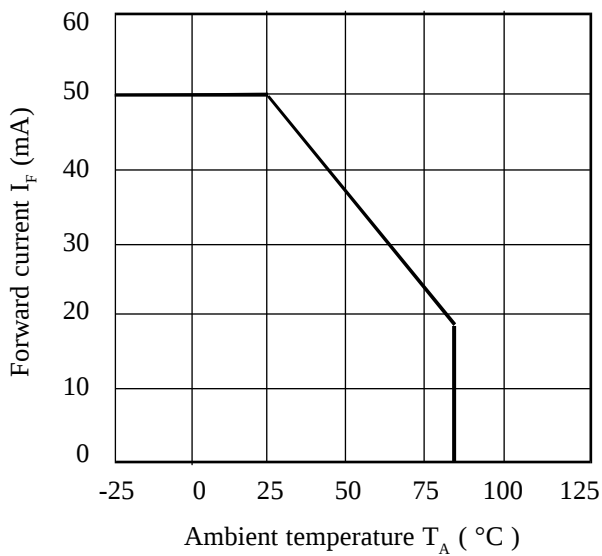

Rise Time, Fall Time vs. Load Resistance

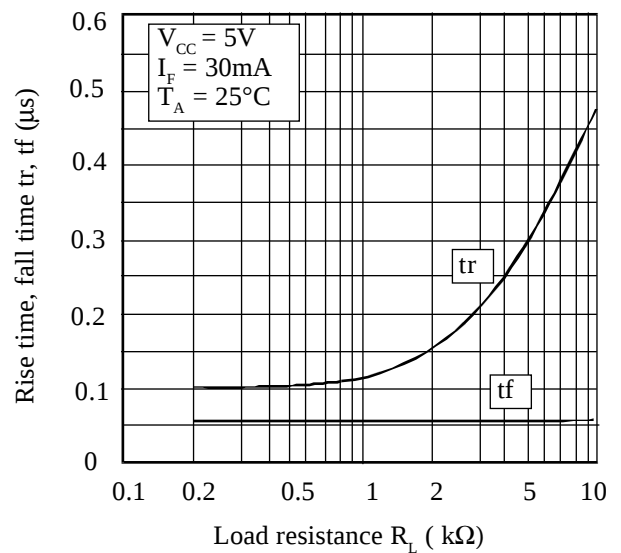

Supply Current vs. Ambient Temperature

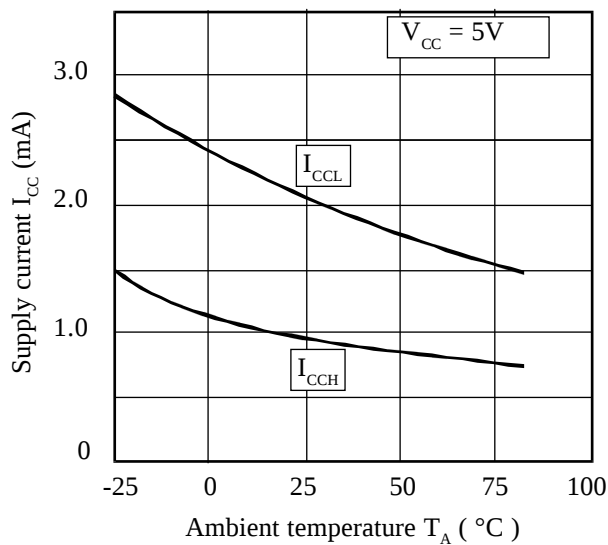

Low Level Output Voltage vs. Ambient Temperature

