

HD29051

Dual Differential Line Drivers / Receivers With 3 State Outputs

The HD29051 features differential line drivers / receivers with three state output designed to meet the spec of EIA RS-422A and 423A. Each device has two drivers / receivers in a 16 pin package. The device becomes in enable state when active high for a driver and active low for a receiver.

Features


Driver

- Built in current restriction when short circuit
- Power up / down protection.
- High output current $I_{OH} = -40 \text{ mA}$
 $I_{OL} = 40 \text{ mA}$

Receiver

- Input hysteresis (Typ. 50 mV)
- In phase input voltage $\pm 200 \text{ mV}$ of input sensitivity in the range $-7 \text{ to } +12 \text{ V}$.

Pin Arrangement

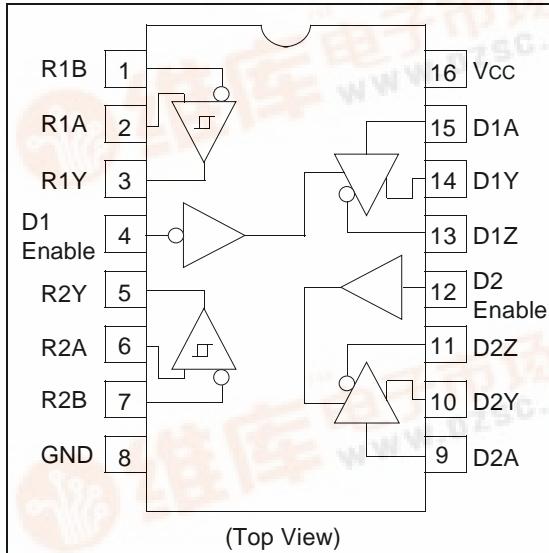

Function Table

| Drivers | | | |
|---------|--------|----------|----------|
| Input A | Enable | Output Y | Output Z |
| L | H | L | H |
| H | H | H | L |
| X | L | Z | Z |

Receivers

| Differential Input A – B | Output Y |
|---|----------|
| $V_{ID} \geq 0.2 \text{ V}$ | H |
| $-0.2 \text{ V} < V_{ID} < 0.2 \text{ V}$ | ? |
| $V_{ID} \leq -0.2 \text{ V}$ | L |

H : High level
L : Low level
Z : High impedance
X : Immaterial
? : Irrelevant

HD29051**HD29051**

Absolute Maximum Ratings

| Item | Symbol | Ratings | Unit |
|----------------------------------|------------------|-------------|------|
| Supply Voltage *1 | Vcc | 7 | V |
| Input Voltage A , B *3 | VIN | ± 25 | V |
| Differential Input Voltage *2 *3 | VID | ± 25 | V |
| Output Current *3 | Io | 50 | mA |
| Enable Input Voltage | VI _E | 5.5 | V |
| Input Voltage *4 | VIN | 5.5 | V |
| Output Applied Voltage *4 *5 | VO | -1.0 to 7.0 | V |
| Operating Temperature Range | T _{opr} | 0 to 70 | °C |
| Storage Temperature Range | T _{stg} | -65 to 150 | °C |

Notes: 1. All voltage values except for differential input voltage are with respect to network ground terminal.

2. Differential input voltage is measured at the noninverting input with respect to the corresponding inverting input.

3. Only receiver

4. Only driver

5. Z state

6. The absolute maximum ratings are values which must not individually be exceeded, and furthermore, no two of which may be realized at the same time.

Recommended Operating Conditions

| Item | Symbol | Min | Typ | Max | Unit |
|-------------------------------|------------------|------|-----|------|------|
| Supply Voltage | Vcc | 4.75 | 5.0 | 5.25 | V |
| In Phase Input Voltage *1 | VI _C | -7.0 | — | 12 | V |
| Differential Input Voltage *1 | VID | -6.0 | — | 6.0 | V |
| Enable Input Voltage | VI _E | 0 | — | 5.25 | V |
| Input Voltage *2 | VIN | 0 | — | 5.25 | V |
| Operating Temperature | T _{opr} | 0 | 25 | 70 | °C |

Notes: 1. Only receiver

2. Only driver

HD29051**HD29051**

Electrical Characteristics (Ta = 0 to +70°C)**Driver**

| Item | Symbol | Min | Typ | Max | Unit | Conditions |
|------------------------------|---------|------|-----|------|------|--|
| Input Voltage | VIHD | 2.0 | — | — | V | |
| | VILD | — | — | 0.8 | V | |
| Input Clamp Voltage | VIKD | — | — | -1.5 | V | Vcc = 4.75 V Ii = -18 mA |
| Output Voltage | VOHD | 2.5 | — | — | V | Vcc = 4.75 V IOH = -20 mA |
| | | 2.4 | — | — | V | Vcc = 4.75 V IOH = -40 mA |
| | VOLD | — | — | 0.45 | V | Vcc = 4.75 V IOL = 20 mA |
| | | — | — | 0.5 | V | Vcc = 4.75 V IOL = 40 mA |
| Output Leak Current | IOZD | -100 | — | 100 | µA | Vcc = 5.25 V, Vo = 0.5 V Enable = 0.8 V |
| | | -100 | — | 100 | µA | Vcc = 5.25 V, Vo = 2.7 V Enable = 0.8 V |
| | IO(off) | — | — | -100 | µA | Vcc = 0 V Vo = -0.25 V |
| | | — | — | 100 | µA | Vcc = 0 V Vo = 6.0 V |
| Input Current | IID | — | — | 100 | µA | Vcc = 5.25 V Vi = 5.25 V |
| | IIHD | — | — | 20 | µA | Vcc = 5.25 V Vi = 2.7 V |
| | IIHD | — | — | -360 | µA | Vcc = 5.25 V Vi = 0.4 V |
| Differential Output Voltage | Δ Voc | — | — | 0.4 | V | |
| | Vod2 | 2.0 | — | — | V | |
| | Δ Vod | — | — | 0.4 | V | |
| Short Circuit Output Current | *1 IOSD | -30 | — | -150 | mA | Vcc = 5.25 V Vo = 0 V |

HD29051**HD29051**

Electrical Characteristics (Ta = 0 to +70°C)**Receiver**

| Item | Symbol | Min | Typ | Max | Unit | Conditions |
|--|--------|------|-----|------|------|---|
| Differential Input Threshold Voltage ^{*2} | VTHR | — | — | 0.2 | V | $V_o \geq 2.7 \text{ V}$ $-7.0 \text{ V} < V_{IC} < 12 \text{ V}$ |
| | | -0.2 | — | — | V | $V_o \leq 0.45 \text{ V}$ $-7.0 \text{ V} < V_{IC} < 12 \text{ V}$ |
| Input Current | IIBR | — | — | 1.0 | mA | $V_{IN} = 12 \text{ V}$ $0 \text{ V} \leq V_{CC} \leq 5.25 \text{ V}$ |
| | | — | — | -0.8 | mA | $V_{IN} = -7 \text{ V}$ $0 \text{ V} \leq V_{CC} \leq 5.25 \text{ V}$ |
| Output Voltage | VOHR | 2.7 | — | — | V | $V_{CC} = 4.75 \text{ V}, I_o = -400 \mu\text{A}$ $V_{ID} = 0.4 \text{ V}, -7.0 \text{ V} < V_{IC} < 12 \text{ V}$ |
| | VOLR | — | — | 0.45 | V | $V_{CC} = 4.75 \text{ V}, I_o = 8.0 \text{ mA}$ $V_{ID} = -0.4 \text{ V}, -7.0 \text{ V} < V_{IC} < 12 \text{ V}$ |
| Short Circuit Output Current ^{*1} | IOSR | -15 | — | -85 | mA | $V_{CC} = 5.25 \text{ V}, V_o = 0 \text{ V}$ $V_{ID} = 3.0 \text{ V}$ |

Supply

| Item | Symbol | Min | Typ | Max | Unit | Conditions |
|----------------|--------|-----|------------------|-----|------|---------------------------|
| Supply Current | Icc | — | 55 ^{*3} | 80 | mA | $V_{CC} = 5.25 \text{ V}$ |

- Notes:
1. Not more than one output should be shorted at a time, and duration of the short circuit should not exceed one second.
 2. In this table, only the threshold voltage is expressed in algebra.
 3. All typical values are at $V_{CC} = 5\text{V}$, $T_a = 25^\circ\text{C}$.

HD29051**HD29051**

Switching Characteristics ($T_a = 25^\circ C$, $V_{CC} = 5 V$)**Driver**

| Item | Symbol | Min | Typ | Max | Unit | Conditions |
|-----------------------------------|--------------------|-----|-----|-----|------|---|
| Propagation Delay Time | tPLHD | — | — | 20 | ns | CL = 30 pF, RL = 75 Ω to GND RL = 180 Ω to Vcc |
| | tPHLD | — | — | 20 | ns | CL = 30 pF, RL = 75 Ω to GND RL = 180 Ω to Vcc |
| Propagation Delay Time Difference | tSKD ^{*1} | — | — | 4 | ns | CL = 30 pF, RL = 75 Ω to GND RL = 180 Ω to Vcc |
| Output Enable Time | tzHD | — | — | 20 | ns | CL = 30 pF RL = 75 Ω to GND |
| | tzLD | — | — | 35 | ns | CL = 30 pF RL = 180 Ω to Vcc |
| Output Disable Time | tHZD | — | — | 20 | ns | CL = 10 pF RL = 75 Ω to GND |
| | tlZD | — | — | 25 | ns | CL = 10 pF RL = 180 Ω to Vcc |

Receiver


| Item | Symbol | Min | Typ | Max | Unit | Conditions |
|------------------------|--------|-----|-----|-----|------|------------|
| Propagation Delay Time | tPLHR | — | — | 40 | ns | CL = 15 pF |
| | tPHLR | — | — | 40 | ns | CL = 15 pF |

Note: 1. $t_{SKD} = |t_{PLHD} - t_{PHLD}|$


HD29051**HD29051**

DC Test ($|V_{OD2}|, \Delta |V_{OD}|, V_{OC}, \Delta |V_{OC}|$)

$|V_{OD2}|, \Delta |V_{OD}|$ Test

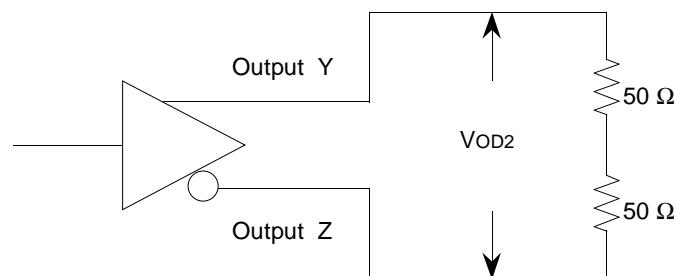

$V_{OC}, \Delta |V_{OC}|$ Test

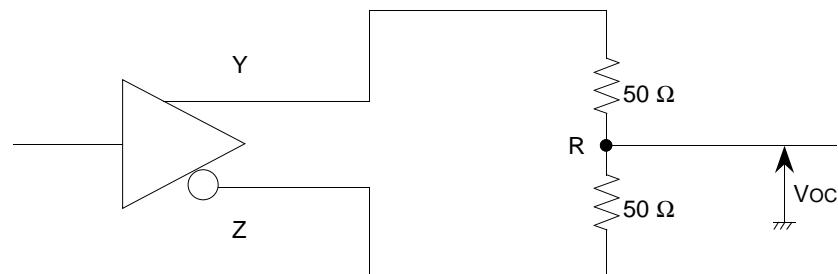

$\Delta |V_{OD}|$ and $\Delta |V_{OC}|$ indicate the differences of voltage from the former states when Y and Z outputs are inversed.

$$\Delta |V_{OD}| = ||V_{OD2}| - |\overline{V_{OD2}}||$$


$$\Delta |V_{OC}| = |V_{OC} - \overline{V_{OC}}|$$

HD29051


HD29051

1. tPLHD, tPHLD

Test circuit

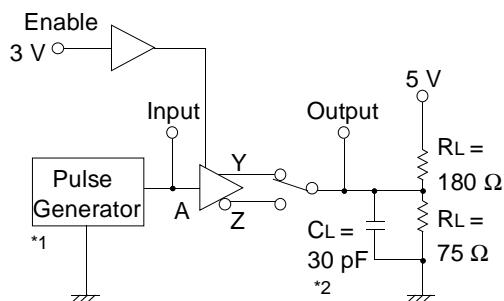


Waveforms

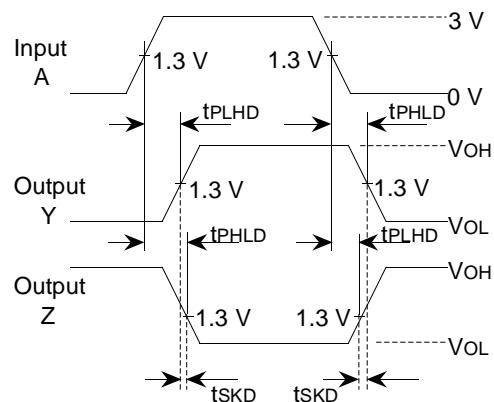


2. tzHD, tzLD, thZD, tlZD

Test circuit

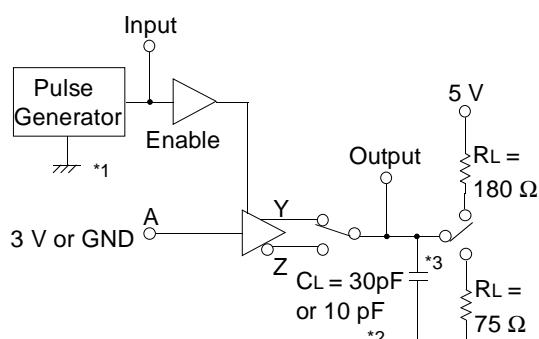


Waveforms

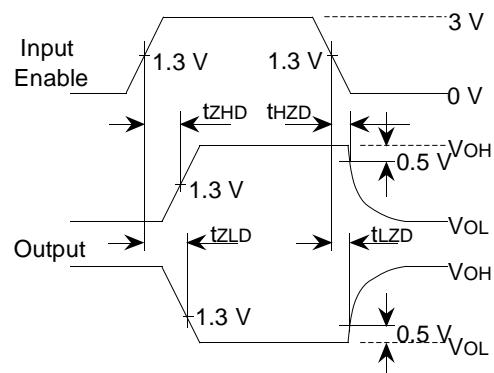


3. tPLHR , tPHLR

Test circuit

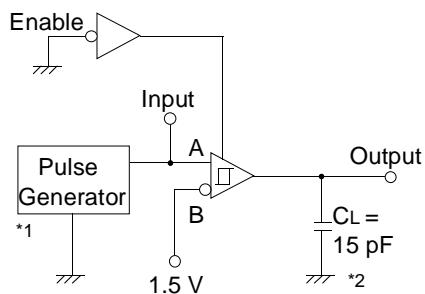

Waveforms

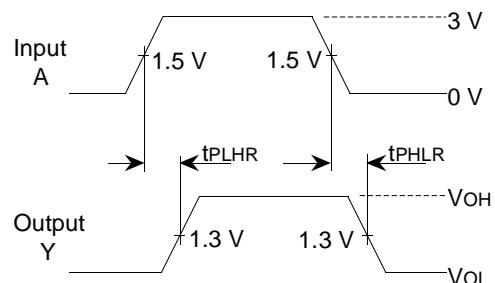


Notes: 1. The pulse generator has the following characteristics:

- PRR = 1 MHz, 50 % duty cycle, $t_r = t_f = 6.0$ ns.
- 2. C_L includes probe and jig capacitance.
- 3. 75Ω connected between the pin and GND at tZHD tHZD test.
- 180 Ω connected between the pin and GND at tZHD tHZD test.
- 4. At tHZR, tLZR test, S₁ and S₂ are closed.
- At tZHR test, S₁ is open and S₂ is closed.
- At tZLR test, S₁ is closed and S₂ is open.

HD29051

HD29051

Main Characteristics

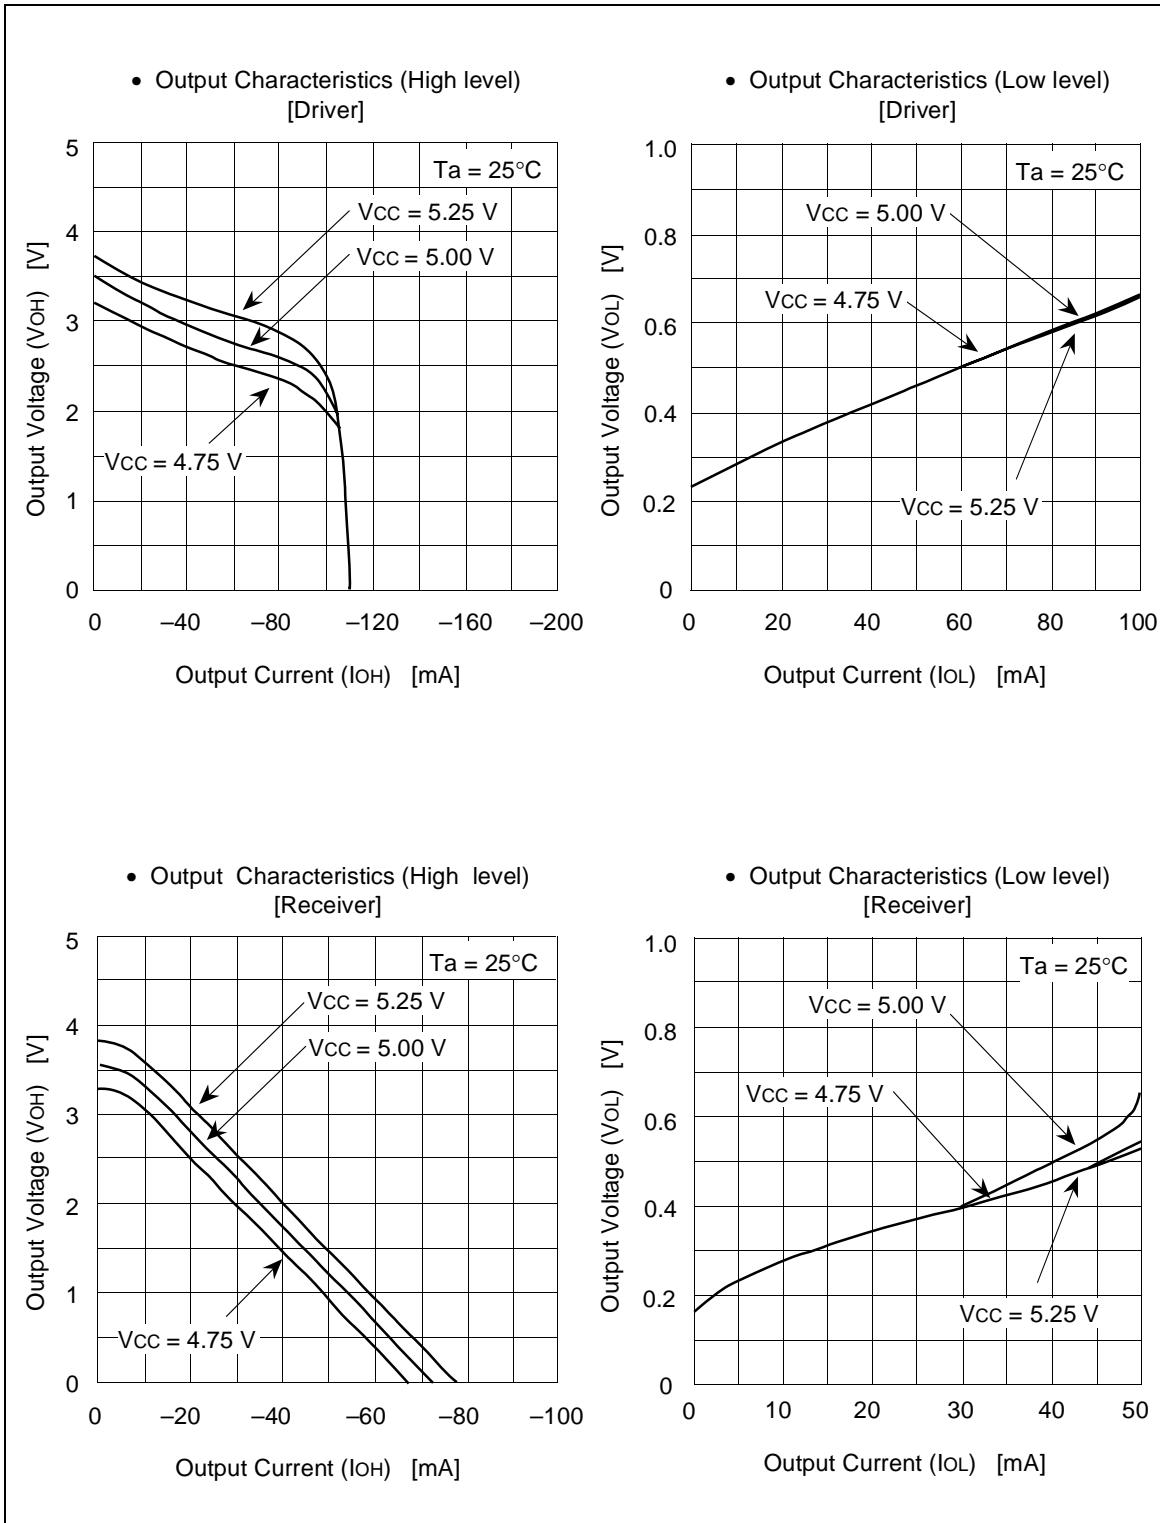

HD29051

HD29051

- Input / Output Characteristics
[Receiver]

