


仕様書

形 名
R C P 1 3 1 7

1. 外形

1-1. 寸法図(mm)

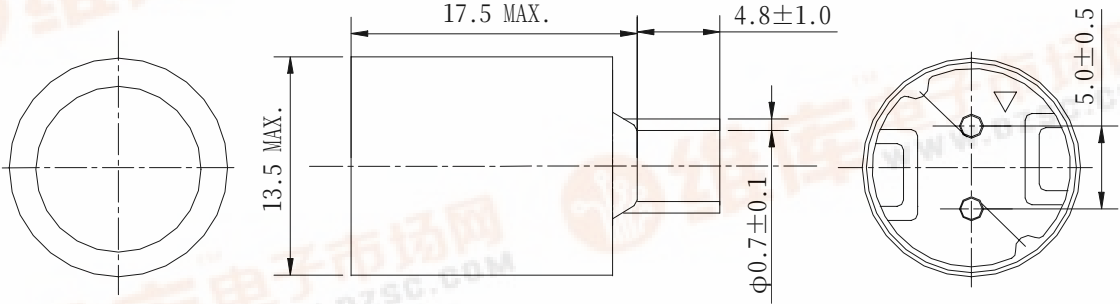

＊ 端子の寸法は、はんだつららを除く。

＊ 端子のピッチは、端子根元での寸法。


1-2. 捺印表示例



RoHS
compliance
Cd:Max.0.01wt%
others:Max.0.1wt%

2. コイル仕様

2-1. 端子接続図(裏面図)



2-2. 電気的特性

NO.	品 名	表示	インダクタンス <以内> ※1	D.C.R.(Ω) <以下> (at 20°C) ※2	直流重畳許容電流(A) ※3		温度上昇許容 電流(A) ※4	スミダ コード
					(at 20°C)	(at 100°C)		
01	RCP1317NP-33ØM	330	33 μH±20%	58m (46m)	4.80	4.40	3.60	-0005
02	RCP1317NP-47ØM	470	47 μH±20%	69m (55m)	4.30	3.80	3.30	-0006
03	RCP1317NP-68ØM	680	68 μH±20%	101m (81m)	3.30	3.00	2.60	-0007
04	RCP1317NP-82ØM	820	82 μH±20%	110m (88m)	3.10	2.70	2.50	-0008
05	RCP1317NP-101M	101	100 μH±20%	125m (100m)	2.80	2.50	2.30	-0009

仕 様 書

形 名
R C P 1 3 1 7

NO.	品 名	表示	インダクタンス <以内> ※1	D.C.R. (Ω) <以下> (at 20°C) ※2	直流重畳許容電流(A) ※3		温度上昇許容電流 (A) ※4	スミダ コード
					(at 20°C)	(at 100°C)		
06	RCP1317NP-121L	121	120 μH±15%	139m (116m)	2.60	2.30	2.20	-0010
07	RCP1317NP-151L	151	150 μH±15%	195m (156m)	2.40	2.10	1.90	-0011
08	RCP1317NP-181L	181	180 μH±15%	213m (171m)	2.20	1.80	1.80	-0012
09	RCP1317NP-221L	221	220 μH±15%	278m (223m)	1.90	1.70	1.60	-0013
10	RCP1317NP-271L	271	270 μH±15%	0.33 (0.26)	1.70	1.60	1.55	-0014
11	RCP1317NP-331L	331	330 μH±15%	0.36 (0.29)	1.60	1.40	1.50	-0015
12	RCP1317NP-391L	391	390 μH±15%	0.44 (0.35)	1.45	1.28	1.30	-0016
13	RCP1317NP-471L	471	470 μH±15%	0.53 (0.42)	1.35	1.17	1.15	-0017
14	RCP1317NP-561L	561	560 μH±15%	0.59 (0.47)	1.25	1.05	1.10	-0018
15	RCP1317NP-681L	681	680 μH±15%	0.78 (0.62)	1.12	0.95	1.00	-0019
16	RCP1317NP-821L	821	820 μH±15%	0.95 (0.76)	1.02	0.85	0.85	-0020
17	RCP1317NP-102L	102	1.0mH±15%	1.18 (0.94)	0.90	0.70	0.82	-0021
18	RCP1317NP-122L	122	1.2mH±15%	1.28 (1.07)	0.80	0.65	0.74	-0022
19	RCP1317NP-152L	152	1.5mH±15%	1.40 (1.16)	0.72	0.60	0.72	-0023
20	RCP1317NP-182L	182	1.8mH±15%	2.00 (1.70)	0.68	0.56	0.58	-0024
21	RCP1317NP-222L	222	2.2mH±15%	2.28 (1.90)	0.62	0.52	0.52	-0025
22	RCP1317NP-272L	272	2.7mH±15%	3.07 (2.56)	0.58	0.50	0.48	-0026
23	RCP1317NP-332L	332	3.3mH±15%	3.31 (2.76)	0.51	0.45	0.45	-0027
24	RCP1317NP-392L	392	3.9mH±15%	4.52 (3.77)	0.47	0.42	0.42	-0028
25	RCP1317NP-472L	472	4.7mH±15%	5.02 (4.18)	0.43	0.37	0.37	-0029

※1 測定周波数 インダクタンス at 1kHz

※2 ()内は、標準値とする。

※3 直流重畳許容電流：直流重畳特性について、インダクタンスが初期値より65%となる電流値。

※4 温度上昇許容電流：通電時、コイルの温度上昇がΔT=40°Cになる電流値。(Ta=20°Cを基準とする。)


3. 保存温度範囲 -40°C ～ +100°C
 使用温度範囲 -40°C ～ +100°C (コイルの発熱を含む。)

SPECIFICATION

TYPE
RCP1317

1. APPEARANCE


1-1. DIMENSIONS(mm)

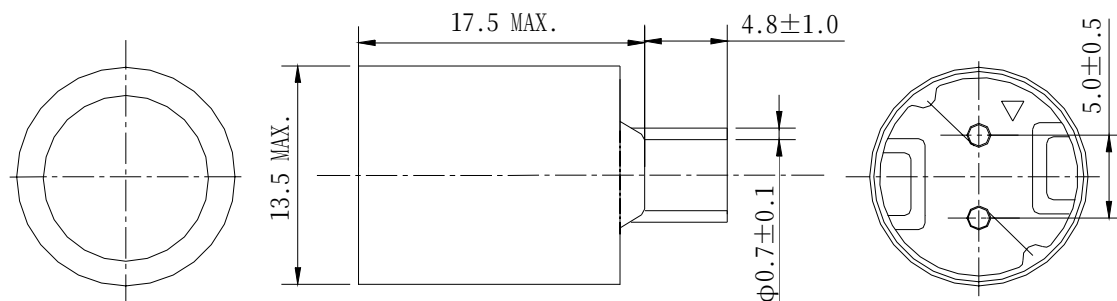

* DIMENSION DOES NOT INCLUDE SOLDER USED ON COIL.

* PIN PITCH SHALL BE MEASURED AT THE ROOT OF TERMINAL

1-2. STAMP (E.G.)

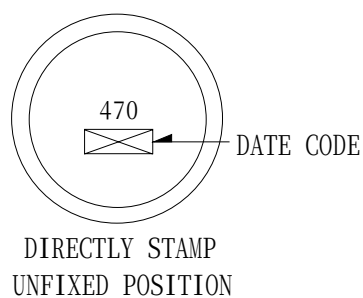

RoHS


compliance

Cd:Max.0.01wt%

others:Max.0.1wt%

2. COIL SPECIFICATION

2-1. CONNECTION (BOTTOM VIEW)



2-2. ELECTRICAL CHARACTERISTICS

NO.	PART NO.	STAMP	INDUCTANCE <WITHIN> ※1	D.C.R.(Ω) <MAX.> (at 20°C) ※2	DC SUPERPOSITION PERMISSION CURRENT ※3		TEMPERATURE RISE PERMISSION CURRENT (A) ※4	SUMIDA CODE
					(at 20°C)	(at 100°C)		
01	RCP1317NP-33ØM	330	33 μH ± 20%	58m (46m)	4.80	4.40	3.60	
02	RCP1317NP-47ØM	470	47 μH ± 20%	69m (55m)	4.30	3.80	3.30	
03	RCP1317NP-68ØM	680	68 μH ± 20%	101m (81m)	3.30	3.00	2.60	
04	RCP1317NP-82ØM	820	82 μH ± 20%	110m (88m)	3.10	2.70	2.50	
05	RCP1317NP-1Ø1M	101	100 μH ± 20%	125m (100m)	2.80	2.50	2.30	

SPECIFICATION

TYPE
RCP1317

2-2. ELECTRICAL CHARACTERISTICS

NO.	PART NO.	STAMP	INDUCTANCE <WITHIN> ※1	D.C.R. (Ω) <MAX.> (at 20°C) ※2	DC SUPERPOSITION PERMISSION CURRENT ※3		TEMPERATURE RISE PERMISSION CURRENT (A) ※4	SUMIDA CODE
					(at 20°C)	(at 100°C)		
06	RCP1317NP-121L	121	120 μH±15%	139m (116m)	2.60	2.30	2.20	
07	RCP1317NP-151L	151	150 μH±15%	195m (156m)	2.40	2.10	1.90	
08	RCP1317NP-181L	181	180 μH±15%	213m (171m)	2.20	1.80	1.80	
09	RCP1317NP-221L	221	220 μH±15%	278m (223m)	1.90	1.70	1.60	
10	RCP1317NP-271L	271	270 μH±15%	0.33 (0.26)	1.70	1.60	1.55	
11	RCP1317NP-331L	331	330 μH±15%	0.36 (0.29)	1.60	1.40	1.50	
12	RCP1317NP-391L	391	390 μH±15%	0.44 (0.35)	1.45	1.28	1.30	
13	RCP1317NP-471L	471	470 μH±15%	0.53 (0.42)	1.35	1.17	1.15	
14	RCP1317NP-561L	561	560 μH±15%	0.59 (0.47)	1.25	1.05	1.10	
15	RCP1317NP-681L	681	680 μH±15%	0.78 (0.62)	1.12	0.95	1.00	
16	RCP1317NP-821L	821	820 μH±15%	0.95 (0.76)	1.02	0.85	0.85	
17	RCP1317NP-102L	102	1.0mH±15%	1.18 (0.94)	0.90	0.70	0.82	
18	RCP1317NP-122L	122	1.2mH±15%	1.28 (1.07)	0.80	0.65	0.74	
19	RCP1317NP-152L	152	1.5mH±15%	1.40 (1.16)	0.72	0.60	0.72	
20	RCP1317NP-182L	182	1.8mH±15%	2.00 (1.70)	0.68	0.56	0.58	
21	RCP1317NP-222L	222	2.2mH±15%	2.28 (1.90)	0.62	0.52	0.52	
22	RCP1317NP-272L	272	2.7mH±15%	3.07 (2.56)	0.58	0.50	0.48	
23	RCP1317NP-332L	332	3.3mH±15%	3.31 (2.76)	0.51	0.45	0.45	
24	RCP1317NP-392L	392	3.9mH±15%	4.52 (3.77)	0.47	0.42	0.42	
25	RCP1317NP-472L	472	4.7mH±15%	5.02 (4.18)	0.43	0.37	0.37	

※1: MEASURED FREQUENCY INDUCTANCE : at 1 kHz

※2 () TYPICAL VALUE.

※3: DC SUPERPOSITION PERMISSION CURRENT: THE VALUE OF D.C. CURRENT WHEN THE INDUCTANCE IS OVER 65% OF THE INITIAL VALUE.

※4: TEMPERATURE RISE PERMISSION CURRENT: THE DC CURRENT WHEN COIL ' S SELF TEMPERATURE RISE IS 40°C.
(Ta=20°C)

3. STORAGE TEMPERATURE RANGE : -40°C ~ +100°C
OPERATING TEMPERATURE RANGE: -40°C ~ +100°C (INCLUDING SELF TEMPERATURE RISE)