



# SEMICONDUCTOR TECHNICAL DATA

**KIA7805AF~KIA7824AF**  
BIPOLAR LINEAR INTEGRATED CIRCUIT


THREE TERMINAL POSITIVE VOLTAGE REGULATORS  
5V, 6V, 8V, 9V, 10V, 12V, 15V, 18V, 20V, 24V.

## FEATURES


- Suitable for C-MOS, TTL, the Other Digital IC's Power Supply.
- Internal Thermal Overload Protection.
- Internal Short Circuit Current Limiting.
- Output Current in Excess of 1A.
- Satisfies IEC-65 Specification. (International Electreronical Commission).
- Package is DPAK.

MAXIMUM RATINGS (Ta=25 °C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Input Voltage	KIA7805AF~KIA7815AF	V <sub>IN</sub>	35	V
	KIA7818AF~KIA7824AF		40	V
Power Dissipation (Tc=25 °C)		P <sub>D</sub>	12	W
Power Dissipation (Without Heatsink)		P <sub>D</sub>	1.3	W
Operating Junction Temperature		T <sub>j</sub>	-30 ~ 150	°C
Storage Temperature		T <sub>stg</sub>	-55 ~ 150	°C

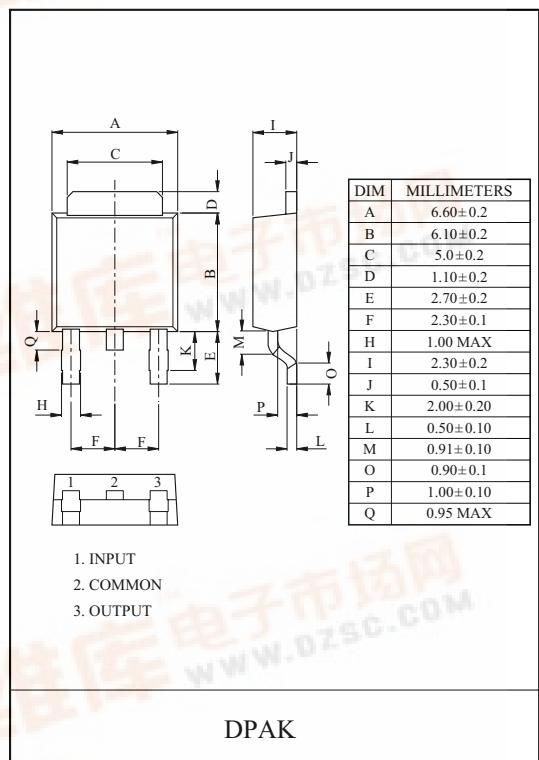

## EQUIVALENT CIRCUIT

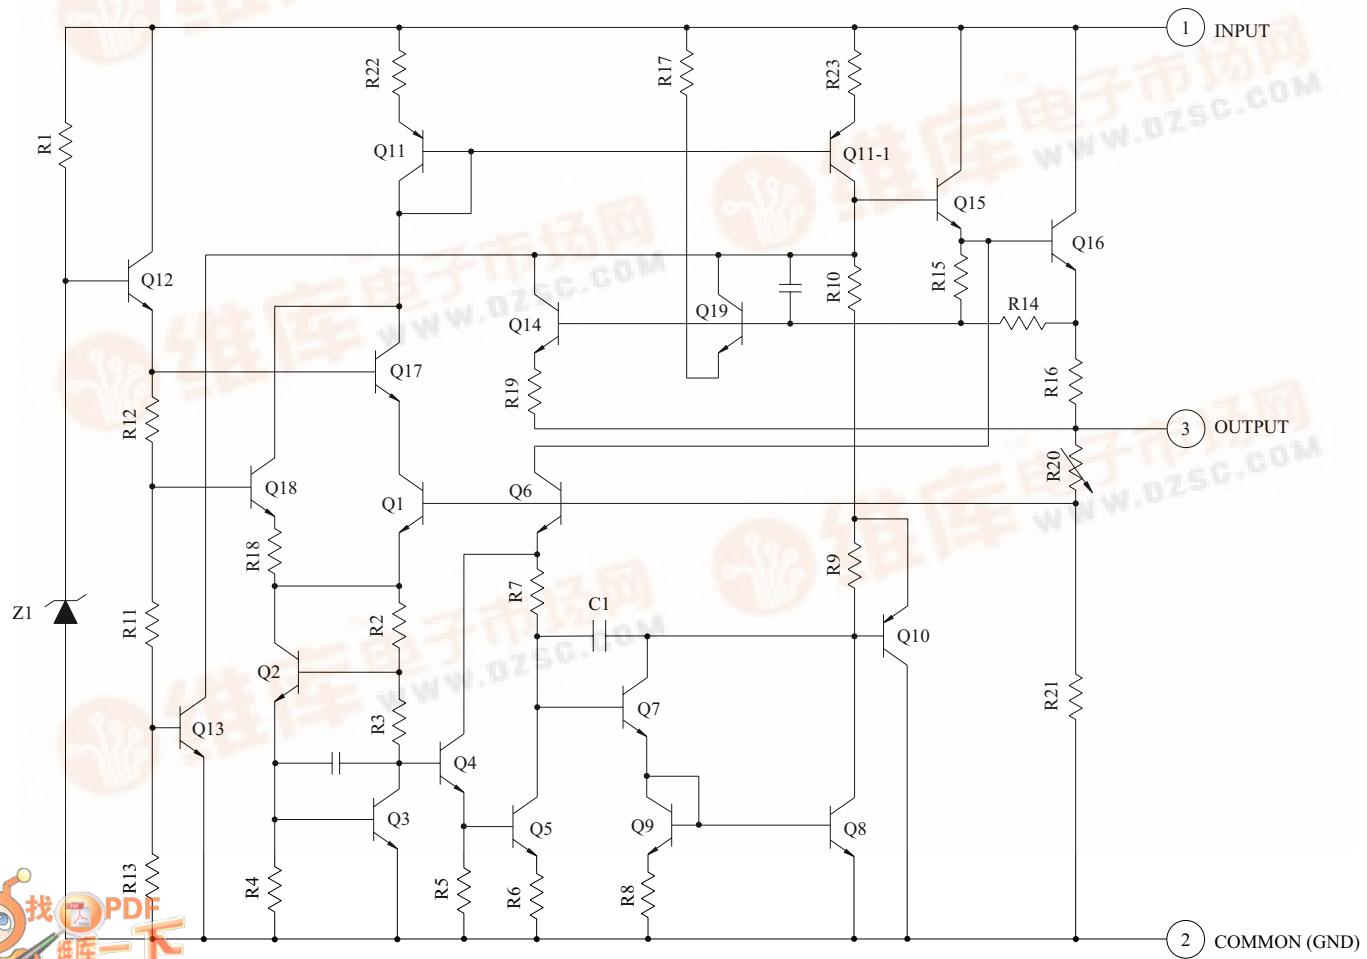

# KIA7805AF~KIA7824AF

---

KIA7805AF

ELECTRICAL CHARACTERISTICS ( $V_{IN}=10V$ ,  $I_{OUT}=500mA$ ,  $0^\circ C \leq T_j \leq 125^\circ C$ )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j=25^\circ C$ , $I_{OUT}=100mA$		4.8	5.0	5.2	V
Input Regulation	Reg line	1	$T_j=25^\circ C$	7.0V $\leq V_{IN} \leq 25V$	-	3	100	mV
				8.0V $\leq V_{IN} \leq 12V$	-	1	50	
Load Regulation	Reg load	1	$T_j=25^\circ C$	5mA $\leq I_{OUT} \leq 1.4A$	-	15	100	mV
				250mA $\leq I_{OUT} \leq 750mA$	-	5	50	
Output Voltage	$V_{OUT}$	1	7.0V $\leq V_{IN} \leq 20V$ 5.0mA $\leq I_{OUT} \leq 1.0A$ , $P_o \leq 15W$		4.75	-	5.25	V
Quiescent Current	$I_B$	1	$T_j=25^\circ C$ , $I_{OUT}=5mA$		-	4.2	8.0	mA
Quiescent Current Change	$\Delta I_B$	1	7.0V $\leq V_{IN} \leq 25V$		-	-	1.3	mA
Output Noise Voltage	$V_{NO}$	1	$T_a=25^\circ C$ , 10Hz $\leq f \leq 100kHz$ $I_{OUT}=50mA$		-	50	-	$\mu V_{rms}$
Ripple Rejection Ratio	RR	1	$f=120Hz$ , 8.0V $\leq V_{IN} \leq 18V$ , $I_{OUT}=50mA$ , $T_j=25^\circ C$		62	78	-	dB
Dropout Voltage	$V_D$	1	$I_{OUT}=1.0A$ , $T_j=25^\circ C$		-	2.0	-	V
Short Circuit Current Limit	$I_{SC}$	1	$T_j=25^\circ C$		-	1.6	-	A
Average Temperature Coefficient of Output Voltage	$TC_{VO}$	1	$I_{OUT}=5mA$ , $0^\circ C \leq T_j \leq 125^\circ C$		-	-0.6	-	mV/°C

# KIA7805AF~KIA7824AF

---

KIA7806AF

ELECTRICAL CHARACTERISTICS ( $V_{IN}=11V$ ,  $I_{OUT}=500mA$ ,  $0^\circ C \leq T_j \leq 125^\circ C$ )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j=25^\circ C$ , $I_{OUT}=100mA$		5.75	6.0	6.25	V
Input Regulation	Reg line	1	$T_j=25^\circ C$	8.0V $\leq V_{IN} \leq 25V$	-	4	120	mV
				9V $\leq V_{IN} \leq 13V$	-	2	60	
Load Regulation	Reg load	1	$T_j=25^\circ C$	5mA $\leq I_{OUT} \leq 1.4A$	-	15	120	mV
				250mA $\leq I_{OUT} \leq 750mA$	-	5	60	
Output Voltage	$V_{OUT}$	1	$8V \leq V_{IN} \leq 21V$ $5.0mA \leq I_{OUT} \leq 1.0A$ , $P_o \leq 15W$		5.7	-	6.3	V
Quiescent Current	$I_B$	1	$T_j=25^\circ C$ , $I_{OUT}=5mA$		-	4.3	8.0	mA
Quiescent Current Change	$\Delta I_B$	1	$8V \leq V_{IN} \leq 25V$		-	-	1.3	mA
Output Noise Voltage	$V_{NO}$	1	$T_a=25^\circ C$ , $10Hz \leq f \leq 100kHz$ $I_{OUT}=50mA$		-	55	-	$\mu V_{rms}$
Ripple Rejection Ratio	RR	1	$f=120Hz$ , $9V \leq V_{IN} \leq 19V$ , $I_{OUT}=50mA$ , $T_j=25^\circ C$		61	77	-	dB
Dropout Voltage	$V_D$	1	$I_{OUT}=1.0A$ , $T_j=25^\circ C$		-	2.0	-	V
Short Circuit Current Limit	$I_{SC}$	1	$T_j=25^\circ C$		-	1.5	-	A
Average Temperature Coefficient of Output Voltage	$TC_{VO}$	1	$I_{OUT}=5mA$ , $0^\circ C \leq T_j \leq 125^\circ C$		-	-0.7	-	$mV/^\circ C$

# KIA7805AF~KIA7824AF

---

KIA7808AF

ELECTRICAL CHARACTERISTICS ( $V_{IN}=14V$ ,  $I_{OUT}=500mA$ ,  $0^\circ C \leq T_j \leq 125^\circ C$ )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j=25^\circ C$ , $I_{OUT}=100mA$		7.7	8.0	8.3	V
Input Regulation	Reg line	1	$T_j=25^\circ C$	10.5V $\leq V_{IN} \leq$ 25V	-	6	160	mV
				11V $\leq V_{IN} \leq$ 17V	-	2	80	
Load Regulation	Reg load	1	$T_j=25^\circ C$	5mA $\leq I_{OUT} \leq$ 1.4A	-	12	160	mV
				250mA $\leq I_{OUT} \leq$ 750mA	-	4	80	
Output Voltage	$V_{OUT}$	1	10.5V $\leq V_{IN} \leq$ 23V 5.0mA $\leq I_{OUT} \leq$ 1.0A, $P_o \leq 15W$		7.6	-	8.4	V
Quiescent Current	$I_B$	1	$T_j=25^\circ C$ , $I_{OUT}=5mA$		-	4.3	8.0	mA
Quiescent Current Change	$\Delta I_B$	1	10.5V $\leq V_{IN} \leq$ 25V		-	-	1.0	mA
Output Noise Voltage	$V_{NO}$	1	$T_a=25^\circ C$ , 10Hz $\leq f \leq$ 100kHz $I_{OUT}=50mA$		-	70	-	$\mu V_{rms}$
Ripple Rejection Ratio	RR	1	$f=120Hz$ , 11.5V $\leq V_{IN} \leq$ 21.5V, $I_{OUT}=50mA$ , $T_j=25^\circ C$		58	74	-	dB
Dropout Voltage	$V_D$	1	$I_{OUT}=1.0A$ , $T_j=25^\circ C$		-	2.0	-	V
Short Circuit Current Limit	$I_{SC}$	1	$T_j=25^\circ C$		-	1.1	-	A
Average Temperature Coefficient of Output Voltage	$TC_{VO}$	1	$I_{OUT}=5mA$ , $0^\circ C \leq T_j \leq 125^\circ C$		-	-1.0	-	mV/°C

# KIA7805AF~KIA7824AF

---

KIA7809AF

ELECTRICAL CHARACTERISTICS ( $V_{IN}=15V$ ,  $I_{OUT}=500mA$ ,  $0^\circ C \leq T_j \leq 125^\circ C$ )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j=25^\circ C$ , $I_{OUT}=100mA$		8.64	9.0	9.36	V
Input Regulation	Reg line	1	$T_j=25^\circ C$	11.5V $\leq V_{IN} \leq$ 26V	-	7.0	180	mV
				13V $\leq V_{IN} \leq$ 19V	-	2.5	90	
Load Regulation	Reg load	1	$T_j=25^\circ C$	5mA $\leq I_{OUT} \leq$ 1.4A	-	12	180	mV
				250mA $\leq I_{OUT} \leq$ 750mA	-	4.0	90	
Output Voltage	$V_{OUT}$	1	11.5V $\leq V_{IN} \leq$ 26V 5.0mA $\leq I_{OUT} \leq$ 1.0A, $P_o \leq 15W$		8.55	-	9.45	V
Quiescent Current	$I_B$	1	$T_j=25^\circ C$ , $I_{OUT}=5mA$		-	4.3	8.0	mA
Quiescent Current Change	$\Delta I_B$	1	11.5V $\leq V_{IN} \leq$ 26V		-	-	1.0	mA
Output Noise Voltage	$V_{NO}$	1	$T_a=25^\circ C$ , 10Hz $\leq f \leq$ 100kHz $I_{OUT}=50mA$		-	75	-	$\mu V_{rms}$
Ripple Rejection Ratio	RR	1	$f=120Hz$ , 12.5V $\leq V_{IN} \leq$ 22.5V, $I_{OUT}=50mA$ , $T_j=25^\circ C$		56	72	-	dB
Dropout Voltage	$V_D$	1	$I_{OUT}=1.0A$ , $T_j=25^\circ C$		-	2.0	-	V
Short Circuit Current Limit	$I_{SC}$	1	$T_j=25^\circ C$		-	1.0	-	A
Average Temperature Coefficient of Output Voltage	$TC_{VO}$	1	$I_{OUT}=5mA$ , $0^\circ C \leq T_j \leq 125^\circ C$		-	-1.1	-	mV/°C

# KIA7805AF~KIA7824AF

---

KIA7810AF

ELECTRICAL CHARACTERISTICS ( $V_{IN}=16V$ ,  $I_{OUT}=500mA$ ,  $0^\circ C \leq T_j \leq 125^\circ C$ )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j=25^\circ C$ , $I_{OUT}=100mA$		9.6	10.0	10.4	V
Input Regulation	Reg line	1	$T_j=25^\circ C$	12.5V $\leq V_{IN} \leq$ 27V	-	8	200	mV
				14V $\leq V_{IN} \leq$ 20V	-	2.5	100	
Load Regulation	Reg load	1	$T_j=25^\circ C$	5mA $\leq I_{OUT} \leq$ 1.4A	-	12	200	mV
				250mA $\leq I_{OUT} \leq$ 750mA	-	4	100	
Output Voltage	$V_{OUT}$	1	12.5V $\leq V_{IN} \leq$ 25V 5.0mA $\leq I_{OUT} \leq$ 1.0A, $P_o \leq 15W$		9.5	-	10.5	V
Quiescent Current	$I_B$	1	$T_j=25^\circ C$ , $I_{OUT}=5mA$		-	4.3	8.0	mA
Quiescent Current Change	$\Delta I_B$	1	12.5V $\leq V_{IN} \leq$ 27V		-	-	1.0	mA
Output Noise Voltage	$V_{NO}$	1	$T_a=25^\circ C$ , 10Hz $\leq f \leq$ 100kHz $I_{OUT}=50mA$		-	80	-	$\mu V_{rms}$
Ripple Rejection Ratio	RR	1	$f=120Hz$ , 13.5V $\leq V_{IN} \leq$ 23.5V, $I_{OUT}=50mA$ , $T_j=25^\circ C$		55	72	-	dB
Dropout Voltage	$V_D$	1	$I_{OUT}=1.0A$ , $T_j=25^\circ C$		-	2.0	-	V
Short Circuit Current Limit	$I_{SC}$	1	$T_j=25^\circ C$		-	0.9	-	A
Average Temperature Coefficient of Output Voltage	$TC_{VO}$	1	$I_{OUT}=5mA$ , $0^\circ C \leq T_j \leq 125^\circ C$		-	-1.3	-	mV/°C

# KIA7805AF~KIA7824AF

---

KIA7812AF

ELECTRICAL CHARACTERISTICS ( $V_{IN}=19V$ ,  $I_{OUT}=500mA$ ,  $0^{\circ}C \leq T_j \leq 125^{\circ}C$ )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j=25^{\circ}C$ , $I_{OUT}=100mA$		11.5	12.0	12.5	V
Input Regulation	Reg line	1	$T_j=25^{\circ}C$	14.5V $\leq V_{IN} \leq$ 30V	-	10	240	mV
				16V $\leq V_{IN} \leq$ 22V	-	3	120	
Load Regulation	Reg load	1	$T_j=25^{\circ}C$	5mA $\leq I_{OUT} \leq$ 1.4A	-	12	240	mV
				250mA $\leq I_{OUT} \leq$ 750mA	-	4	120	
Output Voltage	$V_{OUT}$	1	14.5V $\leq V_{IN} \leq$ 27V 5.0mA $\leq I_{OUT} \leq$ 1.0A, $P_o \leq 15W$		11.4	-	12.6	V
Quiescent Current	$I_B$	1	$T_j=25^{\circ}C$ , $I_{OUT}=5mA$		-	4.3	8.0	mA
Quiescent Current Change	$\Delta I_B$	1	14.5V $\leq V_{IN} \leq$ 30V		-	-	1.0	mA
Output Noise Voltage	$V_{NO}$	1	$T_a=25^{\circ}C$ , 10Hz $\leq f \leq$ 100kHz $I_{OUT}=50mA$		-	90	-	$\mu V_{rms}$
Ripple Rejection Ratio	RR	1	$f=120Hz$ , 15V $\leq V_{IN} \leq$ 25V, $I_{OUT}=50mA$ , $T_j=25^{\circ}C$		55	71	-	dB
Dropout Voltage	$V_D$	1	$I_{OUT}=1.0A$ , $T_j=25^{\circ}C$		-	2.0	-	V
Short Circuit Current Limit	$I_{SC}$	1	$T_j=25^{\circ}C$		-	0.7	-	A
Average Temperature Coefficient of Output Voltage	$TC_{VO}$	1	$I_{OUT}=5mA$ , $0^{\circ}C \leq T_j \leq 125^{\circ}C$		-	-1.6	-	mV/ $^{\circ}C$

# KIA7805AF~KIA7824AF

---

KIA7815AF

ELECTRICAL CHARACTERISTICS ( $V_{IN}=23V$ ,  $I_{OUT}=500mA$ ,  $0^\circ C \leq T_j \leq 125^\circ C$ )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j=25^\circ C$ , $I_{OUT}=100mA$		14.4	15.0	15.6	V
Input Regulation	Reg line	1	$T_j=25^\circ C$	17.5V $\leq V_{IN} \leq$ 30V	-	11	300	mV
				20V $\leq V_{IN} \leq$ 26V	-	3	150	
Load Regulation	Reg load	1	$T_j=25^\circ C$	5mA $\leq I_{OUT} \leq$ 1.4A	-	12	300	mV
				250mA $\leq I_{OUT} \leq$ 750mA	-	4	150	
Output Voltage	$V_{OUT}$	1	17.5V $\leq V_{IN} \leq$ 30V 5.0mA $\leq I_{OUT} \leq$ 1.0A, $P_o \leq 15W$		14.25	-	15.75	V
Quiescent Current	$I_B$	1	$T_j=25^\circ C$ , $I_{OUT}=5mA$		-	4.4	8.0	mA
Quiescent Current Change	$\Delta I_B$	1	17.5V $\leq V_{IN} \leq$ 30V		-	-	1.0	mA
Output Noise Voltage	$V_{NO}$	1	$T_a=25^\circ C$ , 10Hz $\leq f \leq$ 100kHz $I_{OUT}=50mA$		-	110	-	$\mu V_{rms}$
Ripple Rejection Ratio	RR	1	$f=120Hz$ , 18.5V $\leq V_{IN} \leq$ 28.5V, $I_{OUT}=50mA$ , $T_j=25^\circ C$		54	70	-	dB
Dropout Voltage	$V_D$	1	$I_{OUT}=1.0A$ , $T_j=25^\circ C$		-	2.0	-	V
Short Circuit Current Limit	$I_{SC}$	1	$T_j=25^\circ C$		-	0.5	-	A
Average Temperature Coefficient of Output Voltage	$TC_{VO}$	1	$I_{OUT}=5mA$ , $0^\circ C \leq T_j \leq 125^\circ C$		-	-2.0	-	mV/°C

# KIA7805AF~KIA7824AF

---

KIA7818AF

ELECTRICAL CHARACTERISTICS ( $V_{IN}=27V$ ,  $I_{OUT}=500mA$ ,  $0^\circ C \leq T_j \leq 125^\circ C$ )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j=25^\circ C$ , $I_{OUT}=100mA$		17.3	18.0	18.7	V
Input Regulation	Reg line	1	$T_j=25^\circ C$	21V $\leq V_{IN} \leq$ 33V	-	13	360	mV
				24V $\leq V_{IN} \leq$ 30V	-	4	180	
Load Regulation	Reg load	1	$T_j=25^\circ C$	5mA $\leq I_{OUT} \leq$ 1.4A	-	12	360	mV
				250mA $\leq I_{OUT} \leq$ 750mA	-	4	180	
Output Voltage	$V_{OUT}$	1	21V $\leq V_{IN} \leq$ 33V 5.0mA $\leq I_{OUT} \leq$ 1.0A, $P_o \leq 15W$		17.1	-	18.9	V
Quiescent Current	$I_B$	1	$T_j=25^\circ C$ , $I_{OUT}=5mA$		-	4.5	8.0	mA
Quiescent Current Change	$\Delta I_B$	1	21V $\leq V_{IN} \leq$ 33V		-	-	1.0	mA
Output Noise Voltage	$V_{NO}$	1	$T_a=25^\circ C$ , 10Hz $\leq f \leq$ 100kHz $I_{OUT}=50mA$		-	125	-	$\mu V_{rms}$
Ripple Rejection Ratio	RR	1	$f=120Hz$ , 22V $\leq V_{IN} \leq$ 32V, $I_{OUT}=50mA$ , $T_j=25^\circ C$		52	68	-	dB
Dropout Voltage	$V_D$	1	$I_{OUT}=1.0A$ , $T_j=25^\circ C$		-	2.0	-	V
Short Circuit Current Limit	$I_{SC}$	1	$T_j=25^\circ C$		-	0.4	-	A
Average Temperature Coefficient of Output Voltage	$TC_{VO}$	1	$I_{OUT}=5mA$ , $0^\circ C \leq T_j \leq 125^\circ C$		-	-2.5	-	mV/°C

# KIA7805AF~KIA7824AF

---

KIA7820AF

ELECTRICAL CHARACTERISTICS ( $V_{IN}=29V$ ,  $I_{OUT}=500mA$ ,  $0^\circ C \leq T_j \leq 125^\circ C$ )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j=25^\circ C$ , $I_{OUT}=100mA$		19.2	20.0	20.8	V
Input Regulation	Reg line	1	$T_j=25^\circ C$	23V $\leq V_{IN} \leq$ 35V	-	15	400	mV
				26V $\leq V_{IN} \leq$ 32V	-	5	200	
Load Regulation	Reg load	1	$T_j=25^\circ C$	5mA $\leq I_{OUT} \leq$ 1.4A	-	12	400	mV
				250mA $\leq I_{OUT} \leq$ 750mA	-	4	200	
Output Voltage	$V_{OUT}$	1	23V $\leq V_{IN} \leq$ 35V 5.0mA $\leq I_{OUT} \leq$ 1.0A, $P_o \leq 15W$		19.0	-	21.0	V
Quiescent Current	$I_B$	1	$T_j=25^\circ C$ , $I_{OUT}=5mA$		-	4.6	8.0	mA
Quiescent Current Change	$\Delta I_B$	1	23V $\leq V_{IN} \leq$ 35V		-	-	1.0	mA
Output Noise Voltage	$V_{NO}$	1	$T_a=25^\circ C$ , 10Hz $\leq f \leq$ 100kHz $I_{OUT}=50mA$		-	135	-	$\mu V_{rms}$
Ripple Rejection Ratio	RR	1	$f=120Hz$ , 24V $\leq V_{IN} \leq$ 34V, $I_{OUT}=50mA$ , $T_j=25^\circ C$		50	66	-	dB
Dropout Voltage	$V_D$	1	$I_{OUT}=1.0A$ , $T_j=25^\circ C$		-	2.0	-	V
Short Circuit Current Limit	$I_{SC}$	1	$T_j=25^\circ C$		-	0.4	-	A
Average Temperature Coefficient of Output Voltage	$TC_{VO}$	1	$I_{OUT}=5mA$ , $0^\circ C \leq T_j \leq 125^\circ C$		-	-3.0	-	mV/°C

# KIA7805AF~KIA7824AF

---


KIA7824AF

ELECTRICAL CHARACTERISTICS ( $V_{IN}=33V$ ,  $I_{OUT}=500mA$ ,  $0^\circ C \leq T_j \leq 125^\circ C$ )

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT}$	1	$T_j=25^\circ C$ , $I_{OUT}=100mA$		23.0	24.0	25.0	V
Input Regulation	Reg line	1	$T_j=25^\circ C$	27V $\leq V_{IN} \leq$ 38V	-	18	480	mV
				30V $\leq V_{IN} \leq$ 36V	-	6	240	
Load Regulation	Reg load	1	$T_j=25^\circ C$	5mA $\leq I_{OUT} \leq$ 1.4A	-	12	480	mV
				250mA $\leq I_{OUT} \leq$ 750mA	-	4	240	
Output Voltage	$V_{OUT}$	1	27V $\leq V_{IN} \leq$ 38V 5.0mA $\leq I_{OUT} \leq$ 1.0A, $P_o \leq 15W$		22.8	-	25.2	V
Quiescent Current	$I_B$	1	$T_j=25^\circ C$ , $I_{OUT}=5mA$		-	4.6	8.0	mA
Quiescent Current Change	$\Delta I_B$	1	27V $\leq V_{IN} \leq$ 38V		-	-	1.0	mA
Output Noise Voltage	$V_{NO}$	1	$T_a=25^\circ C$ , 10Hz $\leq f \leq$ 100kHz $I_{OUT}=50mA$		-	150	-	$\mu V_{rms}$
Ripple Rejection Ratio	RR	1	$f=120Hz$ , 28V $\leq V_{IN} \leq$ 38V, $I_{OUT}=50mA$ , $T_j=25^\circ C$		50	66	-	dB
Dropout Voltage	$V_D$	1	$I_{OUT}=1.0A$ , $T_j=25^\circ C$		-	2.0	-	V
Short Circuit Current Limit	$I_{SC}$	1	$T_j=25^\circ C$		-	0.3	-	A
Average Temperature Coefficient of Output Voltage	$TC_{VO}$	1	$I_{OUT}=5mA$ , $0^\circ C \leq T_j \leq 125^\circ C$		-	-3.5	-	mV/°C


# KIA7805AF~KIA7824AF

## TEST CIRCUIT1/STANDARD APPLICATION CIRCUIT

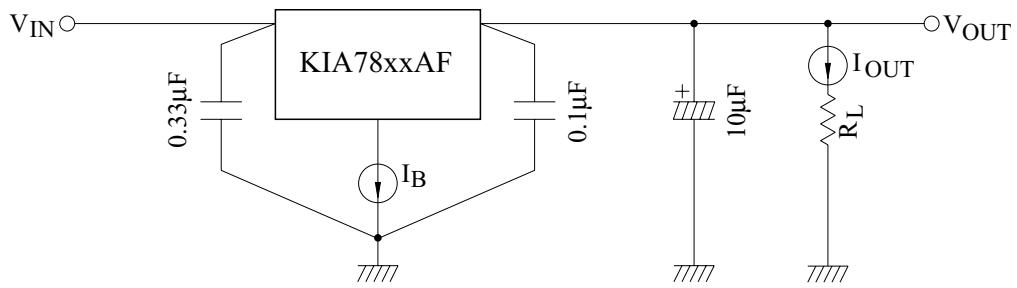


## TEST CIRCUIT

1. V<sub>OUT</sub>, Reg · line , Reg · load , V<sub>OUT</sub>, I<sub>B</sub> , ΔI<sub>B</sub> , V<sub>NO</sub> , ΔV<sub>OUT</sub>/Δt , |V<sub>IN</sub> - V<sub>OUT</sub>| , TC<sub>VO</sub>

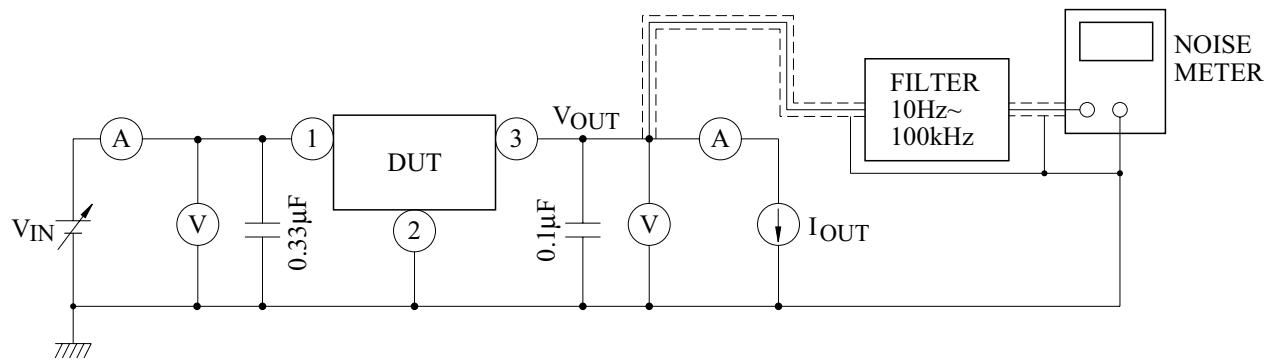

2. RR

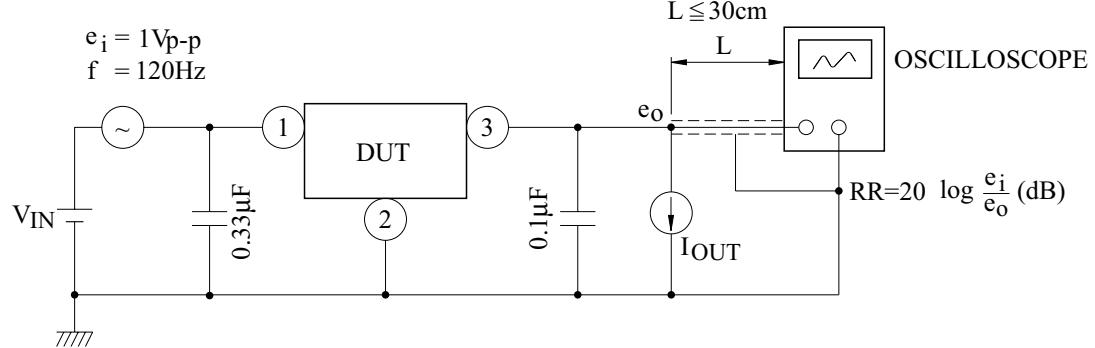


# KIA7805AF~KIA7824AF


## APPLICATION CIRCUIT

### (1) VOLTAGE BOOST REGULATOR


#### (a) Voltage boost by use of zener diode

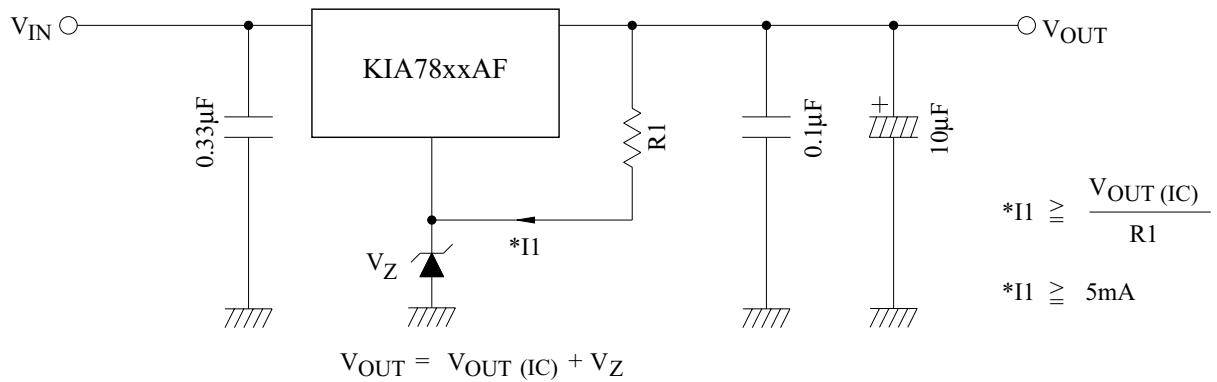

#### (b) Voltage boost by use of resistor

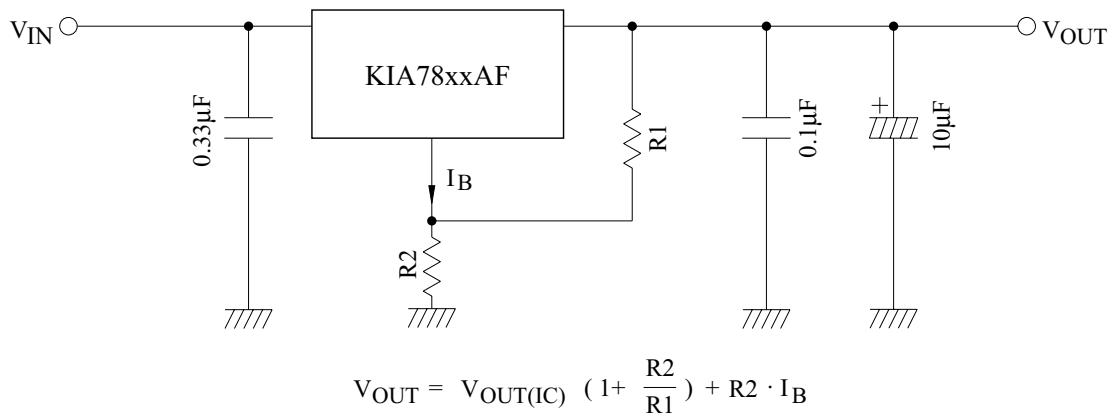


#### (c) Adjustable output regulator

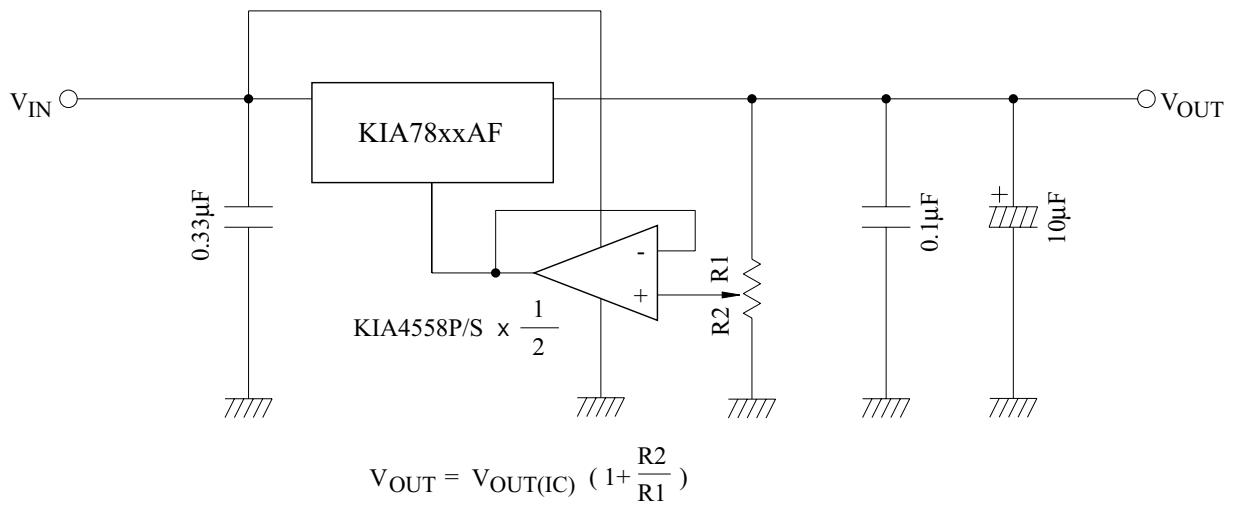


# KIA7805AF~KIA7824AF

## (2) CURRENT BOOST REGULATOR

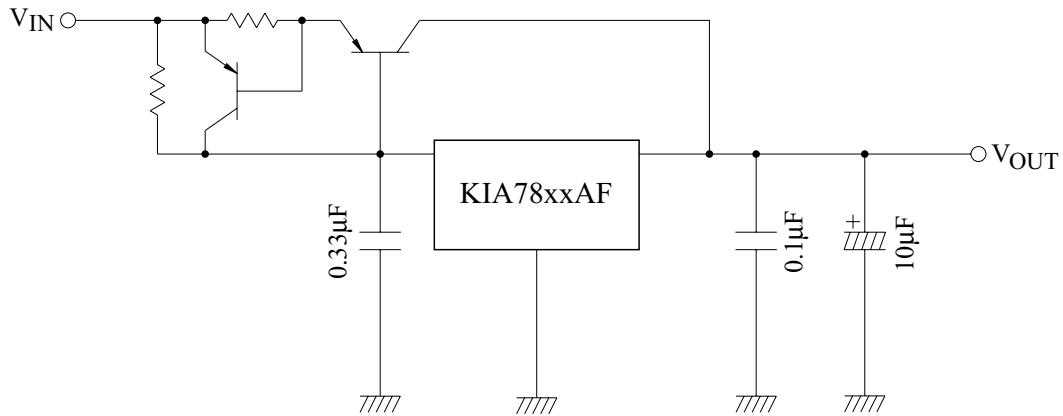


## PRECAUTIONS ON APPLICATION

- (1) In regard to GND, be careful not to apply a negative voltage to the input/output terminal. Further, special care is necessary in case of a voltage boost application.
- (2) When a surge voltage exceeding maximum rating is applied to the input terminal or when a voltage in excess of the input terminal voltage is applied to the output terminal, the circuit may be destroyed. Specially, in the latter case, great care is necessary. Further, if the input terminal shorts to GND in a state of normal operation, the output terminal voltage becomes higher than the input voltage (GND potential), and the electric charge of a chemical capacitor connected to the output terminal flows into the input side, which may cause the destruction of circuit. In these cases, take such steps as a zener diode and a general silicon diode are connected to the circuit, as shown in the following figure.

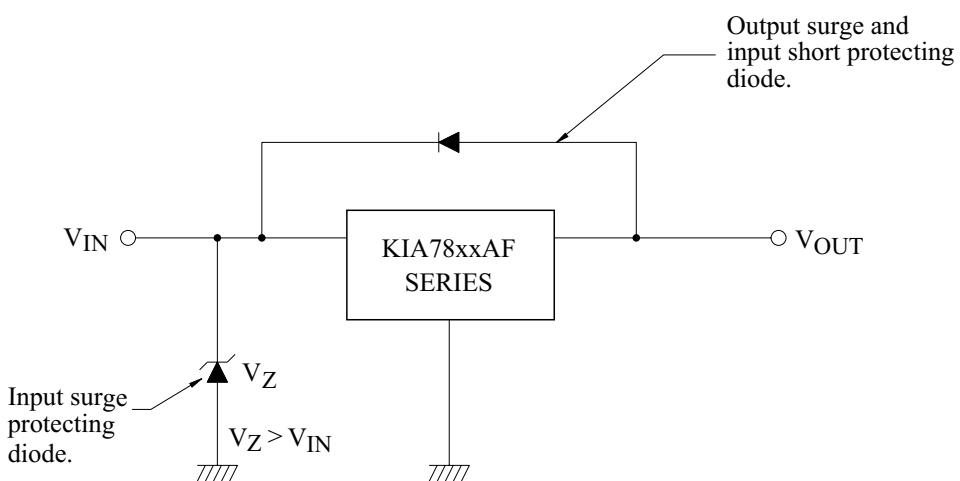

- (3) When the input voltage is too high, the power dissipation of three terminal regulator increase because of series regulator, so that the junction temperature rises. In such a case, it is recommended to reduce the power dissipation by inserting the power limiting resistor  $R_{SD}$  in the input terminal, and to reduce the junction temperature as a result.

# KIA7805AF~KIA7824AF

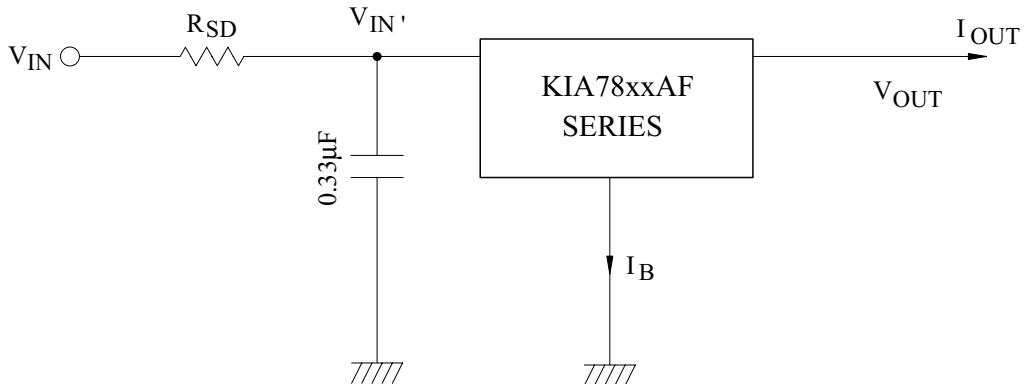

The power dissipation  $P_D$  of IC is expressed in the following equation.

$$P_D = (V_{IN'} - V_{OUT}) \cdot I_{OUT} + V_{IN'} \cdot I_B$$

If  $V_{IN'}$  is reduced below the lowest voltage necessary for the IC, the parasitic oscillation will be caused according to circumstances.

In determining the resistance value of  $R_{SD}$ , design with margin should be made by making reference to the following equation.

$$R_{SD} < \frac{V_{IN} - V_{IN'}}{I_{OUT} + I_B}$$

(4) Connect the input terminal and GND, and the output terminal and GND, by capacitor respectively.

The capacitances should be determined experimentally because they depend on printed patterns. In particular, adequate investigation should be made so that there is no problem even at time of high or low temperature.

(5) Installation of IC for power supply

For obtaining high reliability on the heat sink design of the regulator IC, it is generally required to derate more than 20% of maximum junction temperature ( $T_j$  MAX.) Further, full consideration should be given to the installation of IC to the heat sink.

(6) IEC (International Electronical Commission)-65 Specification.

(a) IEC (International Electronical Commission)-65 is the standard, parts testing method, machinery and tolls (used in connecting main power directly and indirectly) Which are used at home and general building. The purpose of the above standard is not to breaking out the risk which is related to an electric shock, a heating, a fire and the damage of surrounding parts in the case of normal or abnormal operating.

(b) In case temperature is limited by temperature overheating prevention device, fuse or the operation of fuse resistor

One must calculate the temperature of PCB substrate in 2 minute.


$\Delta T \leq 110^\circ\text{C}$  regulated

$\Delta T = T$  (The PCB substrate temperature in 2 minute)


-Ta(Ambient temperature)

(c) Graph

As the territory of the deviant line appear by the heat, as the area is wider,  $T$  (The PCB substrate temperature in 2 minute) is becoming high.

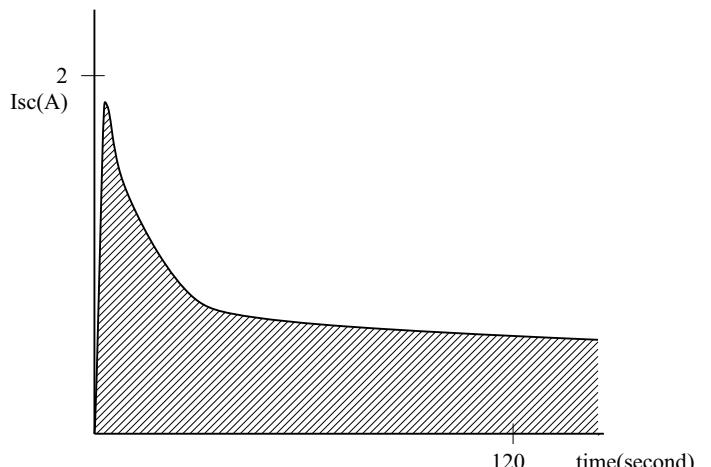

# KIA7805AF~KIA7824AF

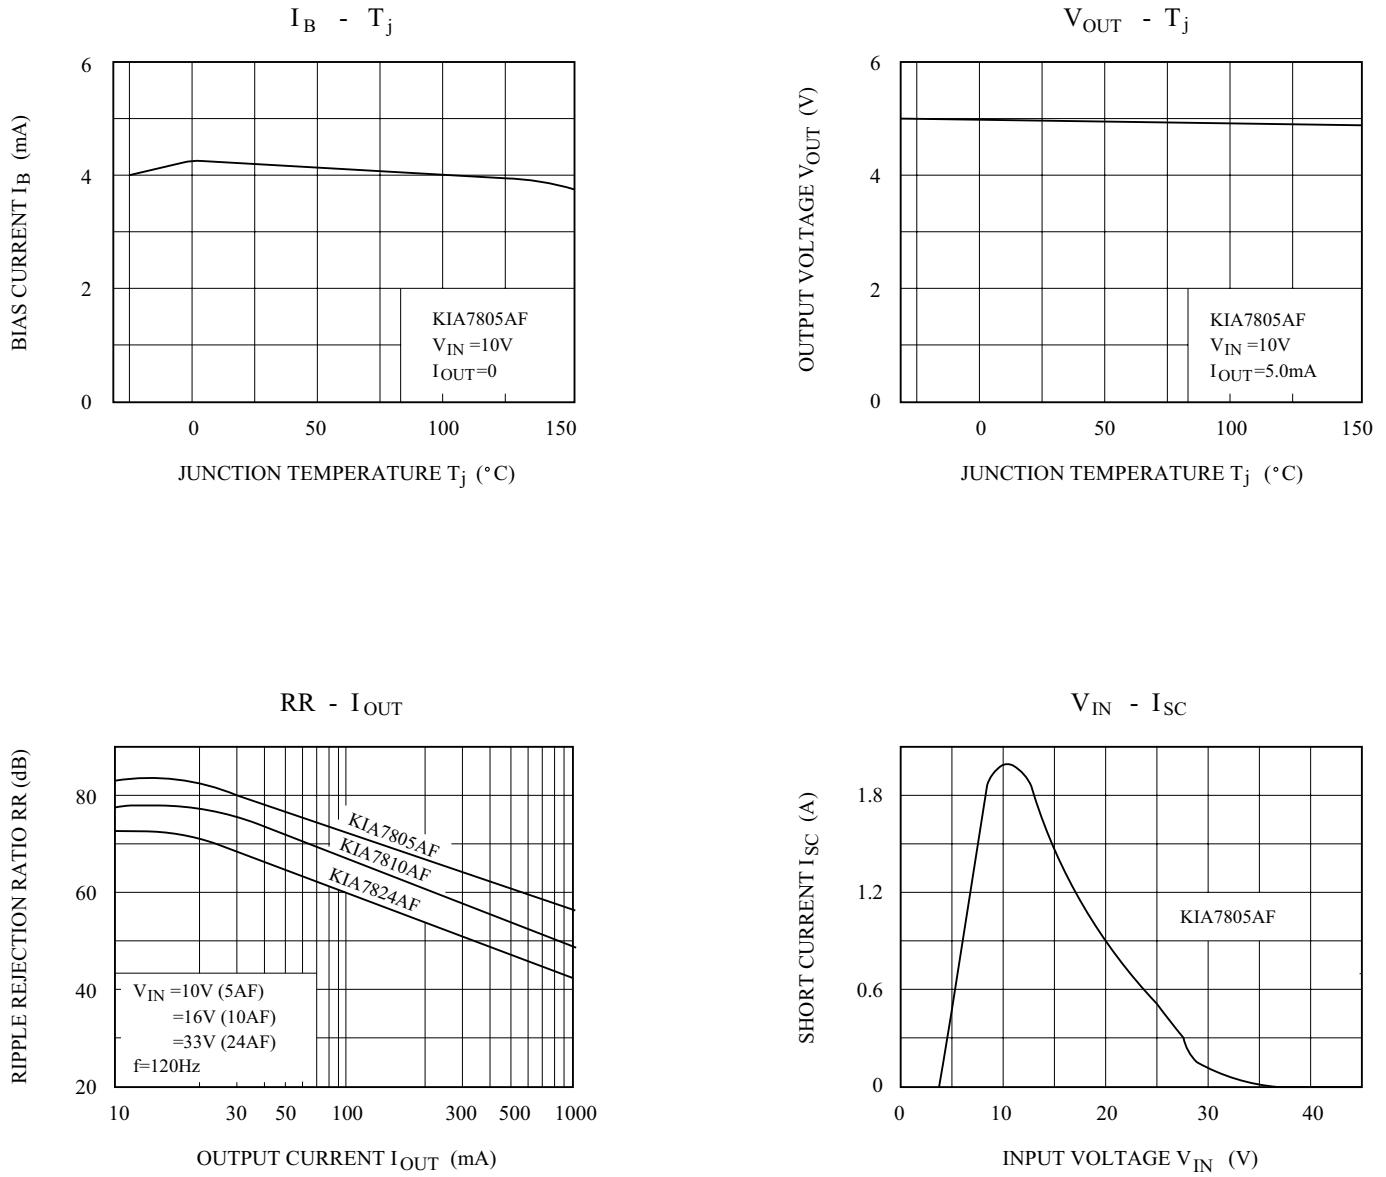

# KIA7805AF~KIA7824AF

