

8961726 TEXAS INSTR (OPT0)

62C 36982 D


TIP660, TIP661, TIP662
N-P-N DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS

REVISED OCTOBER 1984


T-33-29

- 80 W at 100° C Case Temperature
- 10 A Rated Continuous Collector Current
- MAX $V_{CE(sat)}$ of 2.8 V at 6.5 A
- High-Voltage, High Forward and Reverse Energy
- Designed For Automotive Ignition Applications
- Characterized For Operation In Ignition and Switching Regulator Applications

device schematic



TO-3 PACKAGE

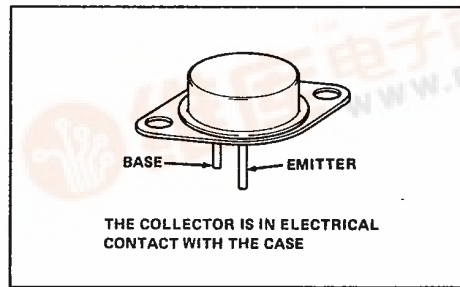

THE COLLECTOR IS IN ELECTRICAL CONTACT WITH THE CASE

absolute maximum ratings at 25° C case temperature (unless otherwise noted)

| | TIP660 | TIP661 | TIP662 |
|---|-------------------|--------|--------|
| Collector-base voltage | 320 V | 350 V | 380 V |
| Collector-emitter voltage ($I_B = 0$) | 320 V | 350 V | 380 V |
| Emitter-base voltage | 5 V | | |
| Continuous collector current | 10 V | | |
| Peak collector current (see Note 1) | 15 A | | |
| Commutating diode current (see Note 2) | 10 A | | |
| Continuous base current | 1 A | | |
| Continuous device dissipation at (or below) 100° C case temperature (see Note 3) | 80 W | | |
| Continuous device dissipation at (or below) 25° C free-air temperature (see Note 4) | 5.5 W | | |
| Safe operating area at (or below) 100° C case temperature | See Figure 9 | | |
| Operating collector junction and storage temperature range | - 65° C to 200° C | | |
| Lead temperature 3,2 mm (0.125 inch) from case for 10 seconds | 300° C | | |

- NOTES:
1. This value applies for $t_W \leq 10$ ms, duty cycle ≤ 10 %.
 2. This applies to the total collector terminal current when the collector is at negative potential with respect to the emitter.
 3. Derate linearly to 200° C case temperature at the rate of 0.8 W/C or refer to Dissipation Derating Curve, Figure 10.
 4. Derate linearly to 200° C free-air temperature at the rate of 31.4 mW/C or refer to Dissipation Derating Curve, Figure 11.

5
TIP Devices

TEXAS
INSTRUMENTS

POST OFFICE BOX 225012 • DALLAS, TEXAS 75265

5-241



8961726 TEXAS INSTR (OPTO)

62C 36983 D

TIP660, TIP661, TIP662
N-P-N DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS

T-33-29

electrical characteristics at 25°C case temperature

| PARAMETER | TEST CONDITIONS | TIP660 | | | TIP661 | | | TIP662 | | | UNIT |
|----------------------|--|--------|-----|-----|--------|-----|-----|--------|-----|-----|------|
| | | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | |
| I _{CEO} | V _{CE} = 320 V, I _B = 0 | | | 1 | | | 1 | | | | mA |
| | V _{CE} = 350 V, I _B = 0 | | | | | | | | | | |
| | V _{CE} = 380 V, I _B = 0 | | | | | | | | 1 | | |
| I _{EBO} | V _{EB} = 5 V, I _C = 0 | | | 100 | | | 100 | | | 100 | mA |
| h _{FE} | V _{CE} = 2.2 V, I _C = 4 A, See Notes 5 and 6 | 200 | | | 200 | | | 200 | | | |
| V _{BE} | I _B = 0.1 A, I _C = 6.5 A, See Notes 5 and 6 | | 2.2 | | 2.2 | | | 2.2 | | | V |
| V _{CE(sat)} | I _B = 0.1 A, I _C = 6.5 A, See Notes 5 and 6 | | 2.8 | | 2.8 | | | 2.8 | | | V |
| | I _B = 1 A, I _C = 10 A, See Notes 5 and 6 | | 2.9 | | 2.9 | | | 2.9 | | | |
| V _F | I _F = 10 A, See Notes 5 and 6 | | 3.5 | | 3.5 | | | 3.5 | | | V |

NOTES: 5. These parameters must be measured using pulse techniques, t_w = 300 μs, duty cycle ≤ 2 %.
6. These parameters are measured with voltage-sensing contacts separate from the current-carrying contacts located within 3.2 mm (0.125 inch) from the device body.

thermal characteristics

| PARAMETER | MIN | TYP | MAX | UNIT |
|-------------------|------------|-----|------|------|
| R _{θJC} | | | 1.25 | °C/W |
| R _{θJA} | | | 31.8 | |
| R _{θCHS} | See Note 7 | | 0.4 | |

NOTE 7: This parameter is measured using a 0.08 mm mica insulator with Dow-Corning 11 compound on both sides of the insulator, a 6-32 mounting screw with bushing, and a mounting torque of 0.9 Newton meter.

resistive-load switching characteristics at 25°C case temperature

| PARAMETER | TEST CONDITIONS ¹ | MIN | TYP | MAX | UNIT |
|----------------|---|-----|------|-----|------|
| t _d | I _C = 6.5 A, I _{B1} = 100 mA, I _{B2} = -100 mA, V _{BE(off)} = -5 V, R _L = 5 Ω, See Figure 1 | | 0.04 | | μs |
| t _r | | | 1.5 | | |
| t _s | | | 2.2 | | |
| t _f | | | 2.6 | | |

¹ Voltage and current values shown are nominal; exact values vary slightly with transistor parameters.

functional tests at 25°C free-air temperature

| TEST | CONDITIONS | LEVEL |
|--|--|----------|
| Power (V _{CE} * I _C) | V _{CE} = 40 V, I _C = 2 A, t _{test} = 1 s | 80 W |
| Reverse Pulse Energy ($\frac{I_C^2 L}{2}$) | I _{CM} = 6 A, L = 100 mH, f = 10 Hz, t _{test} = 0.5 s, See Figure 2 | 1.8 mJ |
| Forward Pulse Energy ($\frac{I_C^2 L}{2}$) | I _{CM} = 7 A, L = 5 mH, V _{clamp} = V _{CEO} max rating, f = 60 Hz, t _{test} = 0.5 s, See Figure 3 | 122.5 mJ |

TIP Devices


8961726 TEXAS INSTR (OPTO)

62C 36984 D


TIP660, TIP661, TIP662
N-P-N DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS

PARAMETER MEASUREMENT INFORMATION

T-33-29

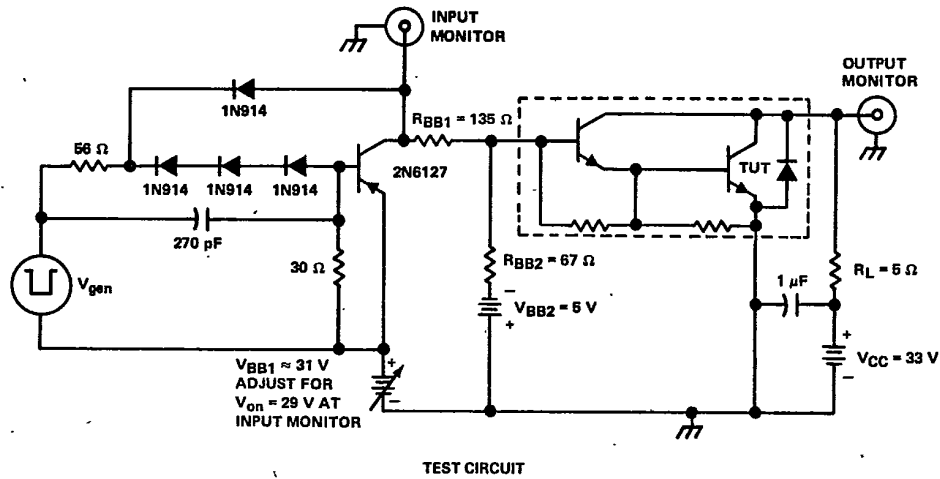

TEST CIRCUIT

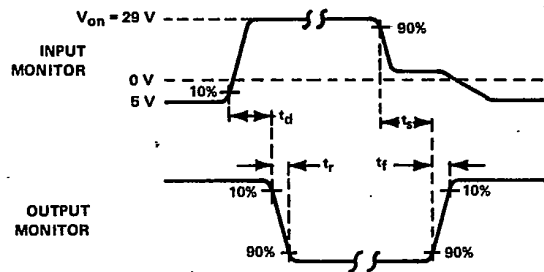

VOLTAGE WAVEFORMS

- NOTES: A. V_{gen} is a -30-V pulse into a $50\ \Omega$ termination.
 B. The V_{gen} waveform is supplied by a generator with the following characteristics: $t_r < 15\text{ ns}$, $t_f < 15\text{ ns}$, $Z_{out} = 50\ \Omega$, $t_w = 20\ \mu\text{s}$, duty cycle $< 2\%$.
 C. Waveforms are monitored on an oscilloscope with the following characteristics: $t_r < 15\text{ ns}$, $R_{in} > 10\text{ M}\Omega$, $C_{in} < 11.5\text{ pF}$.
 D. Resistors must be noninductive types.
 E. The d-c power supplies may require additional bypassing in order to minimize ringing.

FIGURE 1. RESISTIVE-LOAD SWITCHING

5
TIP Devices


8961726 TEXAS INSTR (OPTO)

62C 36985 D


TIP660, TIP661, TIP662
N-P-N DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS

T-33-29

FUNCTIONAL TEST INFORMATION

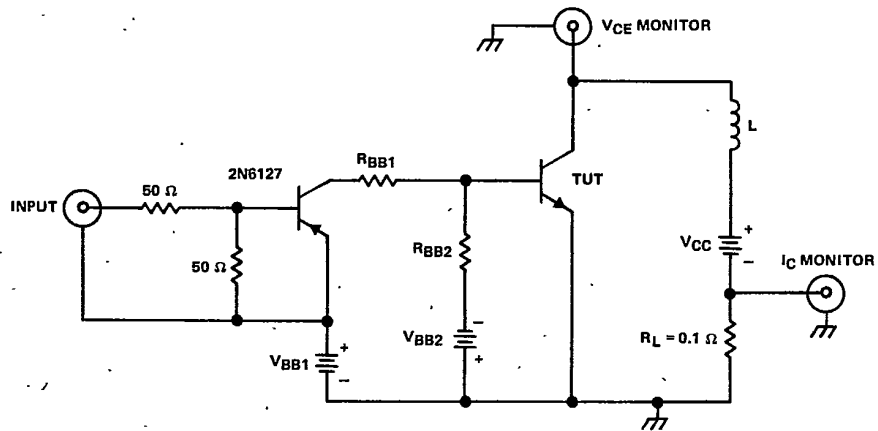

TEST CIRCUIT

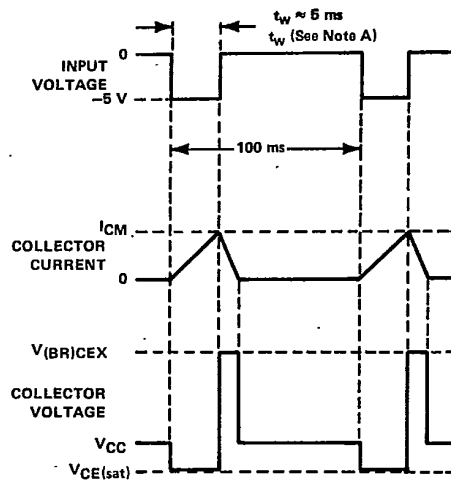

VOLTAGE AND CURRENT WAVEFORMS

NOTE A: Input pulse duration is increased until the peak collector current reaches the specified value of I_{CM} .

FIGURE 2. REVERSE PULSE ENERGY TEST

TIP Devices


8961726 TEXAS INSTR (OPTO)

62C 36986 D


TIP660, TIP661, TIP662
N-P-N DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS

FUNCTIONAL TEST INFORMATION

T-33-29

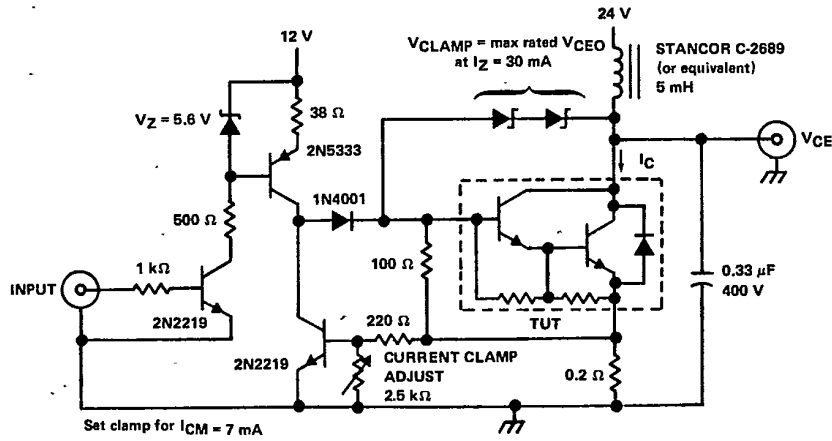

TEST CIRCUIT

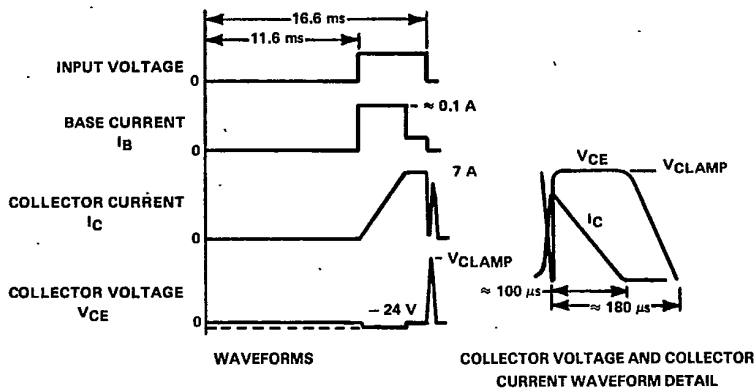

- NOTES: A. Base and collector currents are measured using current probes such as Tektronix types P6019, P6020, P6021, P6042 or the equivalent.
B. Waveforms are monitored on an oscilloscope with the following characteristics: $t_r \leq 20$ ns, $R_{in} \geq 10$ MΩ, $C_{in} \leq 11.5$ pF.

FIGURE 3. FORWARD PULSE ENERGY TEST



TIP Devices

8961726 TEXAS INSTR (OPTO)

62C 36987 D

T-33-29

**TIP660, TIP661, TIP662
N-P-N DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS**

TYPICAL CHARACTERISTICS

**STATIC FORWARD CURRENT TRANSFER RATIO
vs
COLLECTOR CURRENT**

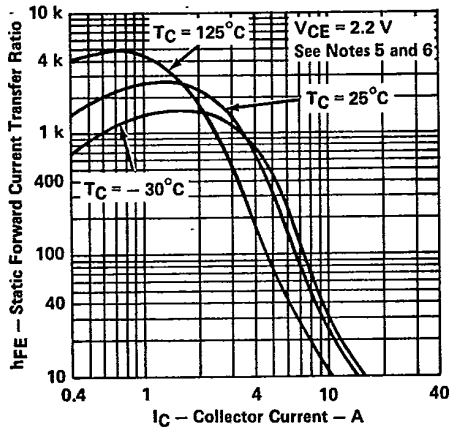


FIGURE 4

**BASE-EMITTER VOLTAGE
vs
COLLECTOR CURRENT**

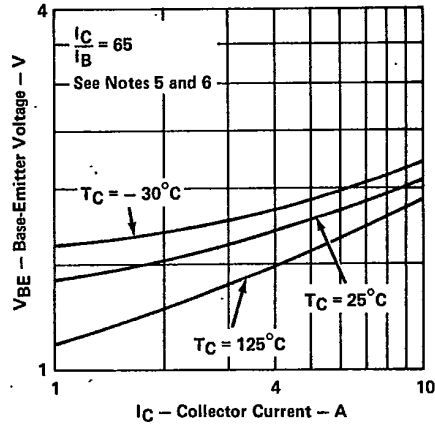


FIGURE 5

**BASE-EMITTER VOLTAGE
vs
COLLECTOR CURRENT**

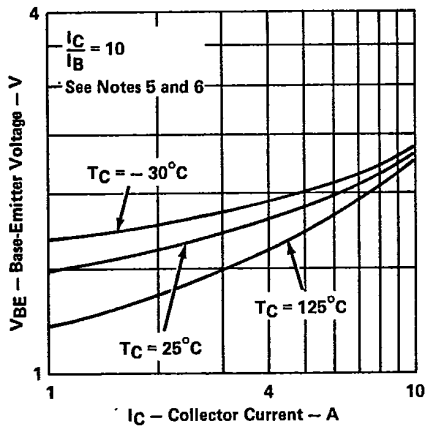


FIGURE 6

**COLLECTOR-EMITTER SATURATION VOLTAGE
vs
COLLECTOR CURRENT**

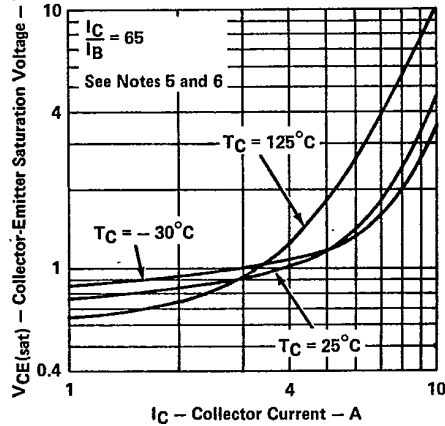


FIGURE 7

- NOTES: 5. These parameters must be measured using pulse techniques, $t_W = 300 \mu s$, duty cycle $\leq 2\%$.
6. These parameters are measured with voltage-sensing contacts separate from the current-carrying contacts located within 3.2 mm (0.125 inch) from the device body.



TIP Devices

8961726 TEXAS INSTR (OPTO)

62C 36988 D

TIP660, TIP661, TIP662
N-P-N DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS

TYPICAL CHARACTERISTICS

T-33-29

COLLECTOR-EMITTER SATURATION VOLTAGE
vs
COLLECTOR CURRENT

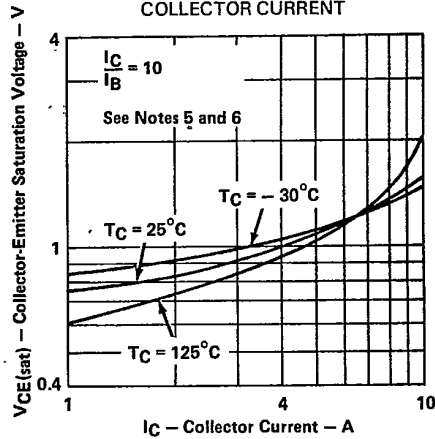


FIGURE 8

- NOTES: 5. These parameters must be measured using pulse techniques, $t_w = 300 \mu\text{s}$, duty cycle $\leq 2\%$.
6. These parameters are measured with voltage-sensing contacts separate from the current-carrying contacts located within 3,2 mm (0.125 inch) from the device body.

MAXIMUM SAFE OPERATING AREA
FORWARD-BIAS SAFE OPERATING AREA

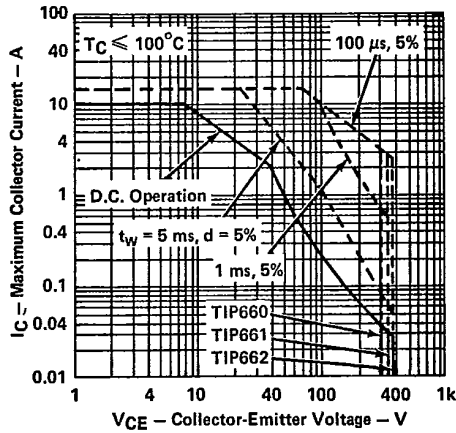


FIGURE 9



TIP Devices

8961726 TEXAS INSTR (OPTO)

62C 36989 D
T-33-29

TIP660, TIP661, TIP662
N-P-N DARLINGTON-CONNECTED
SILICON POWER TRANSISTORS

THERMAL INFORMATION

CASE TEMPERATURE
DISSIPATION DERATING CURVE

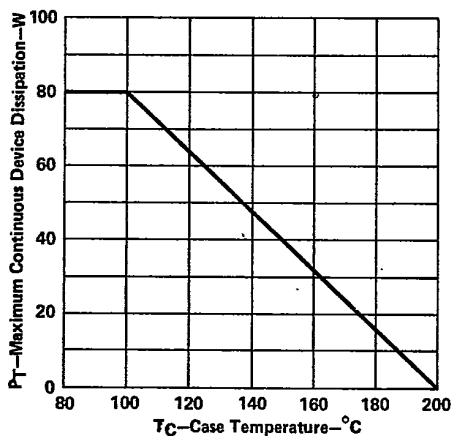


FIGURE 10

FREE-AIR TEMPERATURE
DISSIPATION DERATING CURVE

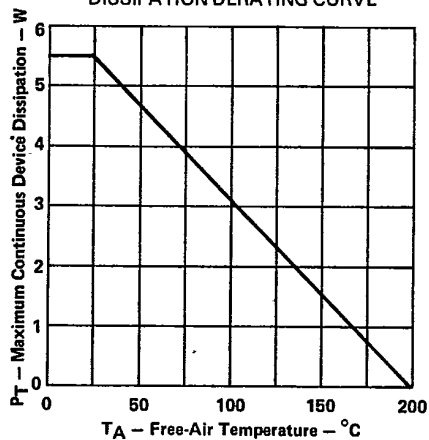


FIGURE 11



TIP Devices