


A SIEBE COMPANY

1801 HURD DRIVE  
IRVING, TEXAS 75038-4385  
PHONE 214/580-1515  
FAX 214/550-1309

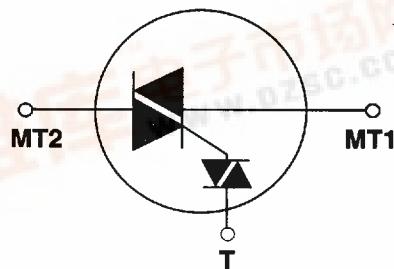

# QUADRACs

## INTERNALY TRIGGERED TRIACS — (4-15 AMPS)

### GENERAL DESCRIPTION

Teccor's QUADRAC is a triac that includes a diac trigger mounted inside the same package. This device, developed by Teccor, saves the user the expense and assembly time of buying a discrete diac and assembling in conjunction with a gated triac.

The QUADRAC® is a bidirectional AC switch and is gate controlled for either polarity of main terminal voltage. Its primary purpose is for AC switching and phase control applications such as speed controls, temperature modulation controls, and lighting controls.

Triac current capacities range from 4 to 15 Amperes with voltage ranges from 200-600 Volts. QUADRACs® are available in the TO-220AB package as shown above.

The Thermotab package is electrically isolated to 2,500 V (RMS) from the leads to mounting surface. 4,000 V (RMS) available on special order. This means that no external isolation is required, thus eliminating the need for separate insulators and insulator-mounting steps ... saving dollars over "hot tab" devices.

All Teccor triac and diac chips have glass-passivated junctions to ensure long term device reliability and parameter stability.

Variations of devices in this data sheet are available for custom design applications. Please consult the factory for more information.

### Features

- Glass-passivated junctions
- Electrically-isolated package
- Internal trigger diac
- High surge capacity — up to 200 amps
- High voltage capability — 200 up to 600 volts

# Electrical Specifications

T(RMS)	Part No.	V <sub>DRM</sub>	I <sub>DRM</sub>	V <sub>TM</sub>	Trigger Diac Specifications (T-MT1)							
					Isolated	ΔV <sub>BO</sub>	V <sub>BO</sub>	[AV±]	I <sub>BO</sub>	C <sub>T</sub>		
RMS On-State Current Conduction Angle of 360° (5)	 MT1 MT2 T THERMOTAB TO-220AB	Repetitive Peak Blocking Voltage (1)	Peak Off-State Current Gate Open V <sub>DRM</sub> = Max Rated Value (1) (10) mAmps	Peak On-State Voltage at Max Rated RMS Current T <sub>C</sub> = 25°C (1) (3)	Breakover Voltage Symmetry (7)	Breakover Voltage (Forward & Reverse) (6)	Dynamic Breakback Voltage (Forward & Reverse) (6)	Peak Breakover Current	Trigger Firing Capacitance			
		Volts	T <sub>C</sub> = 25°C T <sub>C</sub> = 100°C T <sub>C</sub> = 125°C	Volts	Volts	Volts	Volts	μAmps	μFarads			
For Package Dimensions & Variations, See Pg.101.		MIN	MAX		MAX	MAX	MIN	MAX	MAX	MAX		
<b>4.0 Amps</b>	Q2004LT	200	.05	0.5	2.0	1.6	3	33	43	5	200	0.1
	Q4004LT	400	.05	0.5	2.0	1.6	3	33	43	5	200	0.1
	Q5004LT	500	.05	0.5	2.0	1.6	3	33	43	5	200	0.1
	Q6004LT	600	.05	0.5	2.0	1.6	3	33	43	5	200	0.1
<b>6.0 Amps</b>	Q2006LT	200	.05	0.5	2.0	1.6	3	33	43	5	200	0.1
	Q4006LT	400	.05	0.5	2.0	1.6	3	33	43	5	200	0.1
	Q5006LT	500	.05	0.5	2.0	1.6	3	33	43	5	200	0.1
	Q6006LT	600	.05	0.5	2.0	1.6	3	33	43	5	200	0.1
<b>8.0 Amps</b>	Q2008LT	200	.05	0.5	2.0	1.6	3	33	43	5	200	0.1
	Q4008LT	400	.05	0.5	2.0	1.6	3	33	43	5	200	0.1
	Q5008LT	500	.05	0.5	2.0	1.6	3	33	43	5	200	0.1
	Q6008LT	600	.05	0.5	2.0	1.6	3	33	43	5	200	0.1
<b>10.0 Amps</b>	Q2010LT	200	.05	0.5	2.0	1.6	3	33	43	5	200	0.1
	Q4010LT	400	.05	0.5	2.0	1.6	3	33	43	5	200	0.1
	Q5010LT	500	.05	0.5	2.0	1.6	3	33	43	5	200	0.1
	Q6010LT	600	.05	0.5	2.0	1.6	3	33	43	5	200	0.1
<b>15.0 Amps</b>	Q2015LT	200	.05	0.5	2.0	1.6	3	33	43	5	200	0.1
	Q4015LT	400	.05	0.5	2.0	1.6	3	33	43	5	200	0.1
	Q5015LT	500	.05	0.5	2.0	1.6	3	33	43	5	200	0.1
	Q6015LT	600	.05	0.5	2.0	1.6	3	33	43	5	200	0.1

## GENERAL NOTES

- All measurements are made at 60 Hz with resistive load at an ambient temperature of +25°C unless otherwise specified.
- Operating temperature range (T<sub>J</sub>) is -40°C to +125°C.
- Storage temperature range (T<sub>S</sub>) is -40°C to +125°C.
- Lead solder temperature is a maximum of +230°C for 10 seconds maximum; ≥ 1/16" (1.59mm) from case.
- The case temperature (T<sub>C</sub>) is measured as shown on dimensional outline drawings. See "Package dimensions" section on Page 101.

## ELECTRICAL ISOLATION

All Teccor isolated QUADRAc packages will withstand a minimum high potential test of 2500VAC (RMS) from leads to mounting tab over the operating temperature range of the device. See isolation table for standard and optional isolation ratings.

THERMAL RESISTANCE (STEADY STATE) R <sub>θJC</sub> [R <sub>θJA(TYP)</sub> ] °C/WATT	
TYPE	ISOLATED TO-220AB
4.0 amps	3.6 [50]
6.0 amps	3.3
8.0 amps	2.8
10.0 amps	2.6
15.0 amps	2.1

ELECTRICAL ISOLATION FROM LEADS TO MOUNTING TAB U.L. RECOGNIZED FILE #E71639	
TYPE	
VAC(RMS)	
2500	STANDARD
4000	OPTIONAL*

\* FOR 4000 V ISOLATION USE "V" SUFFIX

# QUADRACS

$I_H$	$I_{TSM}$	$dv/dt(c)$	$dv/dt$	$t_{gt}$	$I^2t$	$I_{GTM}$	$di/dt$
Holding Current Gate Open (1) (2)  mAmps	Peak One Cycle Surge (4) (8)  Amps	Critical Rate-of-Rise of Commutation Voltage at Rated $V_{DRM}$ and $I_T(RMS)$ Commutating $di/dt = 0.54$ Rated $I_T(RMS)/ms$ Gate Unenergized (1) (5) (8)  Volts/ $\mu$ Sec	Critical Rate-of- Rise of Off-State Voltage at Rated $V_{DRM}$ Gate Open (1)  Volts/ $\mu$ Sec	Gate Controlled Turn- On Time (6) (9)  $\mu$ Sec	RMS Surge (Non-Repetitive) On-State Current for period of 8.3ms for Fusing  Amps $^2$ Sec	Peak Gate Trigger Current (10 $\mu$ s Max)  Amps	Maximum Rate-of-Change of On-State Current (9)  Amps/ $\mu$ Sec
MAX	60Hz	50Hz	MIN	MIN	TYP		
40	55	46	3	75	50	3	12.5
40	55	46	3	75	50	3	12.5
40	55	46	3	50	50	3	12.5
40	55	46	3	50	50	3	12.5
50	80	65	4	150	100	3	26.5
50	80	65	4	150	100	3	26.5
50	80	65	4	125	85	3	26.5
50	80	65	4	125	85	3	26.5
60	100	83	4	175	120	3	41
60	100	83	4	175	120	3	41
60	100	83	4	150	100	3	41
60	100	83	4	150	100	3	41
60	120	100	4	200	150	3	60
60	120	100	4	200	150	3	60
60	120	100	4	175	120	3	60
60	120	100	4	175	120	3	60
70	200	167	4	300	200	3	166
70	200	167	4	300	200	3	166
70	200	167	4	200	150	3	166
70	200	167	4	200	150	3	166

## NOTES TO ELECTRICAL SPECIFICATIONS

- For either polarity of MT2 with reference to MT1.
- See Figure 1 for  $I_H$  vs  $T_C$ .
- See Figure 3A & 3B for  $i_T$  vs  $v_T$ .
- See Figure 6 for surge ratings with specific durations.
- See Figures 4, 5A & 5B for current rating at specific operating temperature.
- See Figure 2A & 2B for test circuit.
- $\Delta V_{ao} = [+V_{ao}] - [-V_{ao}]$
- See Figures 5A & 5B for maximum allowable case temperature at maximum rated current.
- Trigger firing capacitance =  $0.1\mu F$  with  $0.1\mu s$  rise time.
- $T_C = T_J$  for test conditions in off-state.

Figure 1 — Normalized DC Holding Current vs Case Temperature

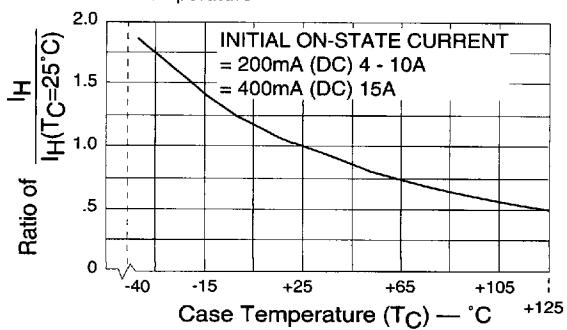


Figure 2A — Test Circuit


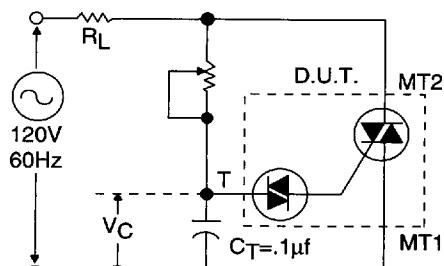


Figure 2B — Test Circuit Waveforms

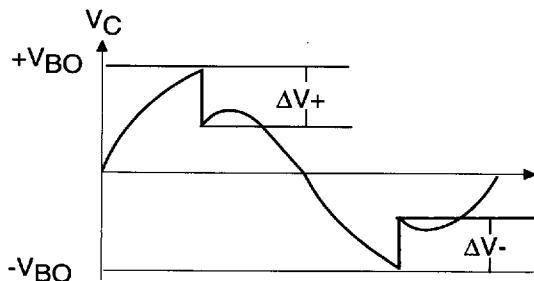

# Electrical Specifications

Figure 3A — On-State Current vs On-State Voltage (Typical)

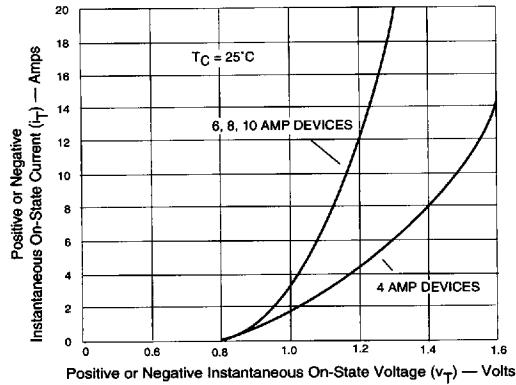


Figure 3B — On-State Current vs On-State Voltage (Typical)

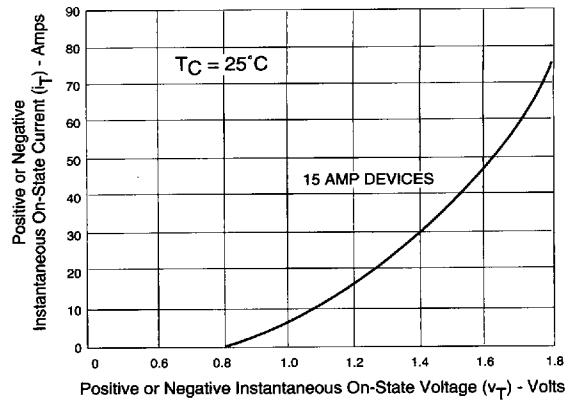


Figure 4 — Maximum Allowable Ambient Temperature vs. On-State Current

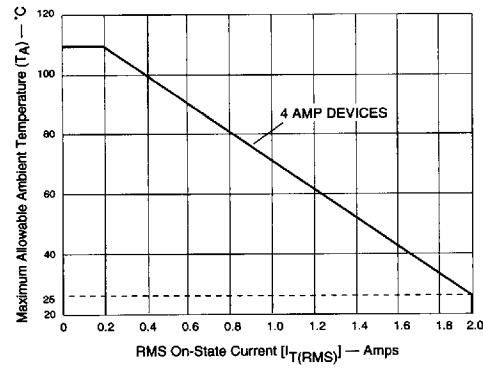


Figure 5A — Maximum Allowable Case Temperature vs. On-State Current

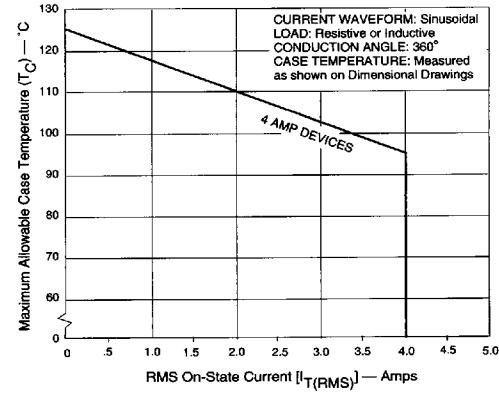


Figure 5B — Maximum Allowable Case Temperature vs. On-State Current


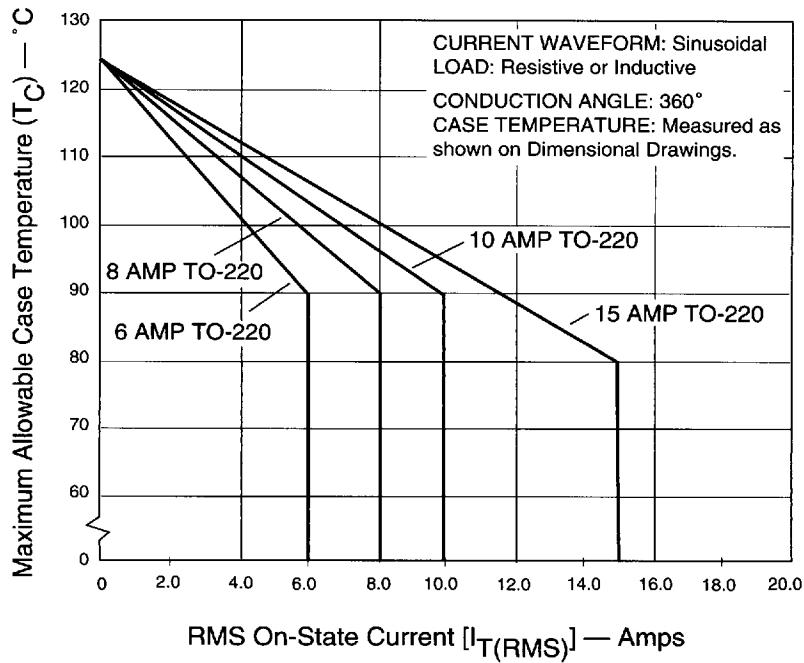


Figure 6 — Peak Surge Current vs. Surge Current Duration

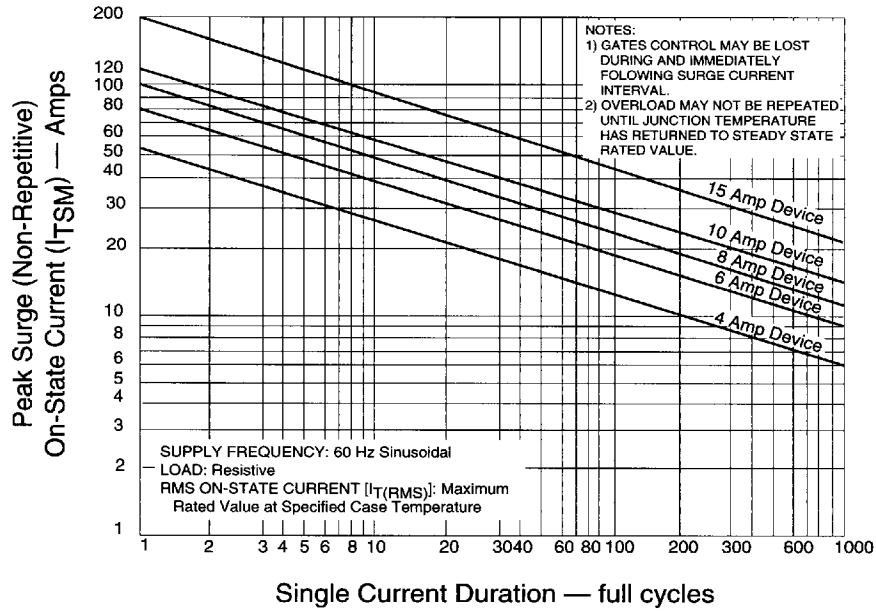

## Electrical Specifications

Figure 7A — Power Dissipation (typical) vs On-state Current

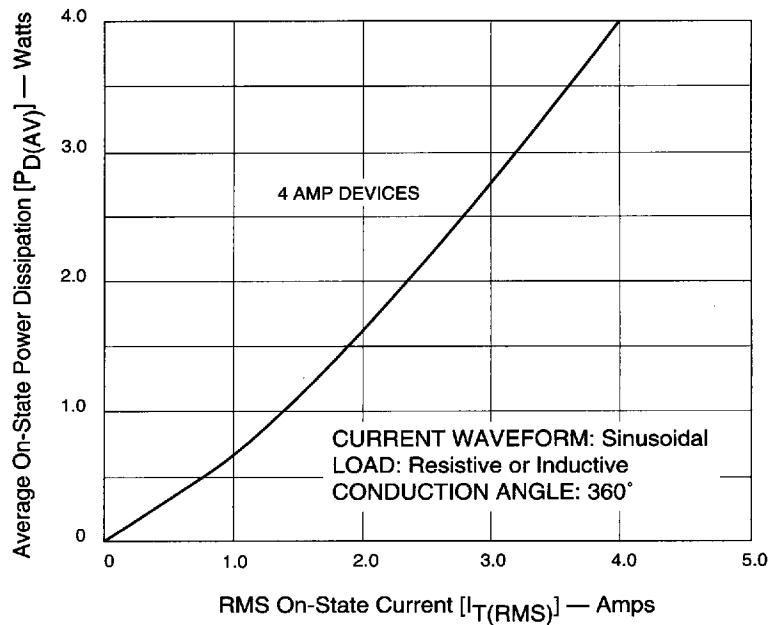


Figure 7B — Power Dissipation (Typical) vs. On-State Current

