

FM IF SYSTEM FOR CAR RADIOS

The KA2245 is a monolithic integrated circuit consisting of an FM IF amplifier and detector. It is suitable for car radios.


FUNCTIONS

- 3-stage IF amplifier.
- Peak detector.

FEATURES

- Suitable for FM car radios.
- Wide operating supply voltage range: $V_{CC} = 8V \sim 14V$.
- High detector output voltage ($V_O = 500mV$, Typ).
- Excellent AM rejection: $AMR = 50dB$ (Typ).
- High sensitivity: $V_I(LIM) = 50dB\mu V$ (Typ).
- Simplified single coil tuning.
- Low distortion (THD=0.1%: Typ).
- Minimum number of external parts required.

7 SIP

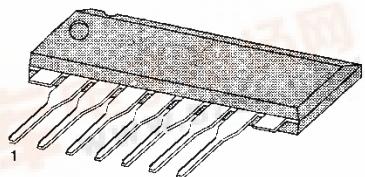

ORDERING INFORMATION

Device	Package	Operating Temperature
KA2245	7 SIP	-20°C ~ +70°C

BLOCK DIAGRAM

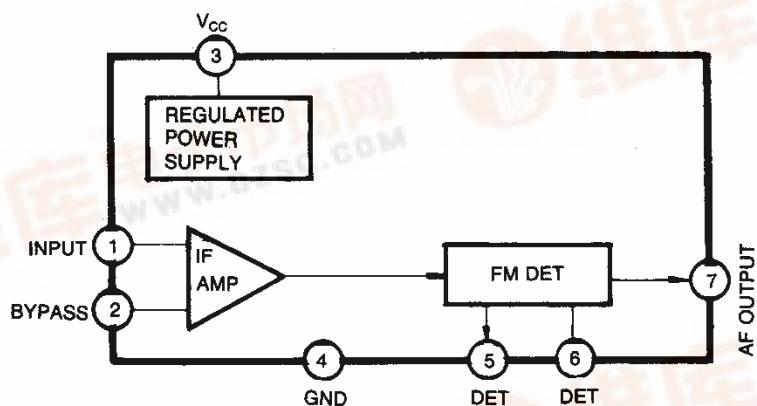


Fig. 1

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)


Characteristic	Symbol	Value	Unit
Supply Voltage	V_{CC}	15	V
Input Voltage	V_I	0.7	V
Power Dissipation	P_D	400	mW
Operating Temperature	T_{OPR}	-20 ~ +70	$^\circ\text{C}$
Storage Temperature	T_{STG}	-40 ~ +125	$^\circ\text{C}$

* : Derated above $T_a=25^\circ\text{C}$ in the proportion of 4mW/ $^\circ\text{C}$


ELECTRICAL CHARACTERISTICS

($T_a = 25^\circ\text{C}$, $V_{CC} = 12\text{V}$, $f = 10.7\text{MHz}$, $f_m = 400\text{Hz}$)


Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Quiescent Circuit Current	I_{CCQ}	$V_I = 0$	8	12	15	mA
-3dB Limiting Sensitivity	$V_I (\text{LIM})$	-3dB point from V_O $V_I = 80\text{dB}\mu$, $\Delta f = \pm 75\text{KHz}$		50	55	$\text{dB}\mu$
AM Rejection Ratio	AMR	FM: $\Delta f = \pm 75\text{KHz}$ dev AM: 30% Mod $V_I = 80\text{dB}\mu$		50		dB
Detector Output Voltage	V_O	$\Delta f = \pm 75\text{KHz}$ dev $V_I = 80\text{dB}\mu\text{V}$	300	500	700	mV
Total Harmonic Distortion	THD	$\Delta f = \pm 22.5\text{KHz}$ dev $V_I = 80\text{dB}\mu\text{V}$		0.2		%
Signal to Noise Ratio	S/N	$\Delta f = \pm 75\text{KHz}$ dev $V_I = 80\text{dB}\mu\text{V}$		60		dB

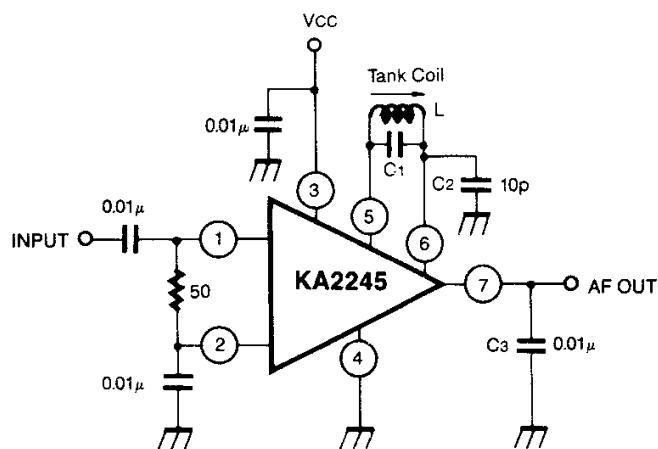TEST CIRCUIT

APPLICATION CIRCUIT

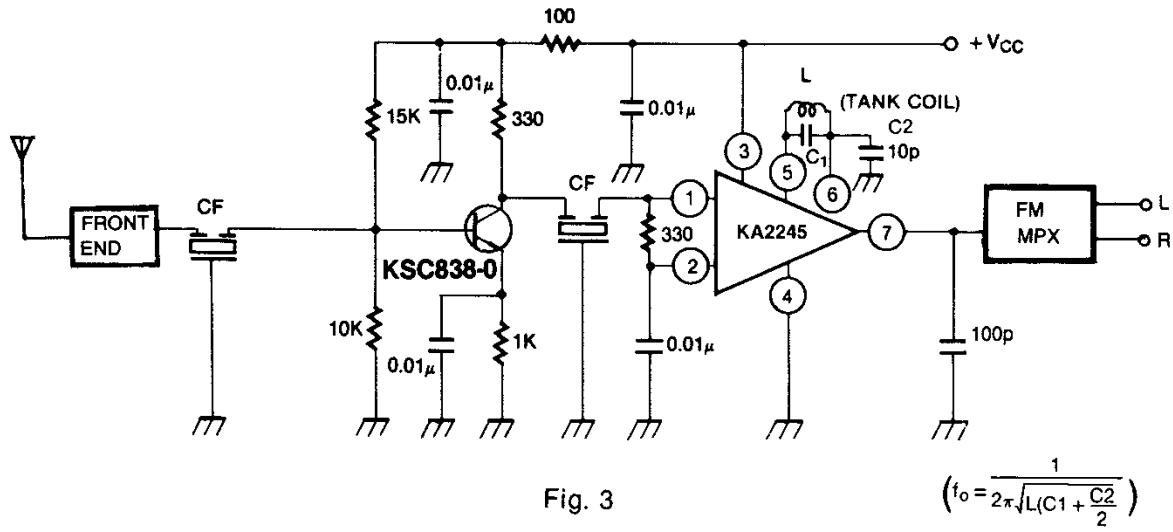

COIL SPECIFICATIONS



C _o (pF)	f (MHz)	O _o (%)	Turns		
			4 - 6		
27	10.7	150	18		