


## INVERTER

The KIC7SH04FU is a advanced high speed CMOS INVERTER fabricated with silicon gate  $C^2$ MOS technology. It achieves the high speed operation similar to equivalent Bipolar Schottky TTL while maintaining the CMOS low power dissipation. Since the internal circuit is composed of a single stage inverter, it can be used in analog applications such as crystal oscillators. An input protection circuit ensures that 0 to 7V can be applied to the input pins without regard to the supply voltage. This device can be used to interface 5V to 3V systems and two supply systems such as battery back up. This circuit prevents device destruction due to mismatched supply and input voltages.

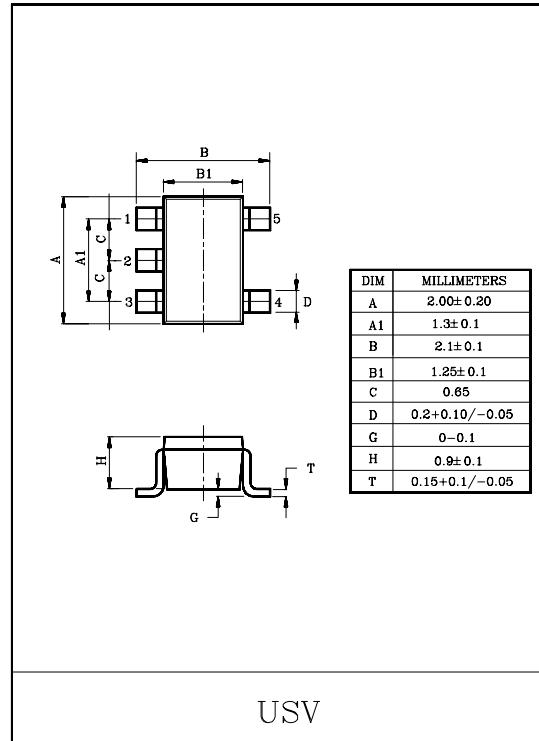


## FEATURES

- High Speed :  $t_{pd}=3.8\text{ns}(\text{Typ.})$  at  $V_{CC}=5\text{V}$ .
- Low Power Dissipation :  $I_{CC}=2\mu\text{A}(\text{Max.})$  at  $T_a=25^\circ\text{C}$ .
- High Noise Immunity :  $V_{NIH}=V_{NIL}=28\%$   $V_{CC}(\text{Min.})$ .
- Power Down Protection is Provided on all inputs.
- Balanced Propagation Delays :  $t_{PLH}=t_{PHL}$
- Wide Operating Voltage Range :  $V_{CC(\text{opr})}=2\sim5.5\text{V}$ .


MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ )

| CHARACTERISTIC              | SYMBOL    | RATING             | UNIT |
|-----------------------------|-----------|--------------------|------|
| Supply Voltage Range        | $V_{CC}$  | -0.5~7.0           | V    |
| DC Input Voltage            | $V_{IN}$  | -0.5~7.0           | V    |
| DC Output Voltage           | $V_{OUT}$ | -0.5~ $V_{CC}+0.5$ | V    |
| Input Diode Current         | $I_{IK}$  | -20                | mA   |
| Output Diode Current        | $I_{OK}$  | ±20                | mA   |
| DC Output Current           | $I_{OUT}$ | ±25                | mA   |
| DC $V_{CC}$ /Ground Current | $I_{CC}$  | ±50                | mA   |
| Power Dissipation           | $P_D$     | 200                | mW   |
| Storage Temperature         | $T_{stg}$ | -65~150            | °C   |
| Lead Temperature (10s)      | $T_L$     | 260                | °C   |

## MARKING

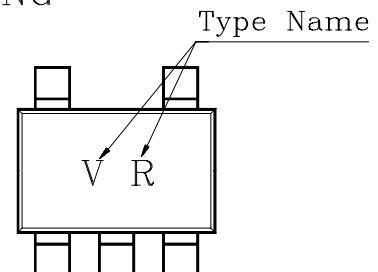


## PIN CONNECTION (TOP VIEW)

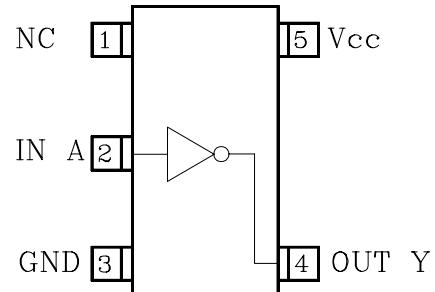

# KIC7SH04FU

## LOGIC DIAGRAM



## TRUTH TABLE

| A | Y |
|---|---|
| L | H |
| H | L |

## RECOMMENDED OPERATING CONDITIONS

| CHARACTERISTIC           | SYMBOL                          | RATING                            | UNIT |
|--------------------------|---------------------------------|-----------------------------------|------|
| Supply Voltage           | V <sub>CC</sub>                 | 2.0~5.5                           | V    |
| Input Voltage            | V <sub>IN</sub>                 | 0~5.5                             | V    |
| Output Voltage           | V <sub>OUT</sub>                | 0~V <sub>CC</sub>                 | V    |
| Operating Temperature    | T <sub>opr</sub>                | -40~85                            | °C   |
| Input Rise and Fall Time | t <sub>r</sub> , t <sub>f</sub> | 0~100 (V <sub>CC</sub> =3.3±0.3V) | ns/V |
|                          |                                 | 0~20 (V <sub>CC</sub> =5±0.5V)    |      |

## DC ELECTRICAL CHARACTERISTICS

| CHARACTERISTIC            | SYMBOL          | TEST CONDITION                          |  | V <sub>CC</sub> | Ta=25°C                 |      |      | Ta=-40~85°C             |      | UNIT |  |
|---------------------------|-----------------|---|--|-----------------|-------------------------|------|------|-------------------------|------|------|--|
|                           |                 |   |  |                 | MIN.                    | TYP. | MAX. | MIN.                    | MAX. |      |  |
| High-Level Input Voltage  | V <sub>IH</sub> | -                                       |  | 2.0             | 1.5                     | -    | -    | 1.5                     | -    | V    |  |
|                           |                 |   |  | 3.0~5.5         | V <sub>CC</sub><br>×0.7 | -    | -    | V <sub>CC</sub><br>×0.7 | -    |      |  |
| Low-Level Input Voltage   | V <sub>IL</sub> | -                                       |  | 2.0             | -                       | -    | 0.50 | -                       | 0.50 | V    |  |
|                           |                 |   |  | 3.0~5.5         | V <sub>CC</sub><br>×0.3 | -    | -    | V <sub>CC</sub><br>×0.3 | -    |      |  |
| High-Level Output Voltage | V <sub>OH</sub> | V <sub>IN</sub> =V <sub>IL</sub>        | I <sub>OH</sub> =-50μA                         | 2.0             | 1.9                     | 2.0  | -    | 1.9                     | -    | V    |  |
|                           |                 |   |  | 3.0             | 2.9                     | 3.0  | -    | 2.9                     | -    |      |  |
|                           |                 | V <sub>IN</sub> =GND                    | I <sub>OH</sub> =-4mA<br>I <sub>OH</sub> =-8mA | 4.5             | 4.4                     | 4.5  | -    | 4.4                     | -    |      |  |
|                           |                 |   |  | 3.0             | 2.58                    | -    | -    | 2.48                    | -    |      |  |
| Low-Level Output Voltage  | V <sub>OL</sub> | V <sub>IN</sub> =V <sub>IH</sub>        | I <sub>OL</sub> =50μA                          | 4.5             | -                       | 0.0  | 0.1  | -                       | 0.1  | V    |  |
|                           |                 |   |  | 2.0             | -                       | 0.0  | 0.1  | -                       | 0.1  |      |  |
|                           |                 | V <sub>IN</sub> =V <sub>CC</sub>        | I <sub>OL</sub> =4mA<br>I <sub>OL</sub> =8mA   | 3.0             | -                       | 0.0  | 0.1  | -                       | 0.1  |      |  |
|                           |                 |   |  | 4.5             | -                       | 0.36 | -    | 0.36                    | -    |      |  |
| Input Leakage Current     | I <sub>IN</sub> | V <sub>IN</sub> =5.5V or GND            |  | 0~5.5           | -                       | -    | ±0.1 | -                       | ±1.0 | μA   |  |
| Quiescent Supply Current  | I <sub>CC</sub> | V <sub>IN</sub> =V <sub>CC</sub> or GND |  | 5.5             | -                       | -    | 2.0  | -                       | 20.0 |      |  |

# KIC7SH04FU

## AC ELECTRICAL CHARACTERISTICS (Input $t_r=t_f=3\text{ns}$ )

| CHARACTERISTIC                | SYMBOL                 | TEST CONDITION | Ta=25°C             |                     |      | Ta=-40~85°C |      | UNIT     |  |
|-------------------------------|------------------------|----------------|---------------------|---------------------|------|-------------|------|----------|--|
|                               |                        |                | V <sub>CC</sub> (V) | C <sub>L</sub> (pF) | MIN. | TYP.        | MAX. |          |  |
| Propagation Delay Time        | $t_{PLH}$<br>$t_{PHL}$ | -              | 3.3±0.3             | 15                  | -    | 5.0         | 7.1  | 1.0 8.5  |  |
|                               |                        |                |                     | 50                  | -    | 7.5         | 10.6 | 1.0 12.0 |  |
|                               |                        |                | 5.0±0.5             | 15                  | -    | 3.8         | 5.5  | 1.0 6.5  |  |
|                               |                        |                |                     | 50                  | -    | 5.3         | 7.5  | 1.0 8.5  |  |
| Input Capacitance             | C <sub>IN</sub>        | -              |                     |                     | -    | 4           | 10   | - 10     |  |
| Power Dissipation Capacitance | C <sub>PD</sub>        | (Note 1)       |                     |                     | -    | 13          | -    | -        |  |

Note 1 : C<sub>PD</sub> defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load average operating current can be obtained by the equation hereunder.

$$I_{CC(\text{opr})} = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}$$

## INPUT EQUIVALENT CIRCUIT

