

mosaic

semiconductor, inc.

11403 West Bernado Court, Suite 100, San Diego, CA 92127.
Tel No: (001) 858 674 2233, Fax No: (001) 858 674 2230

32K x 32 EEPROM MODULE

PUMA 2E1000 - 150/200/250

Issue 4.0 : January 2000

Description

The PUMA 2E1000 is a 1Mbit EEPROM module user configurable as 32Kx32, 64Kx16 or 128Kx8. Available with access times of 150, 200 & 250ns the device has an industry standard ceramic 66 pin P.G.A footprint.

The device features byte and page write facility, 10,000 Write Erase cycle capability and data retention time of 10 years.

The device may be screened in accordance with MIL-STD-883

1,048,576 bit CMOS High Speed EEPROM

Features

Access times of 150/200/250 ns.

User Configurable as 8 / 16 / 32 bit wide.

Upgradeable footprint.

Package Suitable for Thermal Ladder Applications.


Single byte and Page Write operation.

DATA Polling and Toggle Bit for End of Write Detection.


Hardware and Software Data Protection.

May be screened in accordance with MIL-STD-883.

Block Diagram

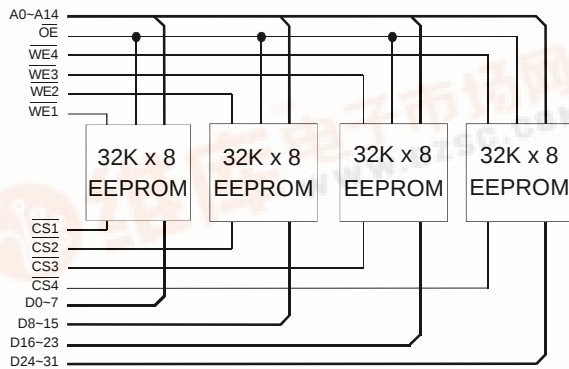

Pin Definition

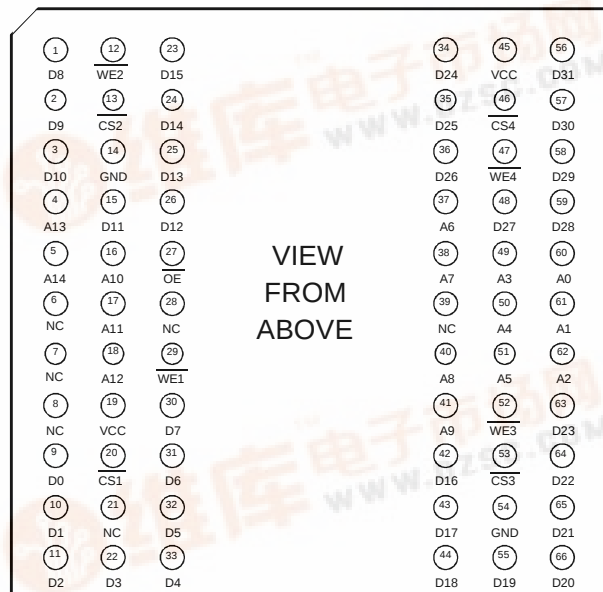


Pin Functions

A0-14 Address Inputs
CS1-4 Chip Select
WE1-4 Write Enable
V_{CC} Power (+5V)

D0-31 Data Inputs/Outputs
OE Output Enable
NC No Connect
GND Ground

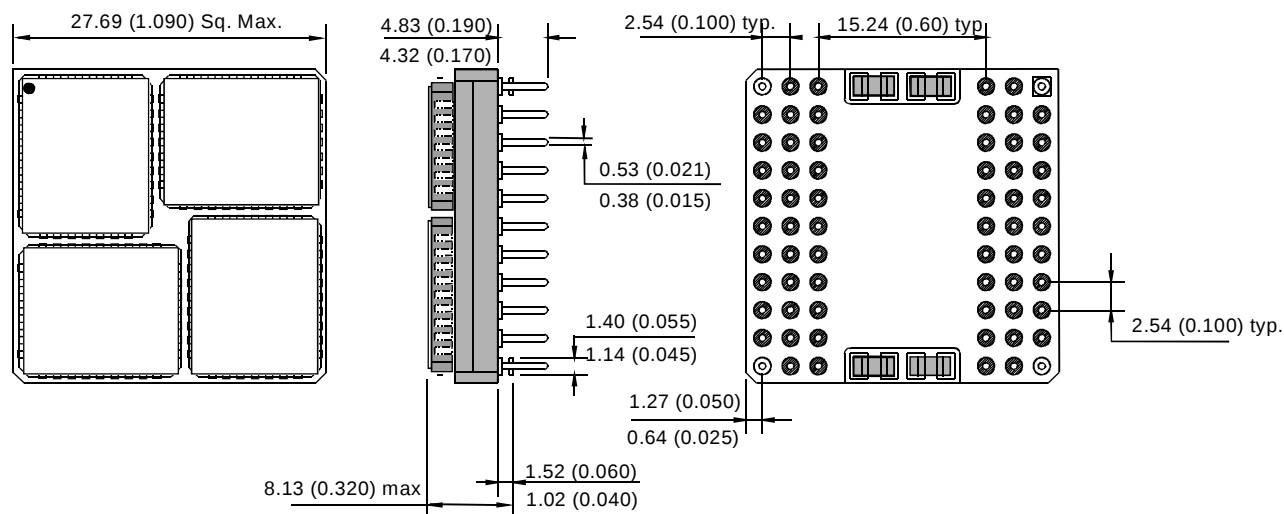

Package Details Dimensions in mm (inches).

Ordering Information
PUMA 2E1000MB - 15

Speed

Temp. range/screening

Memory Type

15 = 150 ns

20 = 200 ns

25 = 250 ns

Blank = Commercial Temp.

I = Industrial Temp.

M = Military Temp.

MB = Screened in accordance with MIL-STD-883

E1000 = EEPROM (Configurable as 32Kx32, 64Kx16 or 128Kx8)

Note :

Although this data is believed to be accurate the information contained herein is not intended to and does not create any warranty of merchantability or fitness for a particular purpose.

Our products are subject to a constant process of development. Data may be changed without notice.

Products are not authorised for use as critical components in life support devices without the express written approval of a company director.