

Photocoupler



KPC3051 • KPC3052

These Photocouplers consist of a Gallium Arsenide Infrared Emitting Diode and a Silicon NPNPN Phototriac in a 6-pin package.

FEATURES


- Peak Off-state Voltage : Min.600V
- On-state Current : Max. 100mA
- Electrical Isolation Voltage : AC5000Vrms
- Trigger LED Current

APPLICATIONS

- Office Machine
- Household Use Equipment
- Triac Driver
- Solid State Relay

DIMENSION

(Unit : mm)

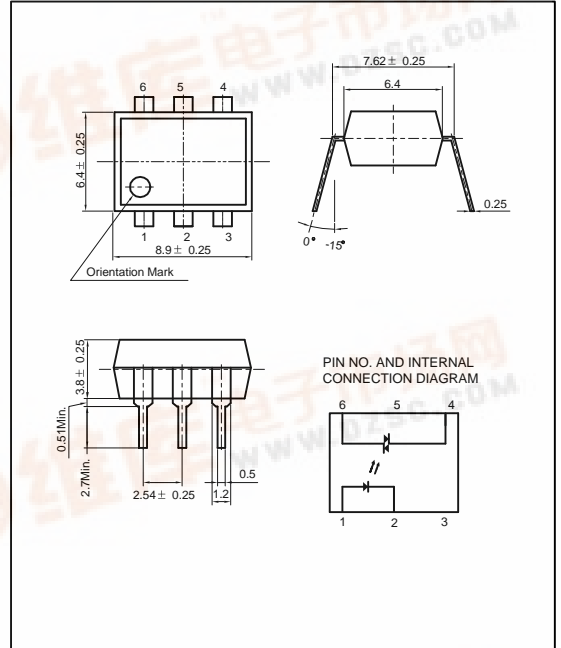

MAXIMUM RATINGS

(Ta=25)

Parameter		Symbol	Rating	Unit
Input	Forward Current	IF	50	mA
	Reverse Voltage	VR	5	V
	Peak Forward Current *1	IFP	1	A
	Power Dissipation	PD	100	mW
Output	Peak Off-state Voltage	VDRM	600	V
	On-state RMS Current	IT(rms)	Ta=25	100
			Ta=70	50
	Peak Nonrepetitive Surge Current *2	Isurge	1.2	A
Power Dissipation	PD	300	mW	
Input to Output Isolation Voltage *3		Viso	AC5000	Vrms
Storage Temperature		Tstg	-55~+100	
Operating Temperature		Topr	-40~+100	
Lead Soldering Temperature *3		Tsol	260	
Total Power Dissipation		Ptot	330	mW

*1. Input current with 100µs pulse width, 1% duty cycle

*2. 100µs pulse, 120 pps

*3. Measured at RH=40~60% for 1min

*4. 1/16 inch form case for 10sec



KPC3051 • KPC3052

ELECTRO-OPTICAL CHARACTERISTICS


(Ta=25 , unless otherwise noted)

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit.	
Input	Forward Voltage	V _F	I _F =10mA	-	1.15	1.30	V	
	Reverse Current	I _R	V _R =5V	-	-	10	mA	
	Capacitance	C _T	V=0, f=1MHz	-	30	-	pF	
Output	Peak Off-state Current	I _{DRM}	V _{DRM} =600V	-	10	100	nA	
	Peak On-state Voltage	V _{TM}	I _T =100mA	-	1.4	3	V	
	Holding Current	I _H		-	100	-	μA	
	Critical Rate Of Rese Off-state Voltage ^{*5}	dV/dt		-	100	-	V/μs	
Coupled	Trigger LED Current	KPC3051	I _{FT}	V _T =6V		8	15	mA
		KPC3052			-	5	10.0	
	Input-Output Capacitance	C _{IO}	V=0, f=1MHz	-	1	-	pF	
	Input-Output Isolation Resistance	R _{IO}	RH=40~60%, V=500V	-	10 ¹¹	-		


*5. Input Voltage=0, the frequency of V_{in} is increased until the Phototriac just turns on.

KPC3051 • KPC3052


Forward Current vs. Ambient Temperature

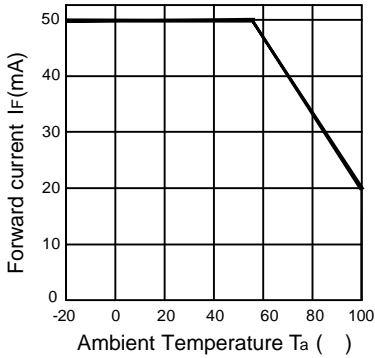


R.M.S. On-state Current vs. Ambient Temperature

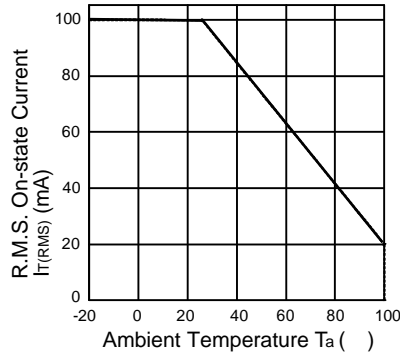


Forward Current vs. Forward Voltage

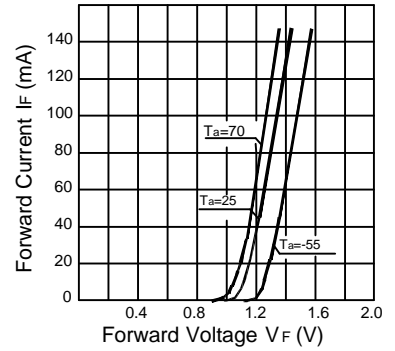


On-state Current vs. On-state Voltage

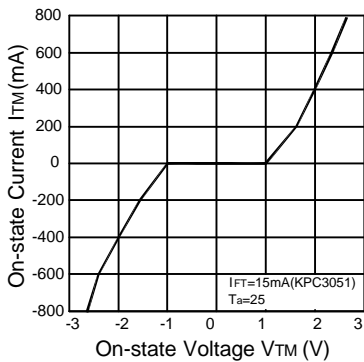


Peak Off-state Current vs. Ambient Temperature

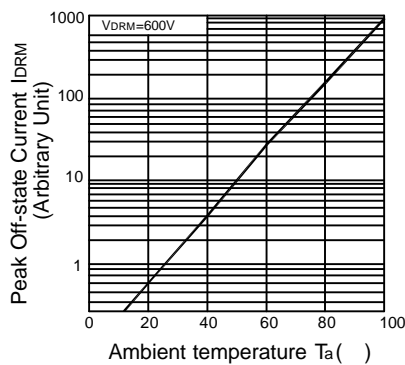


Peak Off-state Voltage vs. Ambient Temperature

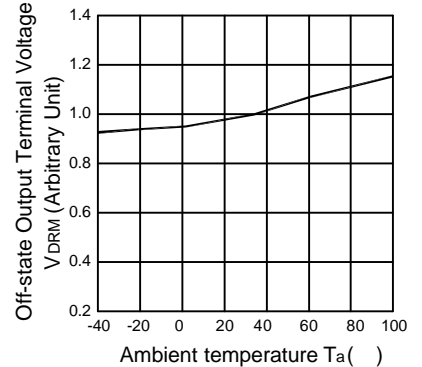

Trigger LED Current vs. Ambient Temperature

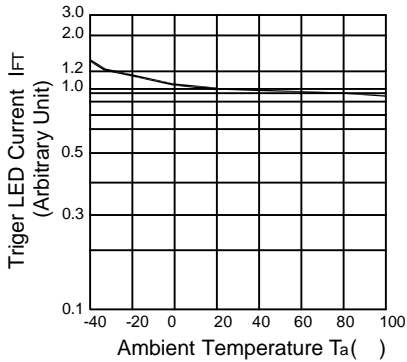

Holding Current vs. Ambient Temperature

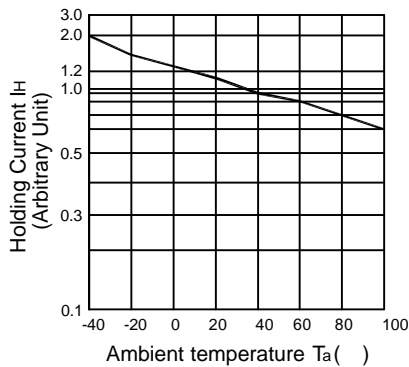

Normalized LED Current vs. LED Current Pulse Width

