



EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DTT-091-004 REV : 1.1
 ECN : _____ PAGE : 1/7

1.9mm Round Subminiature “Gull Wing” Lead Phototransistor

MODEL NO : PT91-21C/TR7

■ Features :

- Fast response time
- High photo sensitivity
- Small junction capacitance

■ Description :

PT91-21C/TR7 is a phototransistor in miniature SMD package which is molded in a water clear plastic with spherical top view lens .The device is spectrally matched to infrared emitting diode.

■ Applications :

- Optoelectronic switch
- VCR ,Video Camera
- Floppy disk drive
- Infrared applied system

PART NO.	CHIP	LENS COLOR
	MATERIAL	
PT	Silicon	Water clear





EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DTT-091-004 REV : 1.1
ECN : _____ PAGE : 3/7

1.9mm Round Subminiature “Gull Wing” Lead Phototransistor

MODEL NO : PT91-21C/TR7

■ Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Rating	Unit	Notice
Collector-Emitter Voltage	V_{CEO}	30	V	
Emitter-Collector-Voltage	V_{ECO}	5	V	
Collector Current	I_C	20	mA	
Operating Temperature	Topr	-25 ~ +85	°C	
Storage Temperature	Tstg	-40 ~ +85	°C	
Lead Soldering Temperature	Tsol	260	°C	
Power Dissipation at(or below) 25°C Free Air Temperature	Pc	75	mW	

■ Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Collector-Emitter Breakdown Voltage	BV_{CEO}	30	----	----	V	$I_C=100\mu A$ $E_e=0mW/cm^2$
Emitter-Collector Breakdown Voltage	BV_{ECO}	5	----	----	V	$I_E=100\mu A$ $E_e=0mW/cm^2$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	----	----	0.4	V	$I_C=2mA$ $E_e=1mW/cm^2$
Rise Time	t_r	----	15	----	μS	$V_{CE}=5V$ $I_C=1mA$ $R_L=1000\Omega$
Fall Time	t_f	----	15	----		
Collector Dark Current	I_{CEO}	----	----	100	nA	$E_e=0mW/cm^2$ $V_{CE}=20V$
On State Collector Current	$I_{C(on)}$	1.0	1.5	----	mA	$E_e=1mW/cm^2$ $V_{CE}=5V$
Wavelength of Peak Sensitivity	λ_p	----	860	----	nm	----
Rang of Spectral Bandwidth	$\lambda_{0.5}$	----	400-1200	----	nm	----



1.9mm Round Subminiature “Gull Wing” Lead Phototransistor

MODEL NO : PT91-21C/TR7

■ Typical Electrical/Optical/Characteristics Curves :

Fig.1 Collector Power Dissipation vs. Ambient Temperature

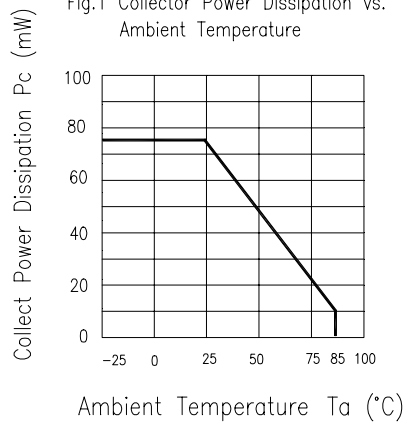


Fig.2 Collector Dark Current vs. Ambient Temperature

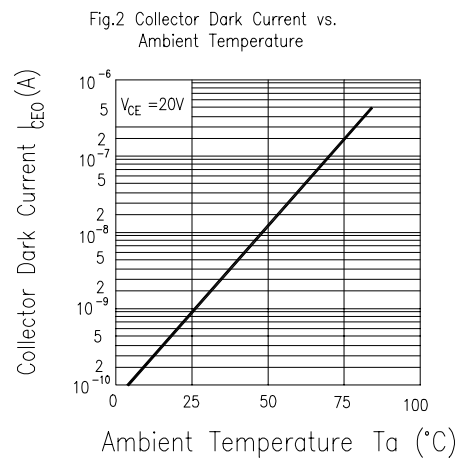


Fig. 3 Relative Collector Current vs. Ambient Temperature

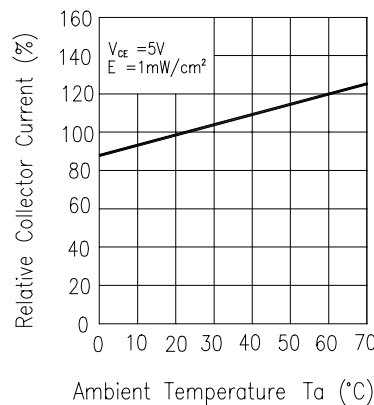


Fig.4 Collector Current vs. Irradiance

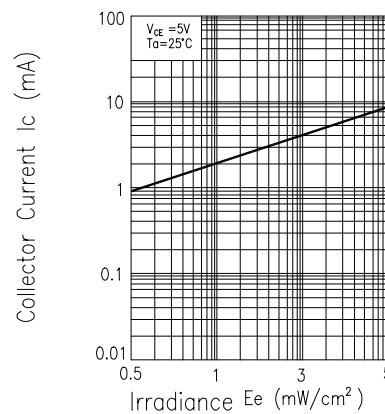


Fig.5 Spectral Sensitivity


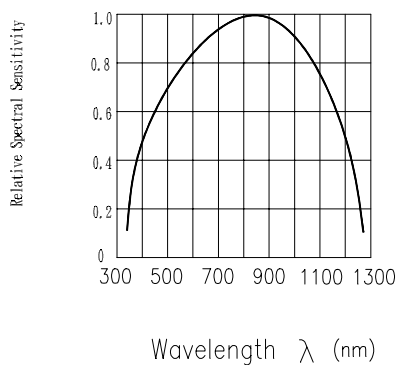


Fig.6 Collector Current vs. Collector-Emitter Voltage



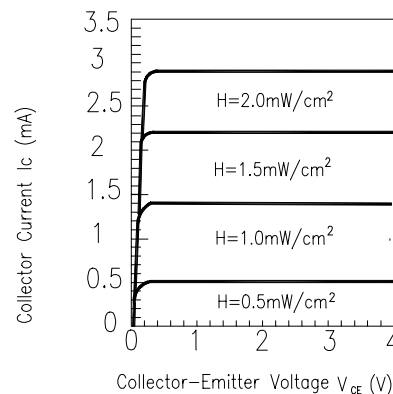

EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DTT-091-004 REV : 1.1
 ECN : _____ PAGE : 5/7

1.9mm Round Subminiature “Gull Wing” Lead Phototransistor



MODEL NO : PT91-21C/TR7

■ Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.

Confidence level:90%

LTPD:10%

NO.	Item	Test Conditions	Test Hours/ Cycles	Sample Size	Failure Judgement Criteria	Ac/Re
1	REFLOW	TEMP : 240°C ± 5 °C 5 secs	6 mins	22 pcs	$I_{C(on)} \leq L \times 0.8$ L:Lower specification limit	0/1
2	Temperature Cycle	H : +85°C 30 mins  L : -55°C 30 mins	50 cycles	22 pcs		0/1
3	Thermal Shock	H : +100°C 5 mins  L : -10°C 5 mins	50 cycles	22 pcs		0/1
4	High Temperature Storage	TEMP. : +100°C	1000 hrs	22 pcs		0/1
5	Low Temperature Storage	TEMP. : -55°C	1000 hrs	22 pcs		0/1
6	DC Operating Life	$V_{CE}=5V$	1000 hrs	22 pcs		0/1
7	High Temperature / High Humidity	85°C / 85% R.H.	1000 hrs	22 pcs		0/1



EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DTT-091-004 REV : 1.1
ECN : _____ PAGE : 6/7

1.9mm Round Subminiature "Gull Wing" Lead Phototransistor


MODEL NO : PT91-21C/TR7

■ Test Method For Reverse Light Current


Condition: $E_e=1\text{mW}/\text{cm}^2, V_{CE}=5\text{V}$

Test Item: Collector Current [$I_{C(on)}$]

(Unit:mA)

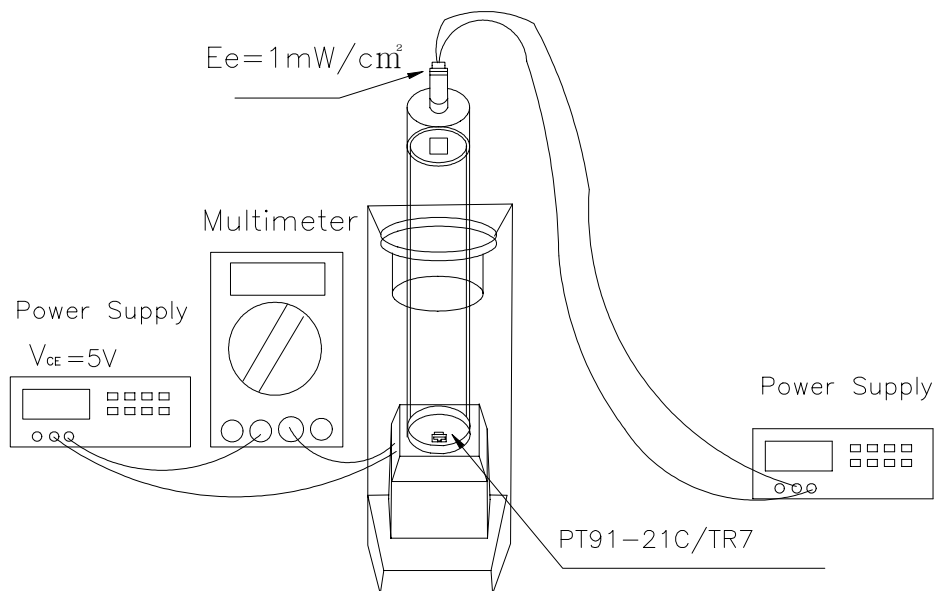

■ Package Dimensions:

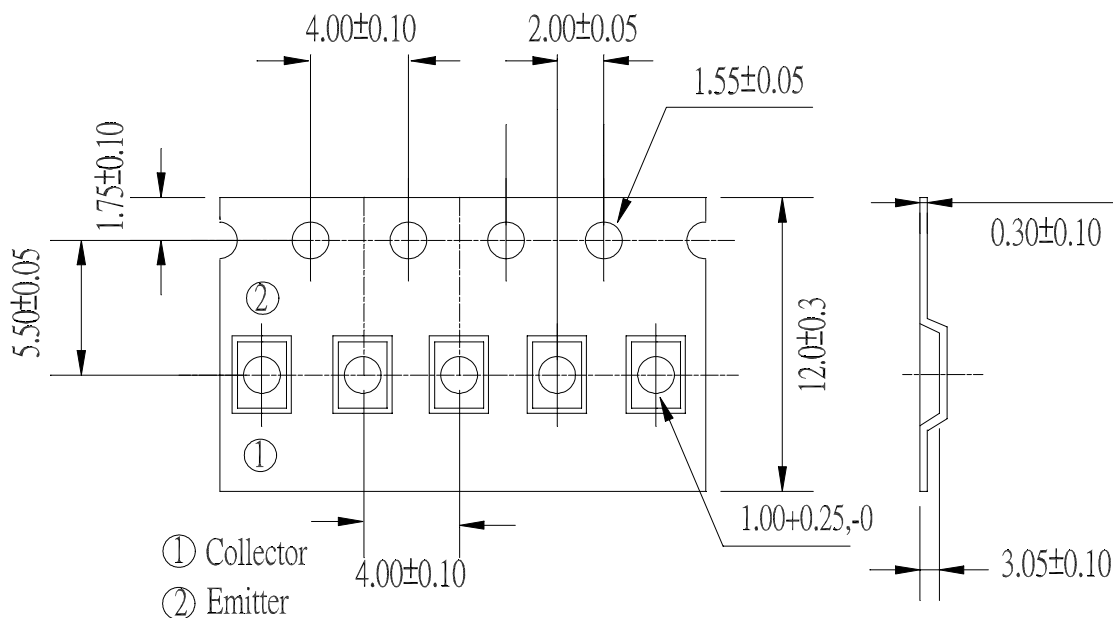




EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DTT-091-004 REV : 1.1
ECN : _____ PAGE : 7/7

1.9mm Round Subminiature “Gull Wing” Lead Phototransistor

MODEL NO : PT91-21C/TR7

■ Packing Specifications

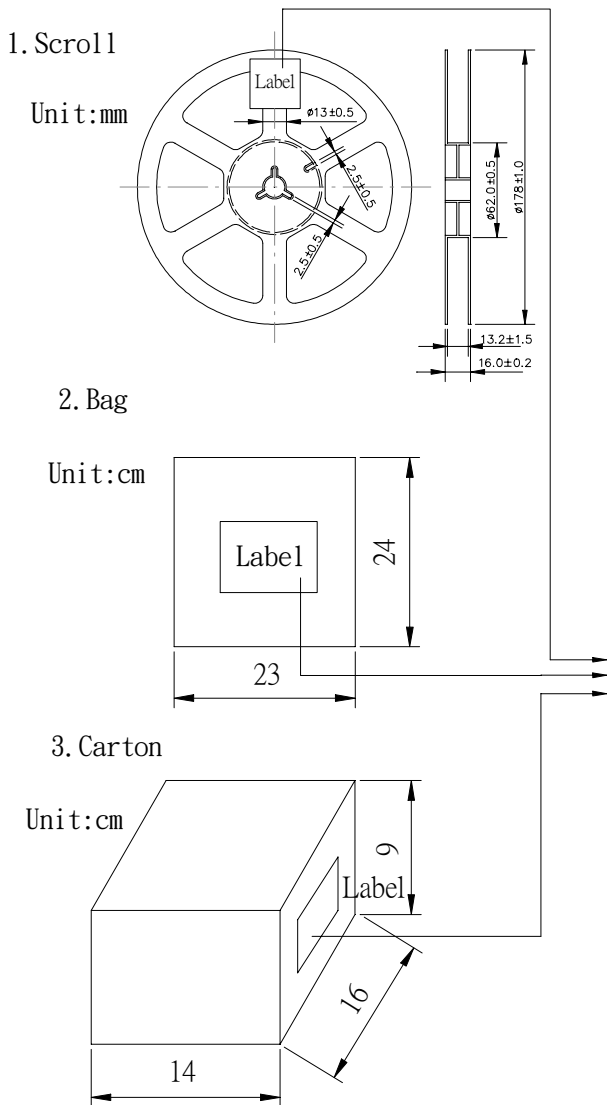

CPN:
P/N:
PT91-21C/TR7

QTY: CAT:
HUE:
REF:

LOT NO:

MADE IN TAIWAN

CPN : Customer's Production Number
P/N : Production Number
QTY : Packing Quantity
CAT : Ranks
HUE : Peak Wavelength
REF : Reference
LOT NO : Lot Number
MADE IN TAIWAN : Production place

■ Packing Quantity Specification

- 1000 Pcs/1 Volume , 1 Volume/1Bag
- 10 Bags/1Carton