

**EVERLIGHT ELECTRONICS CO., LTD.**DEVICE NUMBER : DPT-011-026REV : 1.0

ECN : _____

PAGE : 1/7**1206 Package Chip Phototransistor**MODEL NO : PT11-21C/L41/TR8**Features :**

- Fast response time
- High photo sensitivity
- Small junction capacitance
- High reliability

Description :

PT11-21C/L41/TR8 is a phototransistor in miniature SMD package which is molded in a water clear with flat top view lens. The device is spectrally matched to visible and infrared emitting diode.

Applications :

- Optoelectronic switch
- VCR ,Video ,Camera
- Infrared applied system

PART NO.	CHIP	LENS COLOR
	MATERIAL	
PT	Silicon	Water Clear





EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DPT-011-026

REV : 1.0


ECN :

PAGE : 2/7

1206 Package Chip Phototransistor

MODEL NO : PT11-21C/L41/TR8

■ Package Dimensions :

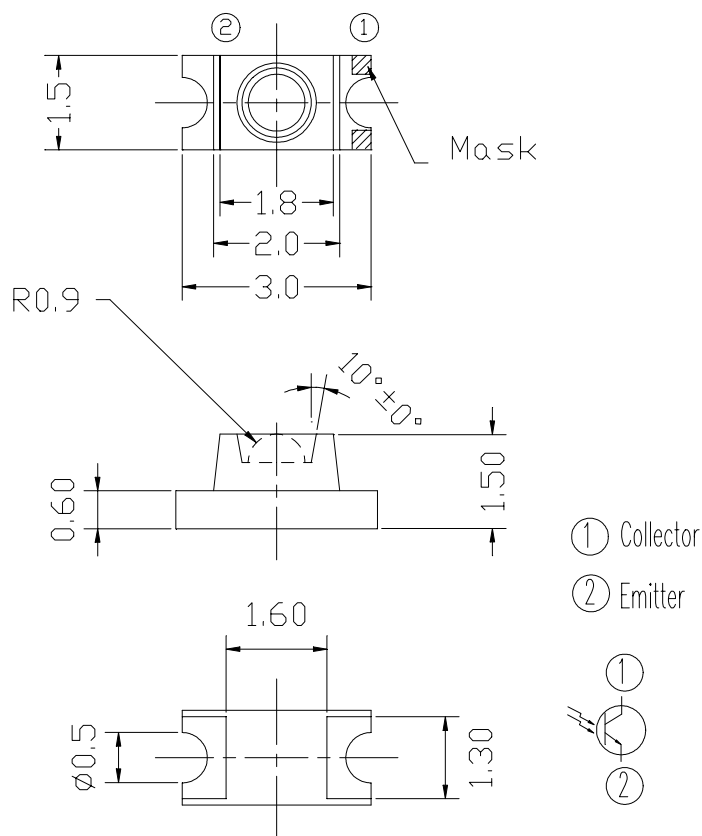

■ Notes :

- 1.All dimensions are in millimeter.
- 2.General Tolerance: $\pm 0.1\text{mm}$
- 3.Lens color : Water clear.
- 4.Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 5.These specification sheets include materials protected under copyright of EVERLIGHT Corporation . Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
- 6.When using this product , please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.



EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DPT-011-026REV : 1.0

ECN : _____

PAGE : 3/7

1206 Package Chip Phototransistor

MODEL NO : PT11-21C/L41/TR8

■ Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Rating	Unit	Notice
Collector-Emitter Voltage	V_{CEO}	60	V	
Emitter-Collector- Voltage	V_{ECO}	5	V	
Collector Current	I_C	20	mA	
Operating Temperature	T_{opr}	-25 ~ +85	°C	
Storage Temperature	T_{stg}	-40 ~ +85	°C	
Soldering Temperature	T_{sol}	260	°C	
Power Dissipation at(or below) 25°C Free Air Temperature	P_c	75	mW	

■ Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Collector-Emitter Breakdown Voltage	BV_{CEO}	60	----	----	V	$I_C=100\mu A$ $E_e=0mW/cm^2$
Emitter-Collector Breakdown Voltage	BV_{ECO}	5	----	----	V	$I_E=100\mu A$ $E_e=0mW/cm^2$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	----	----	0.4	V	$I_C=2mA$ $E_e=1mW/cm^2$
Rise Time	t_r	----	15	----	μS	$V_{CE}=5V$ $I_C=1mA$ $R_L=1000\Omega$
Fall Time	t_f	----	15	----		
Collector Dark Current	I_{CEO}	----	----	100	nA	$V_{CE}=20V$ $E_e=0mW/cm^2$
On State Collector Current	$I_{C(on)}$	0.5	0.8	----	mA	$V_{CE}=5V$ $E_e=1mW/cm^2$
Wavelength of Peak Sensitivity	λ_p	----	860	----	nm	----
Rang of Spectral Bandwidth	$\lambda_{0.5}$	----	400---1200	----	nm	----



EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DPT-011-026

REV : 1.0

ECN : _____


PAGE : 4/7

1206 Package Chip Phototransistor

MODEL NO : PT11-21C/L41/TR8


Typical Electrical/Optical/Characteristics Curves

Fig.1 Collector Power Dissipation vs. Ambient Temperature

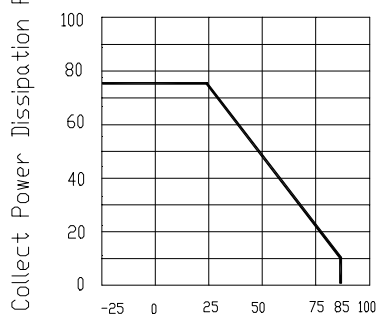


Ambient Temperature T_a (°C)

Fig.2 Collector Dark Current vs. Ambient Temperature

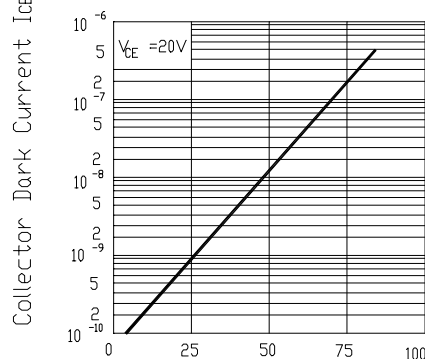


Ambient Temperature T_a (°C)

Fig. 3 Relative Collector Current vs. Ambient Temperature

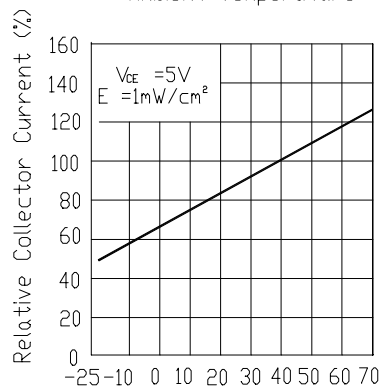


Ambient Temperature T_a (°C)

Fig.4 Collector Current vs. Irradiance

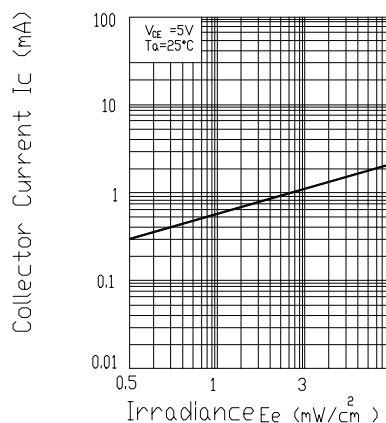


Irradiance E_e (mW/cm²)

Fig.5 Spectral Sensitivity

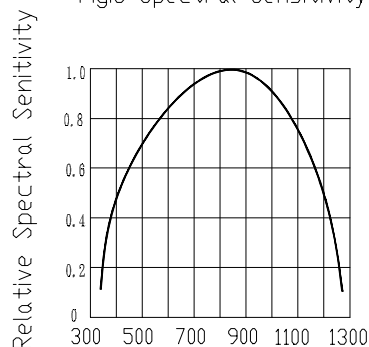

Wavelength λ (nm)

Fig.6 Collector Current vs. Collector-Emitter Voltage

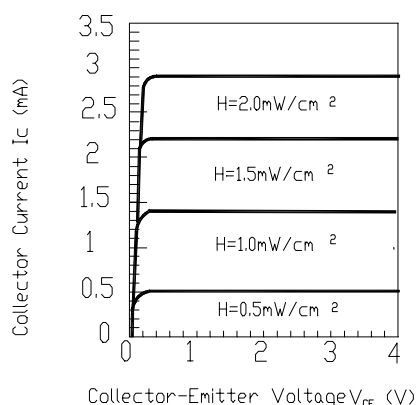

Collector-Emitter Voltage V_{ce} (V)



EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DPT-011-026REV : 1.0

ECN : _____

PAGE : 5/7

1206 Package Chip Phototransistor

MODEL NO : PT11-21C/L41/TR8

■ Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.

Confidence level:90%

LTPD:10%

NO.	Item	Test Conditions	Test Hours/ Cycles	Sample Size	Failure Judgement Criteria	Ac/Re
1	REFLOW	TEMP : 240°C ± 5 °C 5 secs	6 mins	22 pcs		0/1
1	Solder Heat	TEMP : 260°C ± 5 °C	5 secs	22 pcs		0/1
2	Temperature Cycle	H : +85°C 30 mins ↑ 5 mins ↓ L : -55°C 30 mins	50 cycles	22 pcs	$I_{c(on)} \leq L \times 0.8$ L :Lower specification limit	0/1
3	Thermal Shock	H : +100°C 5 mins ↑ 10 secs ↓ L : -10°C 5 mins	50 cycles	22 pcs		0/1
4	High Temperature Storage	TEMP. : +100°C	1000 hrs	22 pcs		0/1
5	Low Temperature Storage	TEMP. : -55°C	1000 hrs	22 pcs		0/1
6	DC Operating Life	V _{CE} =5V	1000 hrs	22 pcs		0/1
7	High Temperature / High Humidity	85°C / 85% R.H.	1000 hrs	22 pcs		0/1



EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DPT-011-026

REV : 1.0

ECN : _____

PAGE : 6/7

1206 Package Chip Phototransistor


MODEL NO : PT11-21C/L41/TR8

■ Test Method For Reverse Light Current

Condition: $E_e=1\text{mW}/\text{cm}^2$, $V_{CE}=5\text{V}$

Test Item: Collector Current [$I_{C(on)}$]

(Unit :mA)

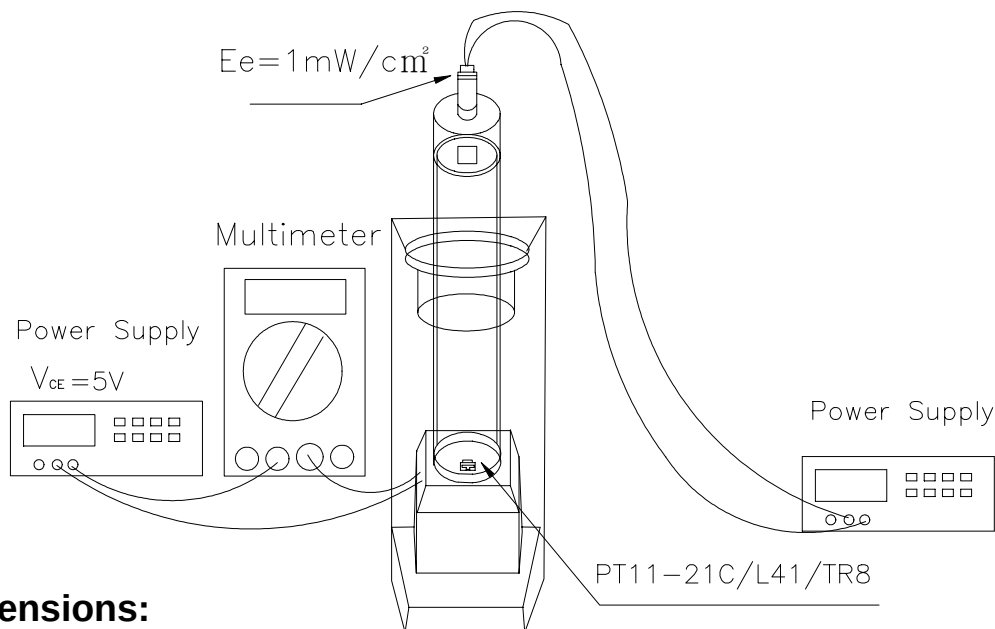

■ Package Dimensions:



EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DPT-011-026

REV : 1.0


ECN :

PAGE : 7/7

1206 Package Chip Phototransistor

MODEL NO : PT11-21C/L41/TR8

■ Packing Specifications

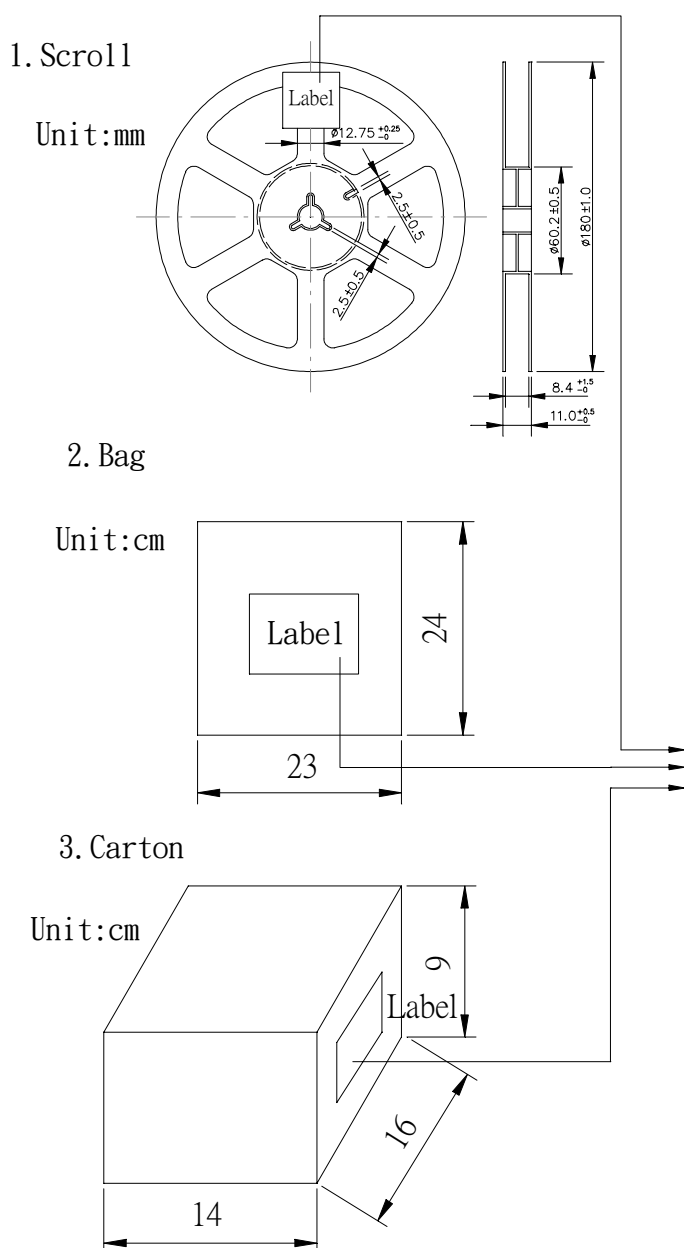

EVERLIGHT

CPN:

P/N:



PT11-21C/L41/TR8

QTY:



CAT:

HUE:

REF:

LOT NO:

MADE IN TAIWAN

CPN : Customer's Production Number

P/N : Production Number

QTY : Packing Quantity

CAT : Ranks

HUE : Peak Wavelength

REF : Reference

LOT NO : Lot Number

MADE IN TAIWAN : Production place

■ Packing Quantity Specification

1.2000 Pcs/1Volume , 1Volume/1Bag

2.55Bags/1Carton