


# Comus Group of Companies

# PRODUCT DATA SHEET

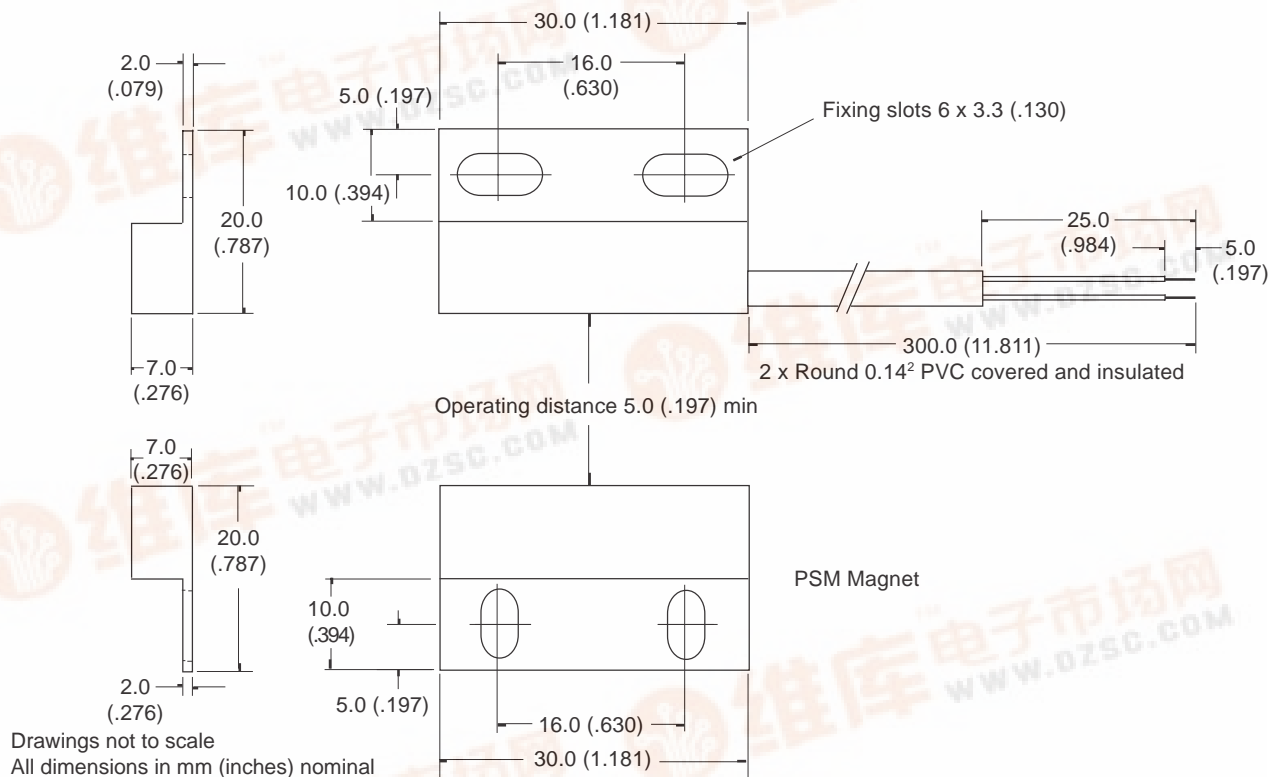

## SPECIFICATION

CONTACT FORM/STYLE		B/Closed
SWITCHING VOLTAGE	Max. Vac	175
SWITCHING CURRENT	Max. A	0.5
SWITCHING CAPACITY (RESISTIVE)	Max. VA	5
CONTACT RESISTANCE	Max. mΩ	150
SWITCHING DISTANCE	Min. mm	5.0
OPERATING TEMPERATURE	Deg. °C	-20° + 70°
STORAGE TEMPERATURE	Deg. °C	-25° + 70°
CASE MATERIAL		Polystyrene

### RECTANGULAR MAGNETIC PROXIMITY SWITCHES

PART NUMBER  
**PSB 175/30**

Rev. No.	Revision Note	Date	Signature
C	Web Site 1999	1-5-99	RG

The Comus Group of Companies consist of:  
 Assemtech Europe Limited  
 E. Bachem GmbH  
 Comus International  
 W. Gunther GmbH  
 Gunther Belgium  
 Gunther France

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and details of our full design and manufacturing service. All products are supplied to our standard conditions of sale otherwise agreed in writing.

