



KV1450

VARIABLE CAPACITANCE DIODE

FEATURES

- Very Low Series Resistance
- Excellent Linearity (CV Curve)
- Large Capacitance Ratio ($A1 = 4.60$ minimum)
- Two Diodes in a Miniature Package (SOT23-3)
- Very Small Capacitance Deviation at Tape/Reel

DESCRIPTION

The KV1450 variable capacitance diode was specially made to be used as tuning elements in car radios, radio cassettes, stereos, and other consumer radios. The KV1450 is suitable for wide band tuning from 76 to 108 MHz.

If the KV450 is used only for FM reception, it is possible to operate it at 4.5 V so it is very useful in lowering the power demands of the set.

The KV1450 is available in the miniature SOT23-3 package.

CLASSIFICATION

(Unit: pF)

RANK		1	2	3	4	5
C	MIN	59.15	60.30	61.50	62.75	64.00
	MAX	60.90	62.10	63.35	64.65	65.90

ORDERING INFORMATION


KV1450 □□

Tape/Reel Code

TAPE/REEL CODE
TL: Tape Left

APPLICATIONS

- FM Radio
- Voltage Controlled Oscillator

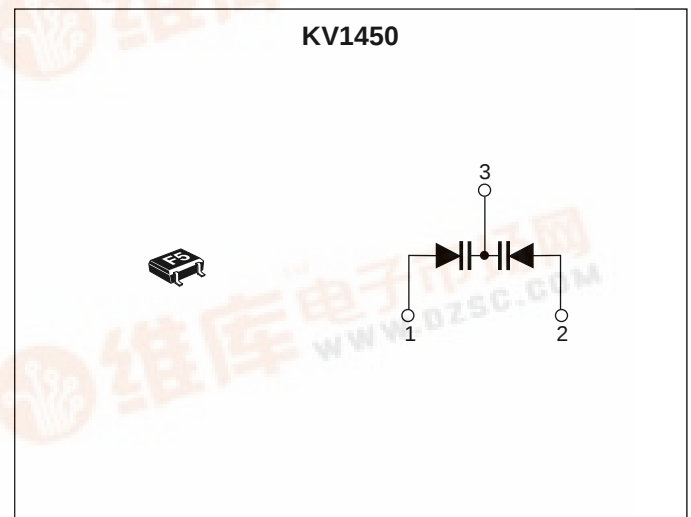

KV1450

ABSOLUTE MAXIMUM RATINGS

Reverse Voltage 18 V Storage Temperature Range -55 to +150 °C
Forward Current 50 mA Operating Temperature Range -55 to +85 °C
Power Dissipation 100 mW Lead Soldering Temperature (10 s) 235 °C

ELECTRICAL CHARACTERISTICS







Test conditions: $T_A = 25\text{ °C}$

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
V_{REV}	Reverse Voltage	$I_{REV} = 10\text{ }\mu\text{A}$	16			V
I_{REV}	Reverse Current	$V_{REV} = 10.0\text{ V}$			100	nA
C_1	Diode Capacitance 1	$V_{REV} = 1.0\text{ V}$, $f = 1\text{ MHz}$	59.15	62.50	65.90	pF
C_6	Diode Capacitance 6	$V_{REV} = 6.0\text{ V}$, $f = 1\text{ MHz}$	17.67		23.54	pF
C_9	Diode Capacitance 9	$V_{REV} = 9.0\text{ V}$, $f = 1\text{ MHz}$	10.77		13.26	pF
Q	Quality Factor	$V_{REV} = 3.0\text{ V}$, $f = 100\text{ MHz}$	60			
A1	Capacitance Ratio	C_1 / C_9	4.60			

Note 1: Diode Capacitance measured with HP 4279A or equivalent instruments (at OSC level 20 mVrms, $\pm 5\text{ mVrms}$).

Note 2: Quality Factor measured with HP 4191A or equivalent instruments.





TYPICAL PERFORMANCE CHARACTERISTICS

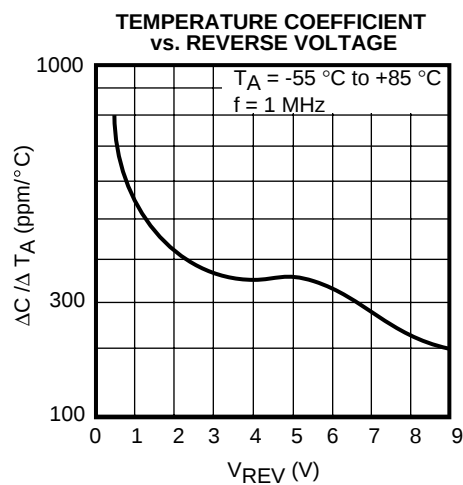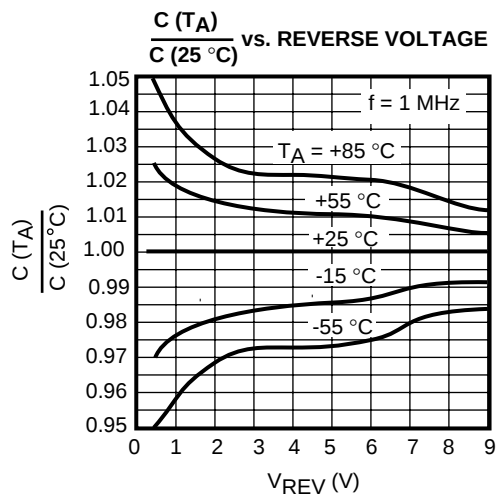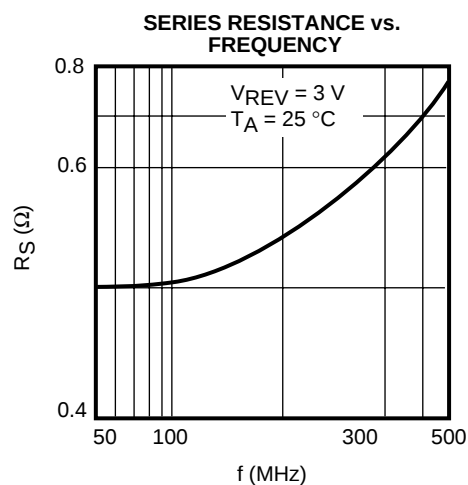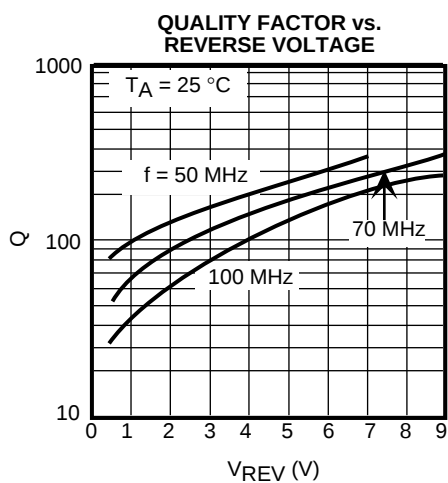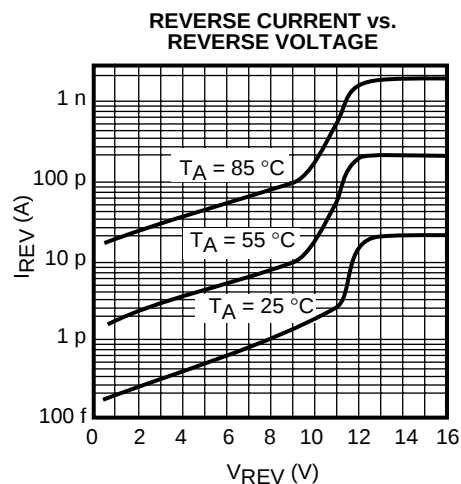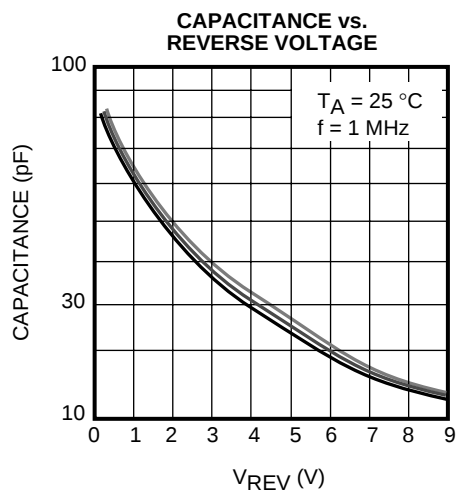

KV1450

PACKAGE OUTLINE

SOT23-3

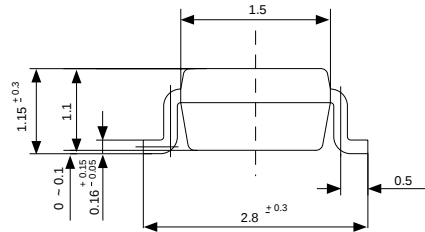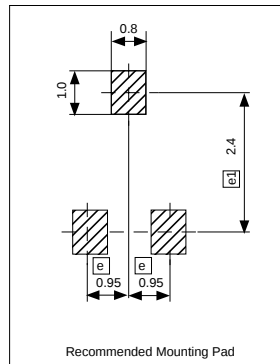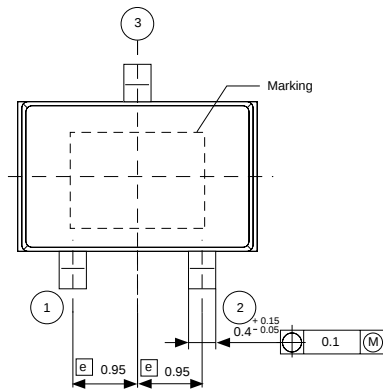

Dimensions are shown in millimeters
Tolerance: x.x = ± 0.2 mm (unless otherwise specified)

Marking Information

Product Code F5



Toko America, Inc. Headquarters
1250 Feehanville Drive, Mount Prospect, Illinois 60056
Tel: (847) 297-0070 Fax: (847) 699-7864

TOKO AMERICA REGIONAL OFFICES

Midwest Regional Office
Toko America, Inc.
1250 Feehanville Drive
Mount Prospect, IL 60056
Tel: (847) 297-0070
Fax: (847) 699-7864

Western Regional Office
Toko America, Inc.
2480 North First Street, Suite 260
San Jose, CA 95131
Tel: (408) 432-8281
Fax: (408) 943-9790

Eastern Regional Office
Toko America, Inc.
107 Mill Plain Road
Danbury, CT 06811
Tel: (203) 748-6871
Fax: (203) 797-1223

Semiconductor Technical Support
Toko Design Center
4755 Forge Road
Colorado Springs, CO 80907
Tel: (719) 528-2200
Fax: (719) 528-2375

Visit our Internet site at <http://www.tokoam.com>

The information furnished by TOKO, Inc. is believed to be accurate and reliable. However, TOKO reserves the right to make changes or improvements in the design, specification or manufacture of its products without further notice. TOKO does not assume any liability arising from the application or use of any product or circuit described herein, nor for any infringements of patents or other rights of third parties which may result from the use of its products. No license is granted by implication or otherwise under any patent or patent rights of TOKO, Inc.