



Series PRG

150Amp • 120/240, 480 Vac • AC Output

- Zero Voltage and Random Turn-On Switching
- Extra High Steady-State Current
- Panel Mount
- Internal Snubber

Featuring state-of-the-art Surface Mount Technology, this SPST-NO relay delivers proven reliability in the most demanding applications. Output consists of an SCR AC switch and is available in zero-cross and random turn-on (phase controllable) versions.

Manufactured in Crydom's ISO 9002 Certified facility for optimum product performance and reliability.

MODEL NUMBERS	DC CONTROL AC CONTROL	PRGD24150 PRGA24150	PRGD48150 PRGA48150
OUTPUT SPECIFICATIONS ①			
Operating Voltage (47-63 Hz) [Vrms]		24-280	48-530
Load Current Range ③ [Arms]		.15-150	.15-150
Transient Overvoltage [Vpk]		600	1200
Max. Surge Current, (16.6ms) [Apk]		1750	1750
Max. On-State Voltage Drop @Rated Current [Vpk]		1.7	1.7
Thermal Resistance Junction to Case (R _{θJC}) [°C/W]		0.15	0.15
Maximum I ² t for Fusing, (8.3 msec.) [A ² sec]		12,700	12,700
Max. Off-State Leakage Current @Rated Voltage [mArms]		5	5
Min. Off-State dv/dt @Max. Rated Voltage [V/μsec] ②		500	500
Max. Turn-On Time ④		1/2 cycle (DC Control), 10 msec (AC Control)	
Max. Turn-Off Time		1/2 cycle (DC Control), 40 msec (AC Control)	
Power Factor (Min.) with Max. Load		0.5	0.5

INPUT SPECIFICATIONS ①	DC (240V Models)	DC (480V Models)	AC
Control Voltage Range	3-15 Vdc	4-15 Vdc	90-140 Vac
Max. Turn-On Voltage	3.0 Vdc	4.0 Vdc	90 Vac
Min. Turn-Off Voltage	1.0 Vdc	1.0 Vdc	10 Vac
Nominal Input Impedance	300 Ohms	300 Ohms	14.1 Ohms
Typical Input Current	15 mA @5 Vdc	15 mA @5 Vdc	10 mA @120 Vac

GENERAL NOTES

©1998 CRYDOM CORP, Specifications subject to change without notice.

- ① All parameters at 25°C and per section unless otherwise specified.
- ② Off-State dv/dt test method per EIA/NARM standard RS-443, paragraph 13.11.1
- ③ Heat sinking required, see derating curves on page 2.
- ④ Turn-On time for Random versions is 0.02 msec. (DC Control Models).

For recommended applications and more information contact:

USA: (800) 8 CRYDOM • (800) 827-9366 • (619) 715-7200 • fax (619) 715-7280
 Crydom Corp, 9525 Chesapeake Drive, San Diego, CA 92123 • e-mail: sales@crydom.com
 WEB SITE: <http://www.crydom.com> FASTFAX Product Information: (888) 267-9191
 UK: (44)1202 812300 • fax (44)1202 812340 Crydom International Ltd., 85, Condor Close,
 Woolsbridge Industrial Estate, Three-Legged Cross, Wimborne, Dorset, England BH21 6SU
 GERMANY: (49) (0)6874 182580 • fax (49)(0)6874 182585 Crydom GmbH,
 Gewerbegebiet Im Schachen, D-66687 Nunkirchen, Germany • e-mail: vertrieb@crydom.com





Series PRG

150Amp • 120/240, 480 Vac • AC Output



GENERAL SPECIFICATIONS

Dielectric Strength (min.)	4000 Vac
Insulation Resistance (Min.) @500 Vdc	10 ¹⁰ Ohm
Max. Capacitance Input/Output	10 pF
Ambient Operating Temperature Range	-30 to 80°C
Ambient Storage Temperature Range	-40 to 125°C


MECHANICAL SPECIFICATIONS

Weight: (typical)	12 oz. (340g)
Encapsulation:	Thermally Conductive Epoxy
Power Terminals:	M5 Screws Furnished, Mounted
Control Terminals:	.050 x .020 Square Pins

CURRENT DERATING CURVES

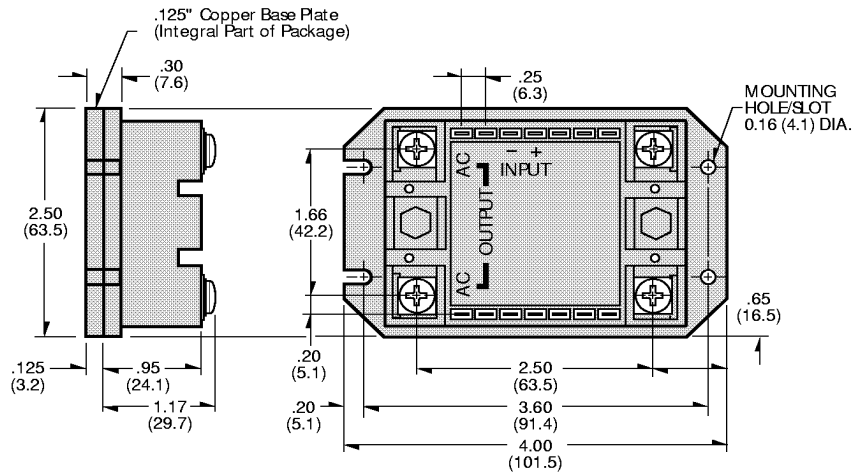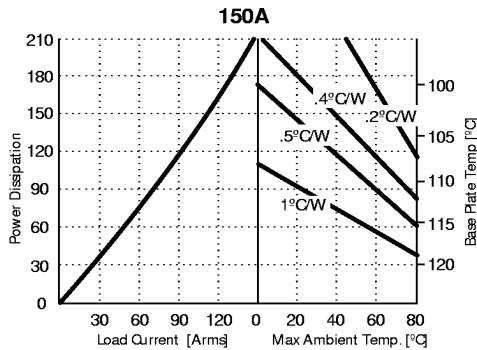

PIN DETAIL



All dimensions are in inches (millimeters)

Crydom Heat Sinks offer excellent thermal management and are perfectly matched to the load current ratings of Crydom panel mount relays. Request Crydom's Heat Sink specification sheet for all the details.

AVAILABLE OPTIONS

- 10 Random Turn-On (AC & DC Control)
Phase Controllable (DC Control)
Example: **PRGA24150-10**

©1998 CRYDOM CORP, Specifications subject to change without notice.

APPROVALS

PENDING



For recommended applications and more information contact:

USA: (800) 8 CRYDOM • (800) 827-9366 • (619) 715-7200 • fax (619) 715-7280
Crydom Corp, 9525 Chesapeake Drive, San Diego, CA 92123 • e-mail: sales@crydom.com
WEB SITE: <http://www.crydom.com> **FASTFAX Product Information:** (888) 267-9191
UK: (44)1202 812300 • fax (44)1202 812340 Crydom International Ltd., 85, Condor Close,
Woolsbridge Industrial Estate, Three-Legged Cross, Wimborne, Dorset, England BH21 6SU
GERMANY: (49) (0)6874 182580 • fax (49)(0)6874 182585 Crydom GmbH,
Gewerbegebiet Im Schachen, D-66687 Nunkirchen, Germany • e-mail: vertrieb@crydom.com

