	No.2733	<b>LA7270, 7270M</b>
		Monolithic Linear IC VHS VTR Playback Head Amplifier Recording Amplifier (Hi-Fi Audio Use)

**Functions and Features**

(Functions) · 2-channel playback head amp

- 1-channel recording amp
- PB : 1 head select switch
- REC : 2 head select switches

(Features) · Designed for 2 heads

- On-chip driver transistor permitting direct recording (current type)
- On-chip head select switches (2 types) facilitating printed circuit pattern design of a set
- Load variations cause less recording current variations because of recording amp of constant-current type.

(Maximum recording current : 60mA<sub>p-p</sub>)


**Maximum Ratings at Ta = 25°C**

Parameter	Symbol	Value	unit
Maximum Supply Voltage	V <sub>CC max</sub>	(PB) 7.0 (REC) 14.0	V
Allowable Power Dissipation	P <sub>d max</sub>	(DIP) 840	mW
Operating Temperature	T <sub>opg</sub>	-10 to +65	°C
Storage Temperature	T <sub>stg</sub>	-40 to +150	°C


**Operating Conditions at Ta = 25°C**

Parameter	Symbol	Value	unit
Recommended Supply Voltage	V <sub>CC</sub>	(PB) 5.0 (REC) 12.0	V
Operating Voltage Range	V <sub>CC op</sub>	(PB) 4.5 to 5.5 (REC) 10 to 13	V

**Case Outline 3059-D22SIC**  
(unit : mm) [LA7270]

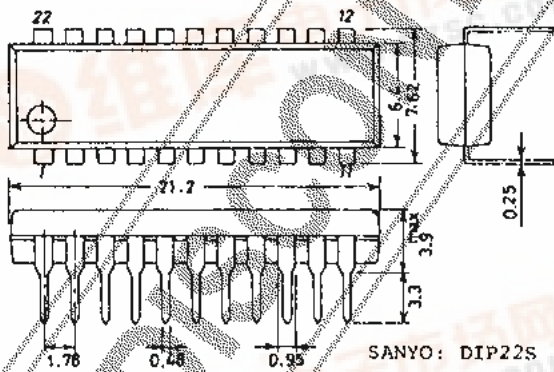

**Case Outline 3108-M24IC**  
(unit : mm) [LA7270M]

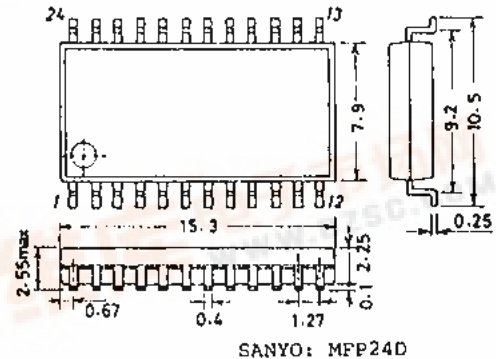

The application circuit diagrams and circuit constants herein are included as an example and provide no guarantee for designing equipment to be mass-produced.  
The information herein is believed to be accurate and reliable. However, no responsibility is assumed by SANYO for its use; nor for any infringements of patents or other rights of third parties which may result from its use.




Specifications and information herein are subject to change without notice.

**SANYO Electric Co., Ltd. Semiconductor Overseas Marketing Div.**  
Natsume Bldg. 18-6 2-chome Yushima Bunkyo-ku TOKYO 113 JAPAN

# LA7270, 7270M

## LA7270 Test Circuit

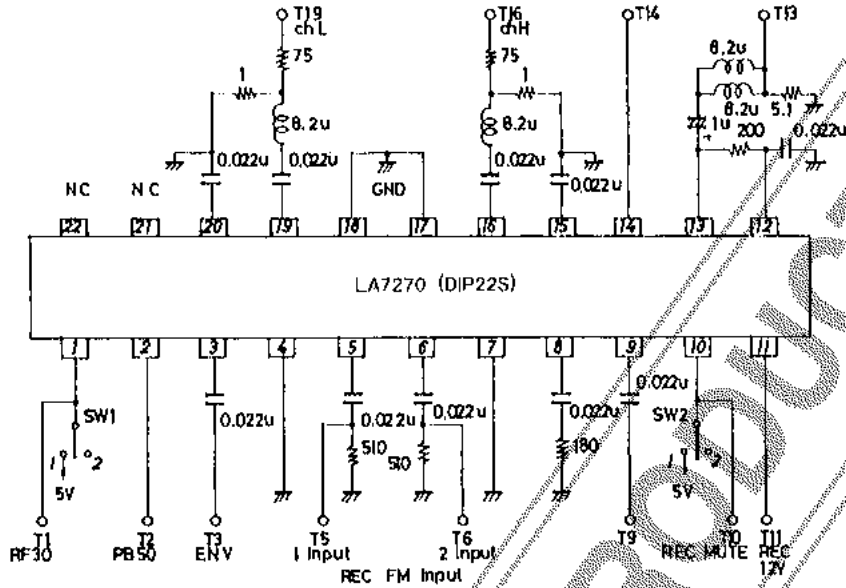

### Operating Characteristics at $T_a = 25^\circ\text{C}$

Characteristic	Symbol	Test Conditions		min	typ	max	unit		
		Input	Output						
(PB Mode)		T2							
Current Dissipation	$I_{ccp}$	T2		PB + 5V					
Voltage Gain	CH1 $G_{VP(1)}$	T19	T3	RF	REC MUTE	9	12	15	mA
	CH2 $G_{VP(2)}$	T16	T3	1		56.5	69.5	62.5	dB
Voltage Gain Difference	$\Delta G_{VP}$								
Equivalent Input Noise Voltage	CH1 $V_{NI(1)}$		T3						
	CH2 $V_{NI(2)}$		T3						
Frequency Characteristic	CH1 $\Delta V_{fp(1)}$	T19	T3						
	CH2 $\Delta V_{fp(2)}$	T16	T3						
2nd Harmonic Distortion	CH1 $V_{HDP(1)}$	T19	T3						
	CH2 $V_{HDP(2)}$	T6	T3						
Maximum Output Level	CH1 $V_{OMP(1)}$	T19	T3						
	CH2 $V_{OMP(2)}$	T16	T3						
Crosstalk	CH1 $V_{CR(1)}$	T16	T3						
	CH2 $V_{CR(2)}$	T16	T3						
Output DC Offset	$\Delta V_{Odc}$		Pin 3						

LA7270, 7270M

Continued from preceding page.

Characteristic		Symbol	Input		Test Conditions	SW		min	typ	max	unit
			Input	Output		SW1	SW2				
(REC Mode)			T11		REC + 12V	RF	REC MUTE				
Current Dissipation		I <sub>ccR</sub>	T11		Pin 11 flow-in current		2	54.0	64.0		mA
Voltage Gain	1	G <sub>VR(1)</sub>	T6	T13	V <sub>i</sub> = 300mVpp f = 2MHz		2	-8.0	-6.0	-4.0	dB
	2	G <sub>VR(2)</sub>	T6	T13	V <sub>i</sub> = 300mVpp f = 2MHz		2	-8.0	-6.0	-4.0	
Frequency Characteristic	1	ΔV <sub>IR(1)</sub>	T6	T13	V <sub>i</sub> = 300mVpp f = 1MHz, 2MHz		2	1.0	0.5	1.0	dB
	2	ΔV <sub>IR(2)</sub>	T6	T13	2M 1M output ratio		2				
2nd Harmonic Distortion	1	V <sub>HDR(1)</sub>	T6	T13	V <sub>out</sub> = 50mApp f = 2MHz		2				dB
	2	V <sub>HDR(2)</sub>	T6	T13	4M, 6M component 2M component output ratio		2	-40	-35		
Maximum Output Level	1	V <sub>OMP(1)</sub>	T6	T13	f = 2MHz		2	40	50		mApp
	2	V <sub>OMP(2)</sub>	T6	T13	Output level when 2nd distortion is -40dB.		2				
Muting Attenuation	1	V <sub>MR(1)</sub>	T6	T13	V <sub>i</sub> = 300mVpp f = 2MHz V <sub>out</sub>		1				dB
	2	V <sub>MR(2)</sub>	T6	T13	G <sub>VR(1),(2)</sub> output ratio		1	-50	-45		
Y/C MIX Amp Voltage Gain	1	G(1)	T6	T9	V <sub>i</sub> = 300mVpp f = 2MHz			8.0	10.5	13.0	dB
	2	G(2)	T6	T9	V <sub>i</sub> = 300mVpp f = 2MHz						
(Switch Tr) ON Resistance											
ON Resistance of SW turned ON at PB		R <sub>PON(14)</sub>		Pin 14	PI mode *1 Difference between DC voltage at 1mA flow-in and DC voltage at 2mA flow-in				6	10	Ω
ON Resistance of SW turned ON at REC	CH1	R <sub>HON(19)</sub>		Pin 19	REC mode *1 Difference between DC voltage at 1mA flow-in and DC voltage at 2mA flow-in				7	10	Ω
	CH2	R <sub>HON(16)</sub>		Pin 16							
Switch Tr Leakage Current											
Leakage Current of SW Tr turned ON at PB		I <sub>L(14)</sub>		Pin 14	REC mode Flow-in current when ±5V is applied			-2	0	2	μA

Continued on next page.


## LA7270, 7270M

Continued from preceding page.

Characteristic	Symbol	Input/Output		Test Conditions	SW1	SW2	min	typ	max	unit
		Input	Output							
Control Pin (Threshold Level)										
RF Switch (Threshold Level)	SW RF(1)	T1		CH1→CH2 changeover voltage	*		2.6		5.0	V
	SW RF(2)			CH2→CH1 changeover voltage			0	0.8		
REC Muting Switch Threshold Level	SW MUTE(1)	T10		T10 voltage when T13 output waveform disappears	*		2.6		5.0	V
	SW MUTE(2)			T10 voltage when T13 output waveform appears			0	0.8		


※1 Let the ON resistance to be obtained by  $x$ ,  $2x$ (mV) at 2mA flow-in  $x$ (mV) at 1mA flow-in  
Therefore, difference  $2x - x = x$  is the ON resistance.

### LA7270 (DIP22S) Block Diagram

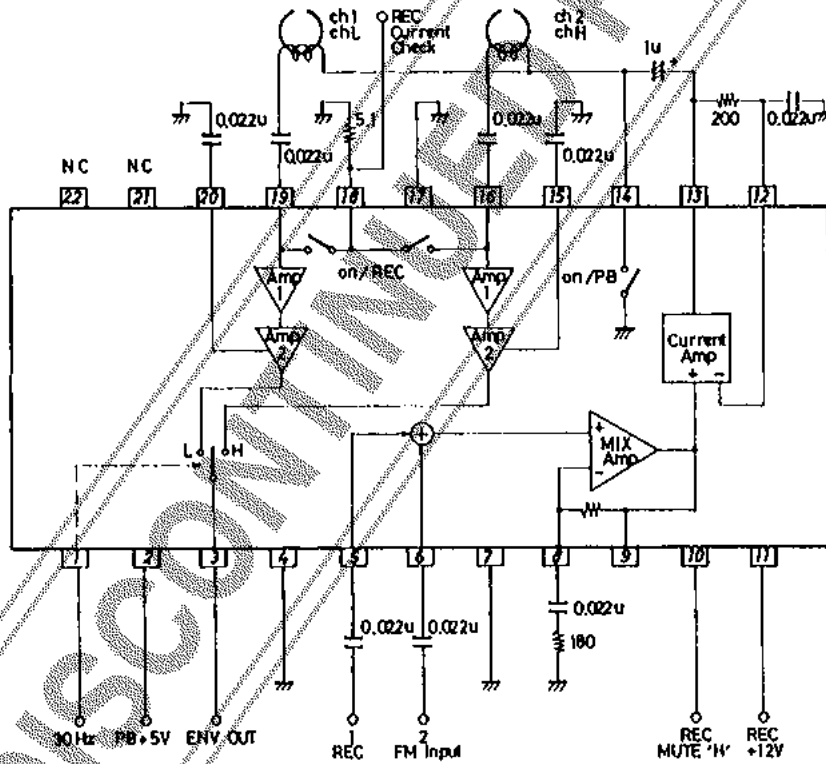

# LA7270, 7270M

## LA7270M (MFP24) Block Diagram

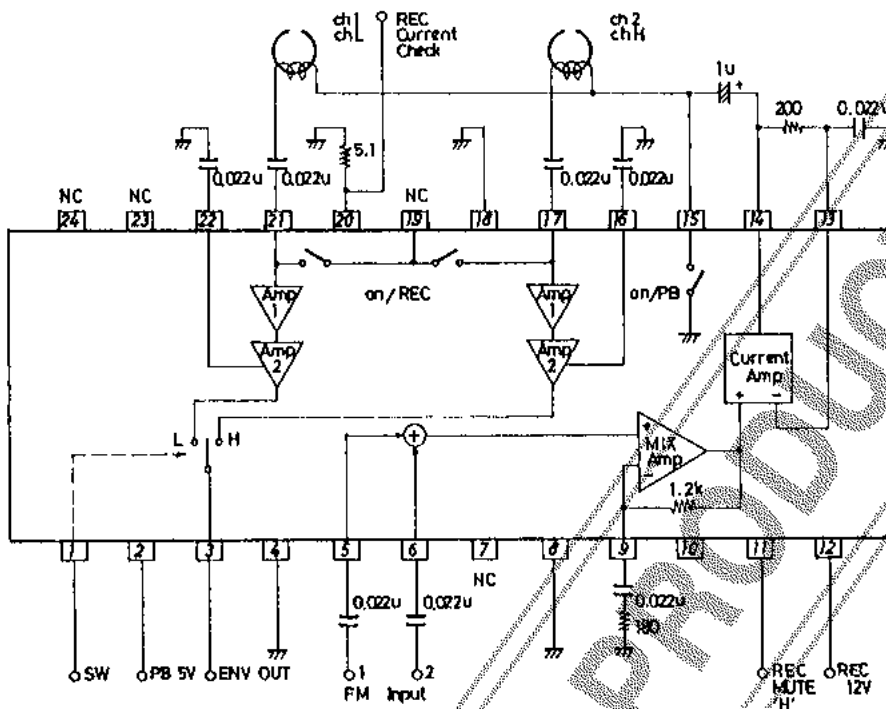






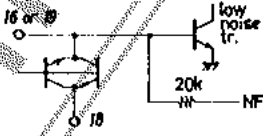
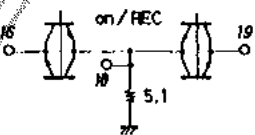
### Pin Description

Pin No.	Function	Standard Potential	Input/Output Configuration	Remarks
1	RF 30Hz control pin			"L": CH1 at open state or 0.8V or less "H": CH2 at 2.5 to 5.0V
2	PB+5V	5.0 (V)		12mA typ.
3	Preamp output	2.3 (V)		Connect R=2kΩ externally when the output line is routed around.
4	Preamp GND	0 (V)		
5	REC amp input	6.7 (V)		
6				
7	REC amp GND	0 (V)		
8	REC Y/C MIX amp feedback pin	5.9 (V)		The gain of Y/C MIX amp depends on R1. (Example) R1: 180Ω = 10.5dB
9	REC Y/C MIX amp output	5.9 (V)		

Continued on next page.

LA7270, 7270M

Continued from preceding page.

Pin No.	Function	Standard Potential	Input/Output Configuration	Remarks
10	REC muting control pin			"L": Muting OFF at open state or 0.8V or less "H": Muting ON at 2.5V to 5.0V
11	REC +12V	12.0 (V)		Typ.
12	REC current amp feedback pin	5.9 (V)		
13	REC current amp output pin	5.9 (V)		Max. REC current: 60mA p-p (2ch)
14	Pin for switch Tr turned ON at PB			ON resistance : 6 to 10kΩ
15 22	Preamp bypass capacitor	1.9 (V)		
16 19	Preamp input	0.65 (V)		$R_{in} \approx 400\Omega$ $C_{in} \approx 25$ to $35p$
17	Pre GND	0 (V)		
18				Switch Tr ON resistance : 7 to 10Ω
21 22	N.C			