

December 1994

# LM3045/LM3046/LM3086 Transistor Arrays

### **General Description**

The LM3045, LM3046 and LM3086 each consist of five general purpose silicon NPN transistors on a common monolithic substrate. Two of the transistors are internally connected to form a differentially-connected pair. The transistors are well suited to a wide variety of applications in low power system in the DC through VHF range. They may be used as discrete transistors in conventional circuits however, in addition, they provide the very significant inherent integrated circuit advantages of close electrical and thermal matching. The LM3045 is supplied in a 14-lead cavity dual-in-line package rated for operation over the full military temperature range. The LM3046 and LM3086 are electrically identical to the LM3045 but are supplied in a 14-lead molded dual-in-line package for applications requiring only a limited temperature range.

### **Features**

- Two matched pairs of transistors

  V<sub>BE</sub> matched ±5 mV

  Input offset current 2 µA max at I<sub>C</sub> = 1 mA
- Five general purpose monolithic transistors
- Operation from DC to 120 MHz
- Wide operating current rangeLow noise figure
  - 3.2 dB typ at 1 kHz
- Full military

temperature range (LM3045)


-55°C to +125°C

## **Applications**

- General use in all types of signal processing systems operating anywhere in the frequency range from DC to VHF
- Custom designed differential amplifiers
- Temperature compensated amplifiers

## Schematic and Connection Diagram

### **Dual-In-Line and Small Outline Packages**

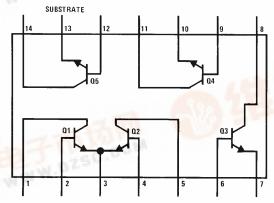

**Top View** 

TL/H/7950-1

Order Number LM3045J, LM3046M, LM3046N or LM3086N See NS Package Number J14A, M14A or N14A

©1995 National Semiconductor Corporation

RRD-B30M115/Printed in U. S. A.



# Absolute Maximum Ratings $(T_A = 25^{\circ}C)$

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/
Distributors for availability and specifications.

LM3045

LM3046/LM3086

	LIVIO	U4 <b>3</b>	LIVI3U40/	LIVISUOD	
	Each	Total	Each	Total	Units
	Transistor	Package	Transistor	Package	
Power Dissipation:					
$T_A = 25^{\circ}C$	300	750	300	750	mW
$T_A = 25^{\circ}C \text{ to } 55^{\circ}C$			300	750	mW
$T_{A} > 55^{\circ}C$			Derate a	mW/°C	
$T_A = 25^{\circ}C \text{ to } 75^{\circ}C$	300	750			mW
$T_A > 75$ °C	Derate	e at 8			mW/°C
Collector to Emitter Voltage, V <sub>CEO</sub>	15		15		V
Collector to Base Voltage, V <sub>CBO</sub>	20		20		V
Collector to Substrate Voltage, V <sub>CIO</sub> (Note 1)	20		20		V
Emitter to Base Voltage, V <sub>EBO</sub>	5		5		V
Collector Current, I <sub>C</sub>	50		50		mA
Operating Temperature Range	-55°C to +125°C		-40°C to		
Storage Temperature Range	−65°C to	+150°C	−65°C to	+85°C	
Soldering Information					
Dual-In-Line Package Soldering (10 Sec.)	260°C		260°C		
Small Outline Package			2.50		

Vapor Phase (60 Seconds)215°CInfrared (15 Seconds)220°C

See AN-450 "Surface Mounting Methods and Their Effect on Product Reliability" for other methods of soldering surface mount devices.


# $\textbf{Electrical Characteristics} \ \, (T_{A} = 25^{\circ}\text{C unless otherwise specified})$


	Conditions	Limits LM3045, LM3046			Limits LM3086			Units
Parameter								
		Min	Тур	Max	Min	Тур	Max	
Collector to Base Breakdown Voltage (V <sub>(BR)CBO</sub> )	$I_{C} = 10  \mu A, I_{E} = 0$	20	60		20	60		V
Collector to Emitter Breakdown Voltage (V <sub>(BR)CEO)</sub>	$I_C = 1 \text{ mA}, I_B = 0$	15	24		15	24		V
Collector to Substrate Breakdown Voltage (V <sub>(BR)CIO</sub> )	$I_{C} = 10  \mu A, I_{CI} = 0$	20	60		20	60		٧
Emitter to Base Breakdown Voltage (V <sub>(BR)EBO</sub> )	$I_E 10 \mu A, I_C = 0$	5	7		5	7		V
Collector Cutoff Current (I <sub>CBO</sub> )	$V_{CB} = 10V, I_{E} = 0$		0.002	40		0.002	100	nA
Collector Cutoff Current (I <sub>CEO</sub> )	$V_{CE} = 10V, I_{B} = 0$			0.5			5	μΑ
Static Forward Current Transfer	$V_{CE} = 3V \\ \begin{cases} I_{C} = 10 \text{ mA} \\ I_{C} = 10 \mu\text{A} \end{cases}$		100			100		
Ratio (Static Beta) (h <sub>FE</sub> )	$I_{C} = 1 \text{ mA}$	40	100		40	100		
	$l_{\rm C} = 10 \mu A$		54			54		
Input Offset Current for Matched Pair $Q_1$ and $Q_2$ $ I_{O1} - I_{IO2} $	$V_{CE} = 3V$ , $I_{C} = 1$ mA		0.3	2				μΑ
Base to Emitter Voltage (V <sub>BE</sub> )	$V_{CE} = 3V$ $\int I_{E} = 1 \text{ mA}$		0.715			0.715		V
	$V_{CE} = 3V$ $\begin{cases} I_E = 1 \text{ mA} \\ I_E = 10 \text{ mA} \end{cases}$		0.800			0.800		V
Magnitude of Input Offset Voltage for Differential Pair $ V_{BE1} - V_{BE2} $	$V_{CE} = 3V$ , $I_{C} = 1$ mA		0.45	5				mV
Magnitude of Input Offset Voltage for Isolated Transistors  V <sub>BE3</sub> - V <sub>BE4</sub>  ,  V <sub>BE4</sub> - V <sub>BE5</sub>  ,  V <sub>BE5</sub> - V <sub>BE3</sub>	$V_{CE} = 3V$ , $I_C = 1$ mA		0.45	5				mV
Temperature Coefficient of Base to Emitter Voltage $\left(\frac{\Delta V_{BE}}{\Delta T}\right)$	$V_{CE} = 3V$ , $I_{C} = 1$ mA		-1.9			-1.9		mV/°C
Collector to Emitter Saturation Voltage (V <sub>CE(SAT)</sub> )	$I_B = 1 \text{ mA}, I_C = 10 \text{ mA}$		0.23			0.23		V
Temperature Coefficient of Input Offset Voltage $\left(\frac{\Delta V_{10}}{\Delta T}\right)$	$V_{CE} = 3V$ , $I_{C} = 1$ mA		1.1					μV/°C

Note 1: The collector of each transistor of the LM3045, LM3045, and LM3086 is isolated from the substrate by an integral diode. The substrate (terminal 13) must be connected to the most negative point in the external circuit to maintain isolation between transistors and to provide for normal transistor action.

Parameter	Conditions	Min	Тур	Max	Units
Low Frequency Noise Figure (NF)	$ f = 1 \text{ kHz}, V_{CE} = 3V, $ $I_{C} = 100  \mu\text{A}, R_{S} = 1 \text{ k}\Omega $		3.25		dB
LOW FREQUENCY, SMALL SIGNAL EQUIVALEN	IT CIRCUIT CHARACTERIS	TICS			
Forward Current Transfer Ratio (hfe)	$ f = 1 \text{ kHz}, V_{CE} = 3V, $ $I_{C} = 1 \text{ mA} $		110 (LM3045, LM3046) (LM3086)		
Short Circuit Input Impednace (hie)			3.5		kΩ
Open Circuit Output Impedance (hoe)			15.6		μmho
Open Circuit Reverse Voltage Transfer Ratio (hre)			1.8 x 10 <sup>−4</sup>		
ADMITTANCE CHARACTERISTICS					
Forward Transfer Admittance (Yfe)	$f = 1 MHz, V_{CE} = 3V,$		31 — j 1.5		
Input Admittance (Yie)	$I_C = 1 \text{ mA}$		0.3 + J 0.04		
Output Admittance (Yoe)			0.001 + j 0.03		
Reverse Transfer Admittance (Yre)			See Curve		
Gain Bandwidth Product (f <sub>T</sub> )	$V_{CE} = 3V, I_{C} = 3 \text{ mA}$	300	550		
Emitter to Base Capacitance (CEB)	$V_{EB} = 3V, I_{E} = 0$		0.6		pF
Collector to Base Capacitance (C <sub>CB</sub> )	$V_{CB} = 3V, I_{C} = 0$		0.58		pF
Collector to Substrate Capacitance (C <sub>Cl</sub> )	$V_{CS} = 3V, I_{C} = 0$		2.8		pF


# **Typical Performance Characteristics**






**Typical Collector To Emitter** 


**Cutoff Current vs Ambient** 




**Typical Static Forward** 

TL/H/7950-2







TL/H/7950-3

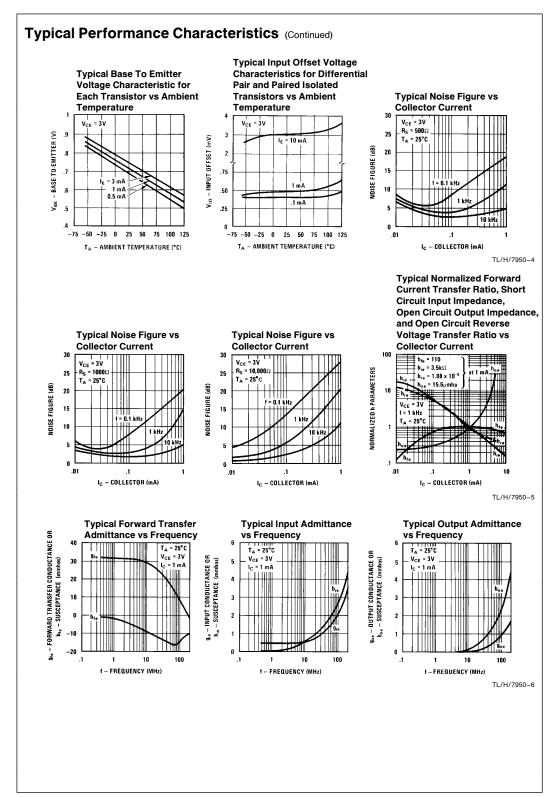


# **Typical Performance Characteristics** (Continued)






TL/H/7950-7


# Physical Dimensions inches (millimeters)

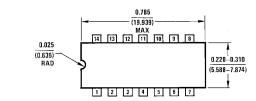


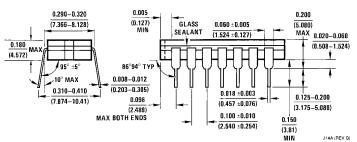


Ceramic Dual-In-Line Package (J) Order Number LM3045J NS Package Number J14A


## Physical Dimensions inches (millimeters) (Continued)







### Molded Small Outline Package (M) Order Number LM3046M NS Package Number M14A

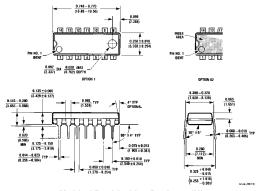

Molded Dual-In-Line Package (N) Order Number LM3046N or LM3086N NS Package Number N14A

### LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation 1111 West Bardin Road Arlington, TX 76017 Tel: 1(800) 272-9959 Fax: 1(800) 737-7018 National Semiconductor Europe

Fax: (+49) 0-180-530 85 86 Email: onlyge@tevm2.nsc.com
Deutsch Tel: (+49) 0-180-530 85 85 English Tel: (+49) 0-180-532 78 32 Français Tel: (+49) 0-180-532 78 32 Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd. 13th Floor, Straight Block, Ocean Centre, 5 Canton Rd. Tsimshatsui, Kowloon Hong Kong Tel: (852) 2737-1600 Fax: (852) 2736-9960 National Semiconductor Japan Ltd. Tel: 81-043-299-2309 Fax: 81-043-299-2408