

**5-BIT SHIFT REGISTER**

**DESCRIPTION**

The M74LS96P is a semiconductor integrated circuit containing a 5-bit serial/parallel input-serial/parallel output shift register function.

**FEATURES**

- Positive edge-triggering
- Right shift function
- Asynchronous parallel input provided
- Direct reset input provided
- Wide operating temperature range ( $T_a = -20 \sim +75^\circ\text{C}$ )

**APPLICATION**

General purpose, for use in industrial and consumer equipment.

**FUNCTIONAL DESCRIPTION**


This 5-bit shift register is composed with 4 R-S-T flip-flops and it functions as a serial/parallel input-serial/parallel output shift register.

For use as a serial input-serial/parallel output shift register, the load input LOAD or parallel data inputs  $S_{D0} \sim S_{D4}$  are kept in high and the data are applied to the serial data input  $D_S$ . When a clock pulse is applied to clock input T with  $D_S$  in high, the high signal is shifted sequentially to  $Q_0, Q_1 \dots Q_4$ . Shifting is performed when T changes from low to high. When the serial data are applied to  $D_{S0} \sim D_{S4}$  and LOAD is set high, the  $S_{D0} \sim S_{D4}$  signals appear in  $Q_0 \sim Q_4$  respectively irrespective of T.

When direct reset input  $\overline{R_D}$  is set low,  $Q_0 \sim Q_4$  are set low if LOAD is low irrespective of the other input signals.


When LOAD is high, parallel reading takes precedence, and the  $S_{D0} \sim S_{D4}$  signals appear in  $Q_0 \sim Q_4$ .

**PIN CONFIGURATION (TOP VIEW)**

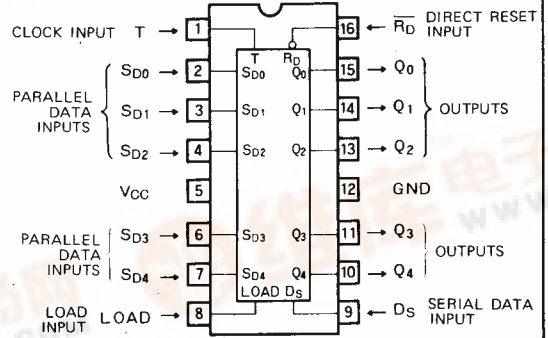

Outline 16P4

**BLOCK DIAGRAM**

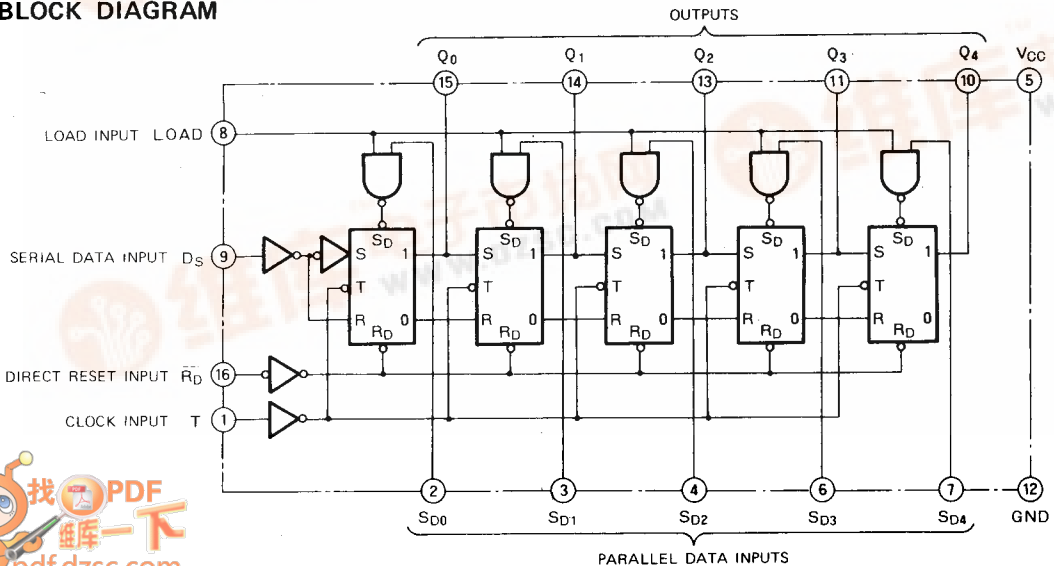

**MITSUBISHI LSTTLs**  
**M74LS96P**

**5-BIT SHIFT REGISTER**

**FUNCTION TABLE** (Note 1)

**SERIAL INPUT-PARALLEL OUTPUT**

	$t_n$	$t_{n+1}$	$t_{n+2}$	$t_{n+3}$	$t_{n+4}$	$t_{n+5}$	$t_{n+6}$
$D_S$	L	H	L	H	L	H	L
$Q_0$	*	L	H	L	H	L	H
$Q_1$	*	*	L	H	L	H	L
$Q_2$	*	*	*	L	H	L	H
$Q_3$	*	*	*	*	L	H	L
$Q_4$	*	*	*	*	*	L	H

Note 1: For use as a serial input-parallel output,  $LOAD$ ,  $S_{D0}$ ,  $S_{D1}$ ,  $S_{D2}$ ,  $S_{D3}$  and  $S_{D4}$  are all kept at low and  $\overline{RD}$  is kept at high.

$t_n$ : Bit time prior to clock

$t_{n+1}$ : Bit time after application of 1 clock pulse

$t_{n+6}$ : Bit time after application of 6 clock pulses

\* : Cannot be predicted

**PARALLEL INPUT-PARALLEL OUTPUT**

$LOAD$	$S_{D(N)}$	$\overline{RD}$	$Q(N)$
L	L	L	L
L	L	H	$Q^0$
L	H	L	L
L	H	H	$Q^0$
H	L	L	L
H	L	H	$Q^0$
H	H	L	H
H	H	H	H


Note 2: For use as a parallel input-parallel output,  $\overline{RD}$  is first set low and kept at high. The parallel input data are input into  $S_{D0} \sim S_{D4}$ .

The data are read when  $LOAD$  is high and they simultaneously appear in the outputs.  $\overline{RD}$  is usually kept at high and  $LOAD$  at low.

The "N" in  $S_{D(N)}$  refers to 0, 1, 2, 3, 4.

$Q^0$  is the level of Q before the indicated steady-state input conditions were established.

**OPERATION TIMING DIAGRAM**

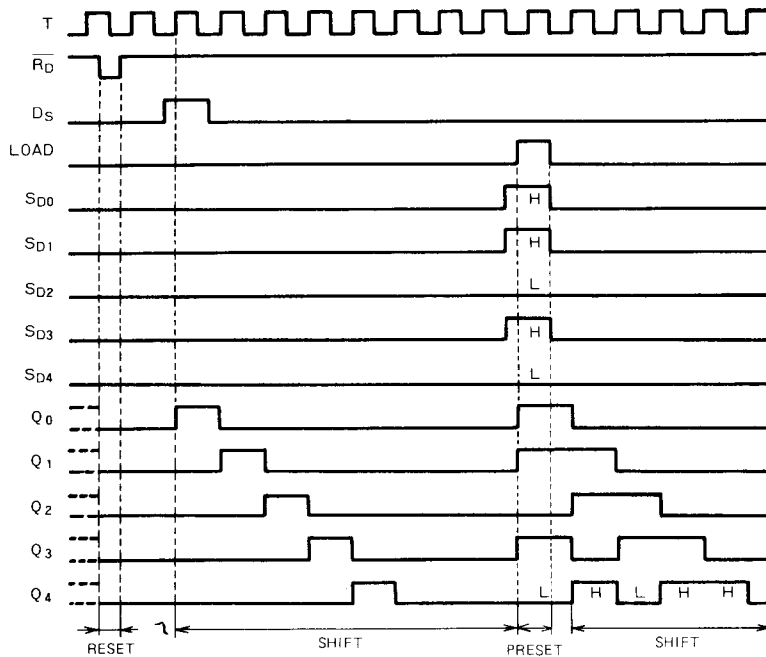

**MITSUBISHI LSTTLs**  
**M74LS96P**

**5-BIT SHIFT REGISTER**

**ABSOLUTE MAXIMUM RATINGS** (Ta = -20 ~ +75°C, unless otherwise noted)

Symbol	Parameter	Conditions	Limits	Unit
V <sub>CC</sub>	Supply voltage		-0.5 ~ +7	V
V <sub>I</sub>	Input voltage		-0.5 ~ +15	V
V <sub>O</sub>	Output voltage	High-level output	-0.5 ~ V <sub>CC</sub>	V
T <sub>opr</sub>	Operating free-air ambient temperature range		-20 ~ +75	°C
T <sub>stg</sub>	Storage temperature		-65 ~ +150	°C

**RECOMMENDED OPERATING CONDITIONS** (Ta = -20 ~ +75°C, unless otherwise noted)

Symbol	Parameter		Limits			Unit
			Min	Typ	Max	
V <sub>CC</sub>	Supply voltage		4.75	5	5.25	V
I <sub>OH</sub>	High-level output current	V <sub>OH</sub> ≥ 2.7V	0		-400	μA
I <sub>OL</sub>	Low-level output current	V <sub>OL</sub> ≤ 0.4V	0		4	mA
		V <sub>OL</sub> ≤ 0.5V	0		8	mA

**ELECTRICAL CHARACTERISTICS** (Ta = -20 ~ +75°C, unless otherwise noted)

Symbol	Parameter		Test conditions	Limits			Unit	
				Min	Typ *	Max		
V <sub>IH</sub>	High-level input voltage			2			V	
V <sub>IL</sub>	Low-level input voltage					0.8	V	
V <sub>IC</sub>	Input clamp voltage		V <sub>CC</sub> = 4.75V, I <sub>IC</sub> = -18mA			-1.5	V	
V <sub>OH</sub>	High-level output voltage		V <sub>CC</sub> = 4.75V, V <sub>I</sub> = 0.8V V <sub>I</sub> = 2V, I <sub>OH</sub> = -400μA	2.7	3.4		V	
V <sub>OL</sub>	Low-level output voltage		V <sub>CC</sub> = 4.75V V <sub>I</sub> = 0.8V, V <sub>I</sub> = 2V	I <sub>OL</sub> = 4mA	0.25	0.4	V	
				I <sub>OL</sub> = 8mA	0.35	0.5	V	
I <sub>IH</sub>	High-level input current	LOAD	V <sub>CC</sub> = 5.25V V <sub>I</sub> = 2.7V			100	μA	
		Other inputs				20		
		LOAD		V <sub>CC</sub> = 5.25V V <sub>I</sub> = 10V			0.5	mA
		Other inputs					0.1	
I <sub>IL</sub>	Low-level input current	LOAD	V <sub>CC</sub> = 5.25V V <sub>I</sub> = 0.4V			-2.0	mA	
		Other inputs				-0.4		
I <sub>OS</sub>	Short-circuit output current (Note 3)		V <sub>CC</sub> = 5.25V, V <sub>O</sub> = 0V	-20		-100	mA	
I <sub>CC</sub>	Supply current		V <sub>CC</sub> = 5.25V (Note 4)		12	20	mA	

\* : All typical values are at V<sub>CC</sub> = 5V, Ta = 25°C.

Note 3: All measurements should be done quickly and not more than one output should be shorted at a time.

Note 4: I<sub>CC</sub> is measured with R<sub>D</sub> at 0V and all the other inputs at 4.5V.

**SWITCHING CHARACTERISTICS** (V<sub>CC</sub> = 5V, Ta = 25°C, unless otherwise noted)


Symbol	Parameter		Test conditions	Limits			Unit
				Min	Typ	Max	
f <sub>max</sub>	Maximum clock frequency		C <sub>L</sub> = 15pF (Note 5)	25	45		MHz
t <sub>PLH</sub>	Low-to-high-level, high-to-low-level output propagation time, from input T to outputs Q <sub>0</sub> ~ Q <sub>4</sub>				12	40	ns
t <sub>PHL</sub>	Low-to-high-level output propagation time, from input S <sub>D</sub> . LOAD to outputs Q <sub>0</sub> ~ Q <sub>4</sub>				12	40	ns
t <sub>PLH</sub>	High-to-low-level output propagation time, from input S <sub>D</sub> . LOAD to outputs Q <sub>0</sub> ~ Q <sub>4</sub>				11	35	ns
t <sub>PHL</sub>	High-to-low-level output propagation time, from input R <sub>D</sub> to outputs Q <sub>0</sub> ~ Q <sub>4</sub>				11	35	ns

# MITSUBISHI LSTTLs

## M74LS96P

### 5-BIT SHIFT REGISTER

Note 5: Measurement circuit




- (1) The pulse generator (PG) has the following characteristics:  
 PRR = 1MHz,  $t_r = 6\text{ns}$ ,  $t_f = 6\text{ns}$ ,  $t_w = 500\text{ns}$ ,  
 $V_P = 3V_{PP}$ ,  $Z_0 = 50\Omega$ .
- (2)  $C_L$  includes probe and jig capacitance.

### TIMING REQUIREMENTS ( $V_{CC}=5V$ , $T_a = 25^\circ\text{C}$ , unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
$t_w(T)$	Clock input T pulse width		20	5		ns
$t_w(S_D)$	Parallel data input pulse width		30	5		ns
$t_w(\overline{RD})$	Direct reset pulse width		30	5		ns
$t_{SU}(D_S)$	Setup time $D_S$ to T		30	3		ns
$t_{H}(D_S)$	Hold time $D_S$ to T		5	-1		ns


### TIMING DIAGRAM (Reference level = 1.3V)

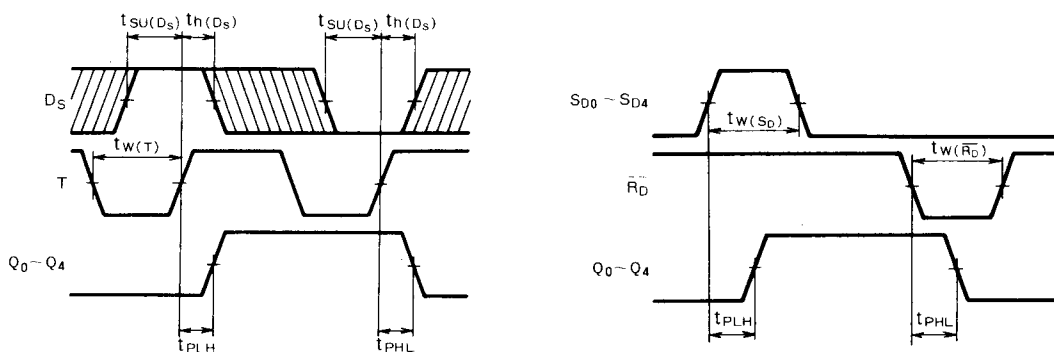

Note 6: The shaded areas indicate when the input is permitted to change for predictable output performance.


**TYPE 14P4 14-PIN MOLDED PLASTIC DIL**

Dimension in mm

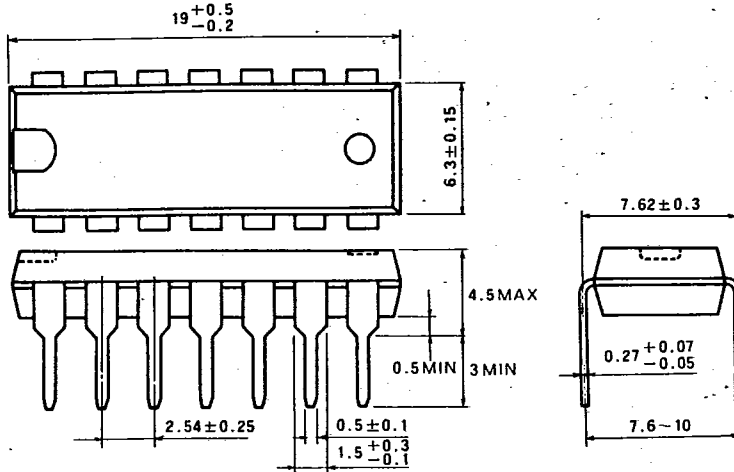

**TYPE 16P4 16-PIN MOLDED PLASTIC DIL**

Dimension in mm

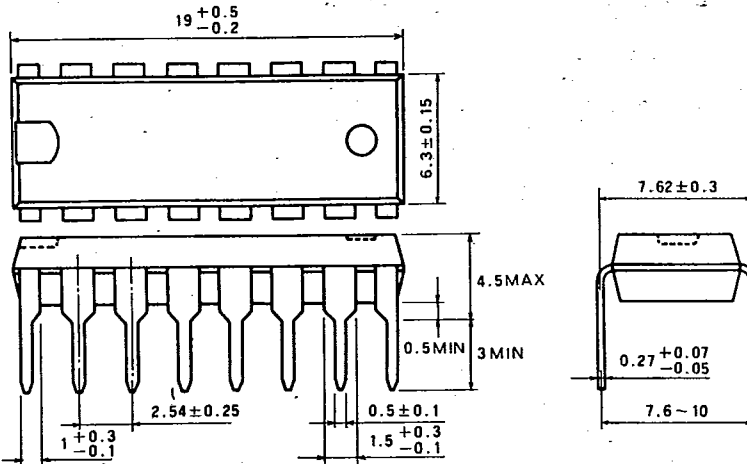

**TYPE 20P4 20-PIN MOLDED PLASTIC DIL**

Dimension in mm

