




## Product Features

- Near-zero propagation delay
- 5-ohm or 25-ohm switches connect inputs to outputs
- Fast Switching Speed: 4.5ns max.
- 32x384 function with flow-through pinout make board layout easier
- Permits Hot Insertion.
- V<sub>CC</sub> Operating Range: 3.0V to 3.6V
- Industrial operating temperature: -40°C to +85°C
- Packages available:
  - 48-pin 150-mil wide plastic BQSOP (B)
  - 48-pin 240-mil wide plastic TSSOP (A)
  - 48-pin 300-mil wide plastic SSOP (V)

## Logic Block Diagram

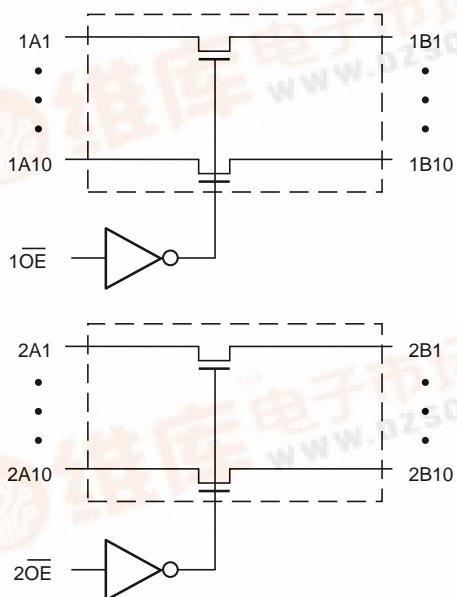

## Truth Table<sup>(1)</sup>

Inputs		Inputs/Outputs	
1OE	2OE	1A,1B	2A,2B
L	L	1A = 1B	2A = 2B
L	H	1A = 1B	Z
H	L	Z	2A = 2B
H	H	Z	Z

Note:

H = High Voltage Level  
L = Low Voltage Level  
Hi-Z = High Impedance

## PI3B16210 PI3B162210 (25 Ohms)

### 3.3V, Hot Insertion 20-Bit, 2-Port BusSwitch

#### Product Description

Pericom Semiconductor's PI3B series of BusSwitch circuits are produced using the Company's advanced submicron CMOS technology, achieving industry leading speed.

The PI3B16210 is configured as a 3.3 volt 20-bit, 2-port bus switch designed with a low ON resistance (5 ohms) allowing inputs to be connected directly to outputs. The bus switch creates no additional propagational delay or additional ground bounce noise. Switches are turned ON by the Bus Enable ( $x\overline{OE}$ ) input signal.

The PI3B162210 device has a built-in 25-ohm series resistor to reduce noise resulting from reflections, thus eliminating the need for an external terminating resistor.

#### Product Pin Configuration

NC	1	48	1 $\overline{OE}$
1A1	2	47	2 $\overline{OE}$
1A2	3	46	1B1
1A3	4	45	1B2
1A4	5	44	1B3
1A5	6	43	1B4
1A6	7	42	1B5
GND	8	41	GND
1A7	9	40	1B6
1A8	10	48-Pin	1B7
1A9	11	A, B, V	1B8
1A10	12	37	1B9
2A1	13	36	1B10
2A2	14	35	2B1
VCC	15	34	2B2
2A3	16	33	2B3
GND	17	32	GND
2A4	18	31	2B4
2A5	19	30	2B5
2A6	20	29	2B6
2A7	21	28	2B7
2A8	22	27	2B8
2A9	23	26	2B9
2A10	24	25	2B10

#### Product Pin Description

Pin Name	Description
1 $\overline{OE}$ , 2 $\overline{OE}$	Bus Enable Inputs (Active LOW)
1A1-1A10, 2A1-2A10	Bus A
1B1 - 1B10, 2B1 - 2B10	Bus B



PI3B16210/162210  
3.3V, Hot Insertion,  
20-Bit, 2-Port BusSwitch

## Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature .....	-65°C to +150°C
Ambient Temperature with Power Applied .....	-0°C to +85°C
Supply Voltage Range .....	-0.5V to +4.6V
DC Input Voltage .....	-0.5V to +4.6V
DC Output Current .....	120mA
Power Dissipation .....	0.5W

### Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

## DC Electrical Characteristics (Over the Operating Range, $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ , $V_{CC} = 3.0\text{V}$ to $3.6\text{V}$ )

Parameters	Description	Test Conditions <sup>(1)</sup>	Min.	Typ <sup>(2)</sup>	Max.	Units
$V_{IH}$	Input HIGH Voltage	Guaranteed Logic HIGH Level	2.0	—	—	V
$V_{IL}$	Input LOW Voltage	Guaranteed Logic LOW Level	-0.5	—	0.8	
$I_I$	Input Current	$V_{CC} = \text{Max}$ , $V_{IN} = V_{CC}$ or GND	—	—	$\pm 1$	$\mu\text{A}$
		$V_{CC} = 0\text{V}$ , $V_{IN} = V_{CC}$	—	—	$\pm 1$	
$I_{OZH}$	High Impedance Output Current	$0 \leq A, B \leq V_{CC}$	—	—	10	
$V_{IK}$	Clamp Diode Voltage	$V_{CC} = \text{Min.}$ , $I_{IN} = -18\text{mA}$	—	-0.7	-1.2	V
$R_{ON}$	Switch ON Resistance <sup>(3)</sup>	$V_{CC} = 3\text{V}$ , $V_{IN} = 0.0\text{V}$ (16210)	—	5	8	$\Omega$
		$I_{ON} = 24\text{mA}$ , $64\text{mA}$ (162210)	20	28	40	
		$V_{CC} = 3\text{V}$ , $V_{IN} = 2.4\text{V}$ , (16210)	—	10	15	
		$I_{ON} = 15\text{mA}$ (162210)	20	35	48	

## Capacitance ( $T_A = 25^\circ\text{C}$ , $f = 1\text{ MHz}$ )

Parameters <sup>(4)</sup>	Description	Test Conditions	Typ	Units
$C_{IN}$	Input Capacitance	$V_{IN} = 0\text{V}$	3	pF
$C_{OFF}$	A/B Capacitance, Switch Off		8.5	
$C_{ON}$	A/B Capacitance, Switch On		17.0	

### Notes:

- For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.
- Typical values are at  $V_{CC} = 3.3\text{V}$ ,  $T_A = 25^\circ\text{C}$  ambient and maximum loading.
- Measured by the voltage drop between A and B pin at indicated current through the switch. ON resistance is determined by the lower of the voltages on the two (A,B) pins.
- This parameter is determined by device characterization but is not production tested.



**PI3B16210/162210  
3.3V, Hot Insertion,  
20-Bit, 2-Port BusSwitch**

## Power Supply Characteristics

Parameters	Description	Test Conditions <sup>(1)</sup>		Min.	Typ <sup>(2)</sup>	Max.	Units
I <sub>CC</sub>	Quiescent Power Supply Current	V <sub>CC</sub> = Max.	V <sub>IN</sub> = GND or V <sub>CC</sub>			10	μA
ΔI <sub>CC</sub>	Supply Current per Input @ TTL HIGH	V <sub>CC</sub> = Max.	V <sub>IN</sub> = 3.0V <sup>(3)</sup>			750	
I <sub>CCD</sub>	Supply Current per Input per MHz <sup>(4)</sup>	V <sub>CC</sub> = Max. A & B Pins Open BE = GND Control Input Toggling 50% Duty Cycle				0.25	mA/MHz

### Notes:

1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device.
2. Typical values are at V<sub>CC</sub>=3.3V, +25°C ambient.
3. Per TTL driven input (control inputs only); A and B pins do not contribute to I<sub>CC</sub>.
4. This current applies to the control inputs only and represent the current required to switch internal capacitance at the specified frequency. The A and B inputs generate no significant AC or DC currents as they transition. This parameter is not tested, but is guaranteed by design.

## Switching Characteristics over Operating Range

Parameters	Description	Conditions <sup>(1)</sup>		Com.		Units
				Min.	Max.	
t <sub>PLH</sub> t <sub>PHL</sub>	Bus Enable Time BE to Ax or Bx	C <sub>L</sub> = 50pF R <sub>L</sub> = 500 ohms	16210 162210		0.25 1.25	ns
t <sub>PZH</sub> t <sub>PZL</sub>	Bus Enable Time BE to Ax or Bx	C <sub>L</sub> = 50pF R <sub>L</sub> = 500 ohms R = 500 ohms		1	4.5	
t <sub>PHZ</sub> t <sub>PLZ</sub>	Bus Disable Time BE to Ax or Bx			1	.5.0	

### Notes:

1. See test circuit and wave forms.
2. This parameter is guaranteed but not tested on Propagation Delays.
3. The bus switch contributes no propagational delay other than the RC delay of the ON resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.25ns for 50pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagational delay to the system. Propagational delay of the bus switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.


## Ordering Information

Part	Pin - Package	Temperature
PI3B16209V	48 - TSSOP (V)	-40°C to +85°C
PI3B162209V		
PI3B16209A	48 - SSOP (A)	
PI3B162209A		




PI3B16210/162210  
3.3V, Hot Insertion,  
20-Bit, 2-Port BusSwitch

#### 48-Pin TSSOP (A) Package

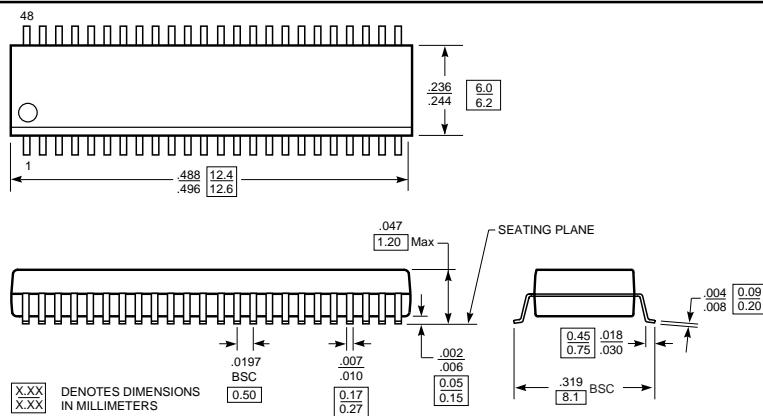

#### 48-Pin SSOP (V) Package

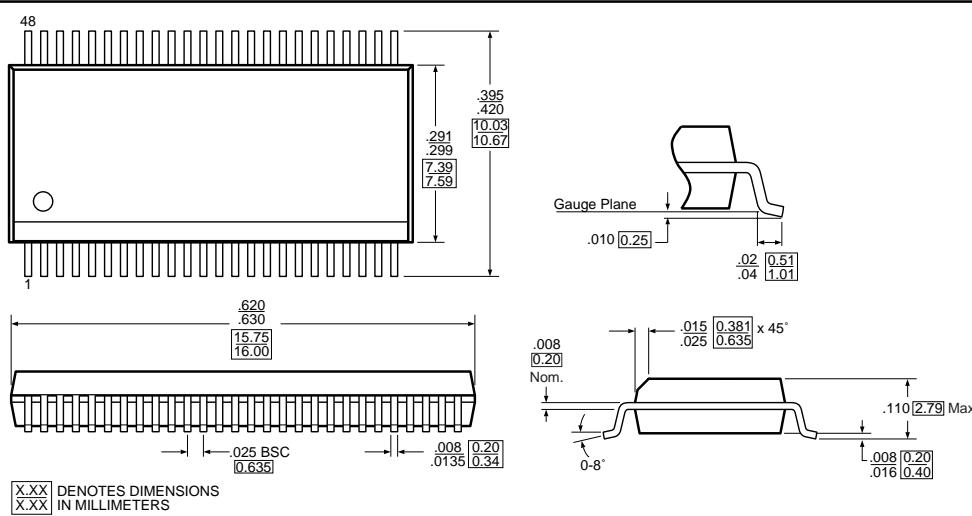

#### 48-Pin BQSOP (B) Package

