



PI3A4628

## 3.0V, SOT<sub>TINY</sub><sup>TM</sup> Single-Supply 0.4Ω SPST (NO) CMOS Analog Switch

## Features

- Low On-Resistance:  $0.4\Omega$  Max (+2.7V Supply)
- $0.1\Omega$  Max. On-Resistance Flatness at  $+25^\circ\text{C}$
- Fast Switching: 10ns Max.
- +1.5 V to +3.6V Single-Supply Operation
- TTL/CMOS-Logic Compatible
- $-25\text{dB}$  Off-Isolation at 100KHz
- 1nA Max. Off-Leakage at  $+25^\circ\text{C}$
- Packaging (available Pb-free):
  - 6-pin Small Compact SOT-23
  - 6-contact Ultra Compact Thin Dual in-line Flat No Lead TDFN

## Applications

- Cellular Phones • Communications Circuits
- Battery-Operated Equipment • DSL Modems
- Audio and Video Signal Routing • PCMCIA Cards

## Pin Description

Pin Number	Name	Description
1	COM	Analog Switch, Common
2	NO	Analog Switch, Normally Open
3	GND	Ground
4	$\overline{IN}$	Digital Control Input
5	IN	Digital Control Input
6	V <sub>CC</sub>	Positive Supply Voltage

### Note:

NO and COM pins are identical and interchangeable. Any pin may be considered as an input or an output; signals pass.


## Description

PI3A4628 is a single-pole/single-throw (SPST) normally open (NO) analog switch that operates from a single +1.5V to +3.6V supply. The device has two control inputs.

The switch has  $0.4\Omega$  Max On-Resistance ( $R_{ON}$ ), with  $0.1\Omega$  Max  $R_{ON}$  flatness over the analog signal range when powered from a  $+3.0\text{V}$  supply. Leakage currents are less than  $2\text{nA}$  and fast switching times are less than  $10\text{ns}$ .

To minimize PC board area use, the device is available in the ultra compact TDFN and the small compact SOT-23 packages.

## Functional Block Diagrams/Pin Configurations



Switches shown for Logic “0” input

## Truth Table

$\overline{IN}$	IN	Switch State
1	0	OFF
1	1	OFF
0	0	ON
0	1	ON

## Absolute Maximum Ratings

Voltages Referenced to GND

$V_{CC}$  ..... -0.5V to +3.6V

$V_{IN}$ ,  $V_{COM}$ ,  $V_{NC}$ ,  $V_{NO}$  (Note 1) ..... -0.5V to  $V_{CC}$  +0.3V or 30mA, whichever occurs first

Current (any terminal) ..... ±200mA

Peak Current, COM, NO, NC

(Pulsed at 1ms, 10% duty cycle) ..... ±400mA

## Thermal Information

Continuous Power Dissipation

SOT-23 (derate 7.1mW/°C above +70°C) ..... 0.5W

Storage Temperature ..... -65°C to +150°C

Lead Temperature (soldering, 10s) ..... +300°C

**Note 1:** Signals on NC, NO, COM, or IN exceeding  $V_{CC}$  or GND are clamped by internal diodes. Limit forward diode current to 30mA.

**Caution:** Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied.

## Electrical Specifications - Single +3.3V Supply

( $V_{CC}$  = +3.3V ± 10%, GND = 0V,  $V_{IH}$  = 1.4V,  $V_{IL}$  = 0.5V)

Parameter	Symbol	Conditions	Temp. (°C)	Min. <sup>(1)</sup>	Typ. <sup>(2)</sup>	Max. <sup>(1)</sup>	Units	
<b>Analog Switch</b>								
Analog Signal Range <sup>(3)</sup>	$V_{ANALOG}$		Full	0		$V_{CC}$	V	
On Resistance	$R_{ON}$	$V_{CC} = 2.7V$ , $I_{COM} = 100mA$ , $V_{NO}$ or $V_{NC} = +1.5V$	25			0.4	$\Omega$	
			Full			0.4		
	$\Delta R_{ON}$		25			0.05		
			Full			0.06		
On-Resistance Flatness <sup>(5)</sup>	$R_{FLAT(ON)}$	$V_{CC} = 2.7V$ , $I_{COM} = 100mA$ , $V_{NO}$ or $V_{NC} = 0.8V$ , 2.0V	25			0.1		
			Full			0.1		
NO or NC Off Leakage Current <sup>(6)</sup>	$I_{NO(OFF)}$ or $I_{NC(OFF)}$	$V_{CC} = 3.3V$ , $V_{COM} = 0V$ $V_{NO}$ or $V_{NC} = +2.0V$	25	-1		1	nA	
			Full	-20		10		
COM On Leakage Current <sup>(6)</sup>	$I_{COM(ON)}$	$V_{CC} = 3.3V$ , $V_{COM} = +2.0V$ $V_{NO}$ or $V_{NC} = +2.0V$	25	-2		2		
			Full	-20		20		



PI3A4628  
3.0V, SOTINY™ Single-Supply  
0.4Ω SPST (NO) CMOS Analog Switch

**Electrical Specifications - Single +3.3V Supply (continued) (V<sub>CC</sub> = +3.3V ±10%, GND = 0V, V<sub>IH</sub> = 1.4V, V<sub>IL</sub> = 0.5V)**

Parameter	Symbol	Conditions	Temp. (°C)	Min. <sup>(1)</sup>	Typ. <sup>(2)</sup>	Max. <sup>(1)</sup>	Units
<b>Logic Input</b>							
Input High Voltage	V <sub>IH</sub>	Guaranteed Logic High Level	Full	1.4			V
Input Low Voltage	V <sub>IL</sub>	Guaranteed Logic LowLevel				0.5	
Input Current with Voltage High	I <sub>INH</sub>	V <sub>IN</sub> = 1.4V, all others = 0.5V		-1		1	μA
Input Current with Voltage Low	I <sub>INL</sub>	V <sub>IN</sub> = 0.5V, all others = 1.4V		-1		1	
<b>Dynamic</b>							
Turn-On-Time	t <sub>ON</sub>	V <sub>CC</sub> = 3.3V, V <sub>NO</sub> or V <sub>NC</sub> = 2.0V, Figure 1	25			10	ns
Turn-Off-Time	t <sub>OFF</sub>		Full			10	
Charge Injection <sup>(3)</sup>	Q		25		50		
Off Isolation <sup>(7)</sup>	O <sub>IRR</sub>				-25		
NC or NO Capacitance	C <sub>NC/NO (OFF)</sub>	f = 1MHz, Figure 5			130		pF
COM Off Capacitance	C <sub>COM(OFF)</sub>				130		
COM On Capacitance	C <sub>COM(ON)</sub>	f = 1MHz, Figure 6			270		
<b>Supply</b>							
Power-Supply Range	V <sub>CC</sub>		Full	1.5		3.6	V
Positive Supply Current	I <sub>CC</sub>	V <sub>CC</sub> = 3.6V, V <sub>IN</sub> = 0V or V <sub>CC</sub>				100	nA

**Notes:**

1. The algebraic convention, where most negative value is a minimum and most positive is a maximum, is used in this data sheet.
2. Typical values are for DESIGN AID ONLY, not guaranteed or subject to production testing.
3. Guaranteed by design.
4.  $\Delta R_{ON} = R_{ON} \text{ Max.} - R_{ON} \text{ Min.}$
5. Flatness is defined as the difference between the maximum and minimum value of On-Resistance measured.
6. Leakage parameters are 100% tested at maximum rated hot temperature and guaranteed by correlation at +25°C.
7. Off Isolation =  $20\log_{10} [ V_{COM} / (V_{NO} \text{ or } V_{NC}) ]$ . See Figure 3.



PI3A4628  
3.0V, SOTINY™ Single-Supply  
0.4Ω SPST (NO) CMOS Analog Switch

**Electrical Specifications - Single +2.5V Supply** ( $V_{CC} = +2.5V \pm 10\%$ ,  $GND = 0V$ ,  $V_{IH} = 1.4V$ ,  $V_{IL} = 0.5V$ )

Parameter	Symbol	Conditions	Temp. (°C)	Min. <sup>(1)</sup>	Typ. <sup>(2)</sup>	Max. <sup>(1)</sup>	Units	
<b>Analog Switch</b>								
Analog Signal Range <sup>(3)</sup>	$V_{ANALOG}$			0		$V_{CC}$	V	
On-Resistance	$R_{ON}$	$V_{CC} = 2.5V$ , $I_{COM} = -8mA$ , $V_{NO}$ or $V_{NC} = 1.8V$	25			0.4	Ω	
			Full			0.4		
On-Resistance Match Between Channels <sup>(4)</sup>	$\Delta R_{ON}$	$V_{CC} = 2.5V$ , $I_{COM} = -8mA$ , $V_{NO}$ or $V_{NC} = 0.8V$ , $1.8V$	25			0.05	Ω	
			Full			0.06		
On-Resistance Flatness <sup>(5)</sup>	$R_{FLAT(ON)}$		25			0.1		
			Full			0.1		
<b>Dynamic</b>								
Turn-On-Time	$t_{ON}$	$V_{CC} = 2.5V$ , $V_{NO}$ or $V_{NC} = 1.8V$ , Figure 1	25			10	ns	
			Full			15		
Turn-Off-Time	$t_{OFF}$		25			10		
			Full			10		
Charge Injection <sup>(3)</sup>	Q	$C_L = 1nF$ , $V_{GEN} = 0V$ , $R_{GEN} = 0V$ , Figure 2	25		42		pC	
<b>Logic Input</b>								
Input High Voltage	$V_{IH}$	Guaranteed Logic High Level	Full	1.4			V	
Input Low Voltage	$V_{IL}$	Guaranteed Logic LowLevel	Full			0.5		
Input High Current	$I_{IH}$	$V_{IN} = 1.4V$ , all others = $0.5V$	Full	-1		1	μA	
Input Low Current	$I_{IL}$	$V_{IN} = 0.5V$ , all others = $1.4V$	Full	-1		1		

**Notes:**

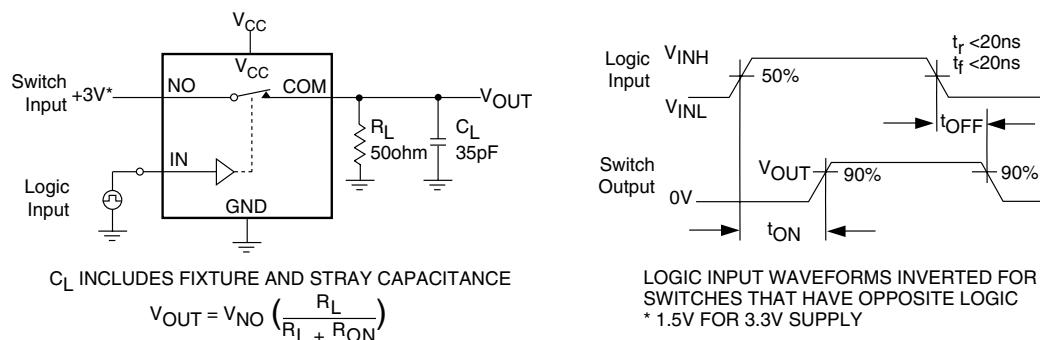
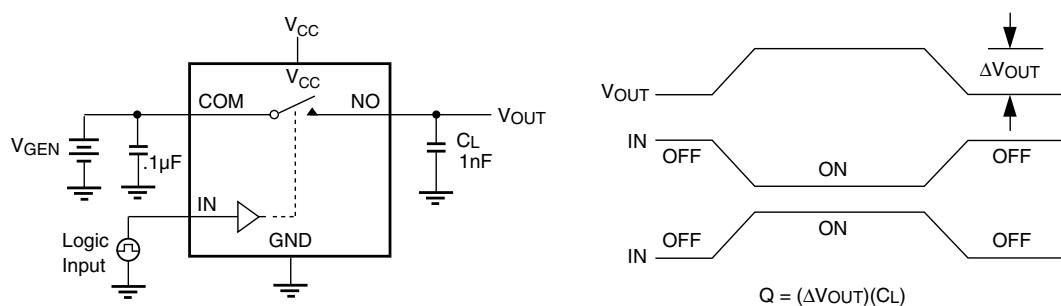
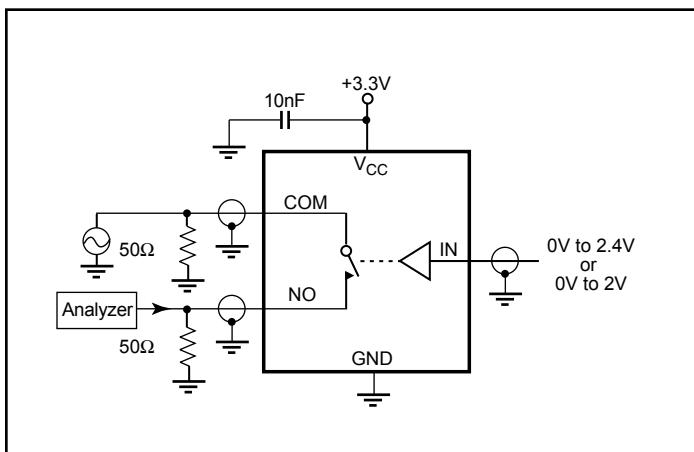
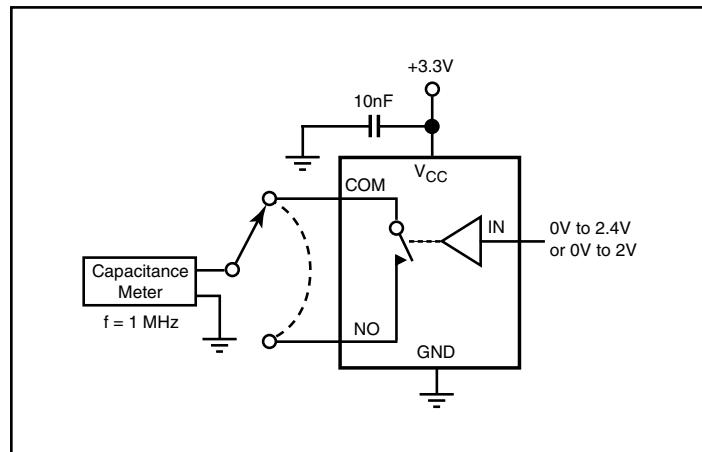
1. The algebraic convention, where most negative value is a minimum and most positive is a maximum, is used in this data sheet.
2. Typical values are for DESIGN AID ONLY, not guaranteed or subject to production testing.
3. Guaranteed by design.
4.  $\Delta R_{ON} = R_{ON} \text{ max.} - R_{ON} \text{ min.}$
5. Flatness is defined as the difference between the maximum and minimum value of On-resistance measured.

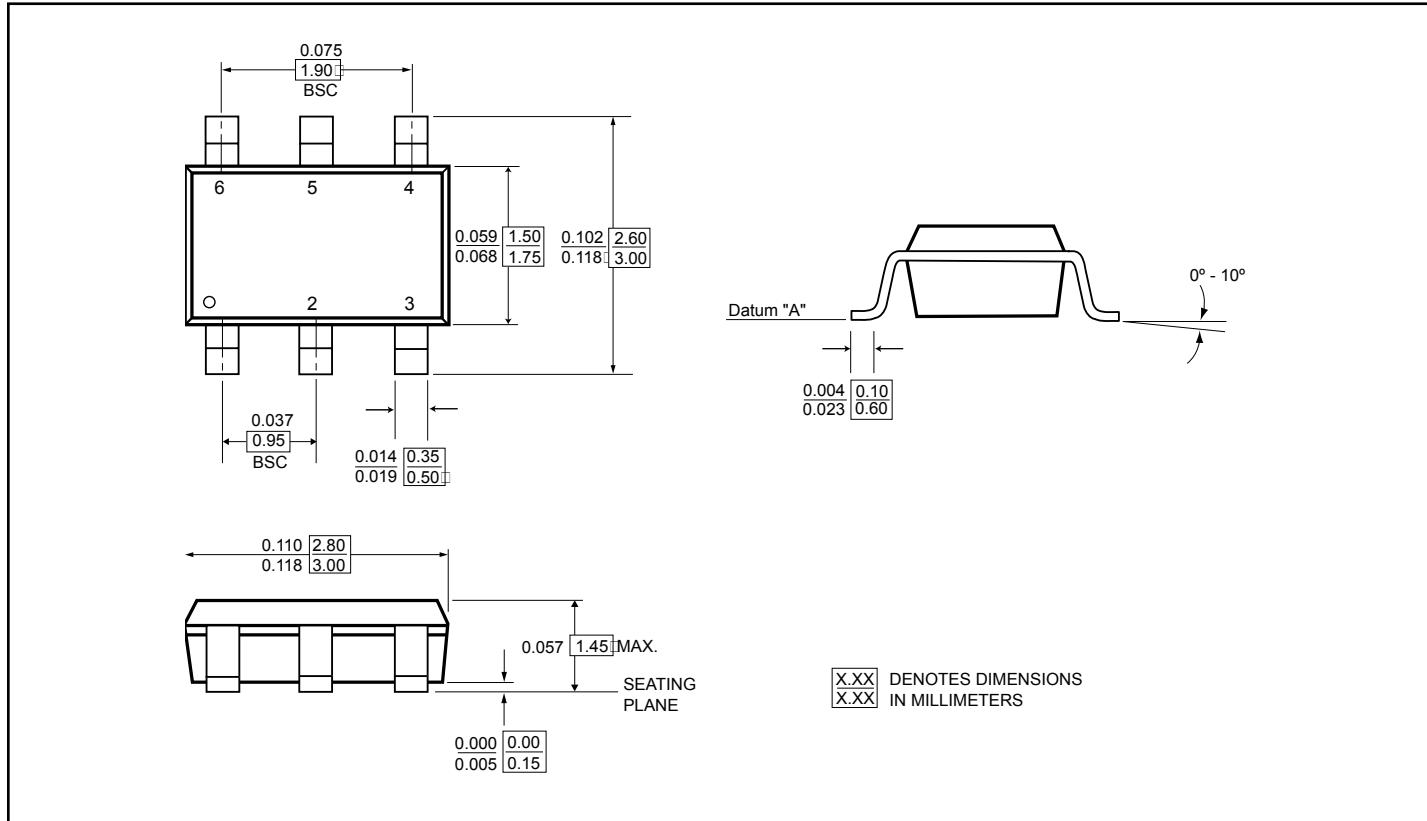
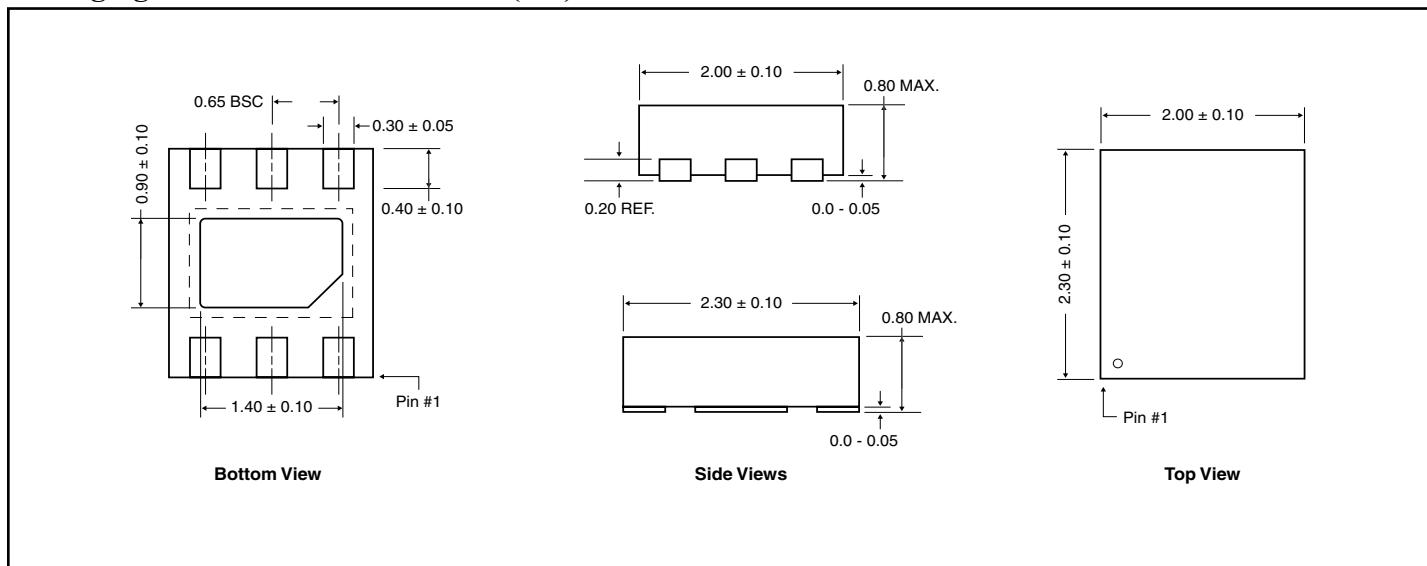
Electrical Specifications - Single +1.8V Supply ( $V_{CC} = +1.8V \pm 10\%$ , GND = 0V,  $V_{IH} = 1.4V$ ,  $V_{IL} = 0.5V$ )

Parameter	Symbol	Conditions	Temp. (°C)	Min. <sup>(1)</sup>	Typ. <sup>(2)</sup>	Max. <sup>(1)</sup>	Units
<b>Analog Switch</b>							
Analog Signal Range <sup>(3)</sup>	$V_{ANALOG}$			0		$V_{CC}$	V
On-Resistance	$R_{ON}$	$V_{CC} = 1.8V$ , $I_{COM} = -4mA$ , $V_{NO}$ or $V_{NC} = 1.5V$	25			0.4	Ω
			Full			0.8	
On-Resistance Match Between Channels <sup>(4)</sup>	$\Delta R_{ON}$	$V_{CC} = 1.8V$ , $I_{COM} = -4mA$ , $V_{NO}$ or $V_{NC} = 0.8V$ , 1.5V	25			0.05	Ω
			Full			0.06	
On-Resistance Flatness <sup>(5)</sup>	$R_{FLAT(ON)}$		25			0.4	
			Full			0.6	
<b>Dynamic</b>							
Turn-On-Time	$t_{ON}$	$V_{CC} = 1.8V$ , $V_{NO}$ or $V_{NC} = 1.5V$ , Figure 1	25			15	ns
			Full			15	
Turn-Off-Time	$t_{OFF}$		25			10	
			Full			15	
Charge Injection <sup>(3)</sup>	Q	$C_L - 1nF$ , $V_{GEN} = 0V$ , $R_{GEN} = 0Ω$ , Figure 2	25		29		pC
<b>Logic Input</b>							
Input High Voltage	$V_{IH}$	Guaranteed Logic High Level	Full	1.4			V
Input Low Voltage	$V_{IL}$	Guaranteed Logic LowLevel	Full			0.5	
Input High Current	$I_{IH}$	$V_{IN} = 1.4V$ , all others = 0.5V	Full	-1		1	μA
Input Low Current	$I_{IL}$	$V_{IN} = 0.5V$ , all others = 1.4V	Full	-1		1	

## Notes:

1. The algebraic convention, where most negative value is a minimum and most positive is a maximum, is used in this data sheet.
2. Typical values are for DESIGN AID ONLY, not guaranteed or subject to production testing.
3. Guaranteed by design.
4.  $\Delta R_{ON} = R_{ON} \text{ max.} - R_{ON} \text{ min.}$
5. Flatness is defined as the difference between the maximum and minimum value of On-resistance measured.

**Test Circuits/Timing Diagrams**

**Figure 1. Switching Time**

**Figure 2. Charge Injection**

**Figure 3. Off Isolation**

**Figure 4. Channel On/Off Capacitance**

**Packaging Mechanical: 6-Pin SOT-23 (T)**

**Packaging Mechanical: 6-Pin TDFN (ZC)**




PI3A4628

3.0V, SOTINY™ Single-Supply  
0.4Ω SPST (NO) CMOS Analog Switch

## Ordering Information

Ordering Code	Package Code	Package Description	Package Top Mark
PI3A4628TX	T	6-pin Small Compact, SOT-23	ZB
PI3A4628TEX	T	Pb-free and Green, 6-pin Small Compact, SOT-23	ZB
PI3A4628ZCEX	ZC	Pb-free and Green, 6-contact Small Compact, TDFN	ZB

**Notes:**

1. Thermal characteristics can be found on the company web site at <http://www.pericom.com/packaging/>
2. X = Tape/Reel