
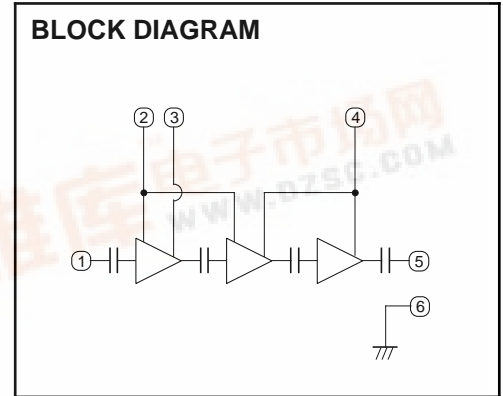


MITSUBISHI RF POWER MODULE

M67760LC

806-870MHz, 12.5V, 20W, FM MOBILE RADIO

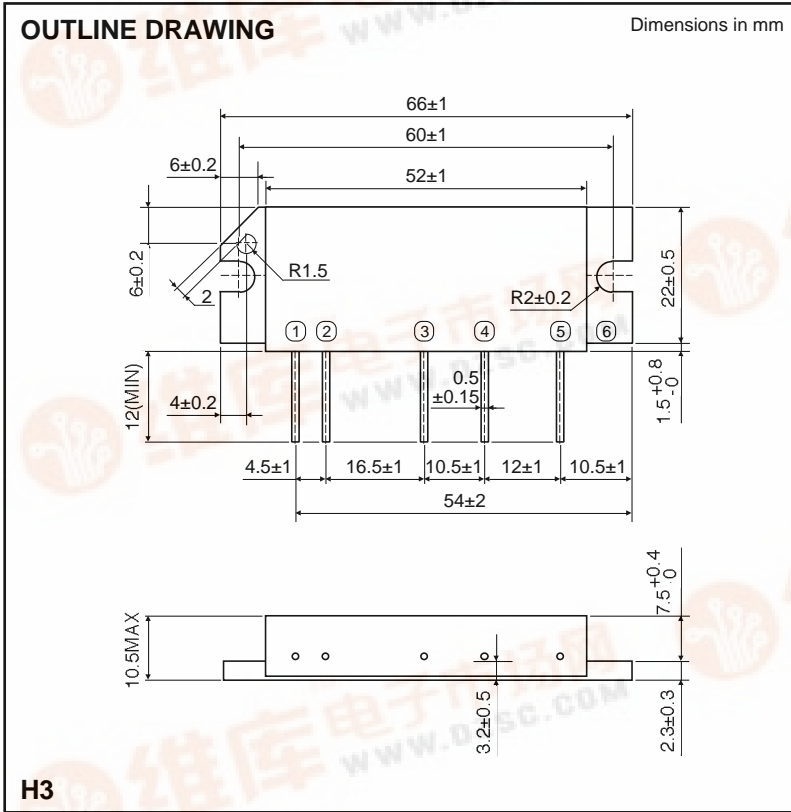

PIN:

- ①Pin : RF INPUT
- ②VBB : BASE BIAS SUPPLY
- ③VCC1: 1st. DC SUPPLY
- ④VCC2: 2nd. DC SUPPLY
- ⑤Po : RF OUTPUT
- ⑥GND: FIN

ABSOLUTE MAXIMUM RATINGS (Tc=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
VBB	Base bias		9.5	V
VCC1	Supply voltage	VBB=9V	14	V
VCC2	Supply voltage	ZG=ZL=50 , VBB=9V	16.5	V
ICc	Total current	ZG=ZL=50 , VCC1 12.5V	8.5	A
P _{in} (max)	Input power	f=806-870MHz, ZG=ZL=50	0.8	W
P _O (max)	Output power	ZG=ZL=50	25	W
T _C (OP)	Operation case temperature	ZG=ZL=50	-30 to +110	°C
T _{stg}	Storage temperature		-40 to +110	°C

Note. Above parameters are guaranteed independently.

ELECTRICAL CHARACTERISTICS (Tc=25°C unless otherwise noted)

Symbol	Parameter	Test conditions	Limits		Unit
			Min	Max	
f	Frequency range		806	870	MHz
P _O	Output power	VBB=9V, VCC1=VCC2=12.5V, P _{in} =0.4W, ZG=ZL=50	20		W
η	Total efficiency	VBB=9V, VCC1=VCC2=12.5V, ZG=ZL=50 , P _O =20W (P _{in} :controlled)	25		%
2f _o	2nd. harmonic			-30	dBc
in	Input VSWR			3	-
-	Load VSWR tolerance	VBB=9V, VCC1=12.5V, VCC2=15.5V, P _O =20W (P _{in} :controlled), ZG=50 , Load VSWR=20:1 (All phase)	No degradation or destroy		-
-	Stability	VBB=9V, f=806-825, 851-870MHz, VCC1=10 to 12.5V, VCC2=10 to 15.5V (VCC1 VCC2), P _O =0 to 20W (P _{in} :controlled less than 0.4W), ZG=50 , Load VSWR 3:1 (All phase)	No oscillation more than -60dBc		-

Note: Above parameters, ratings, limits and test conditions are subject to change.




MITSUBISHI RF POWER MODULE
M67760LC


806-870MHz, 12.5V, 20W, FM MOBILE RADIO

TYPICAL PERFORMANCE DATA


OUTPUT POWER, EACH CURRENT VS. FREQUENCY

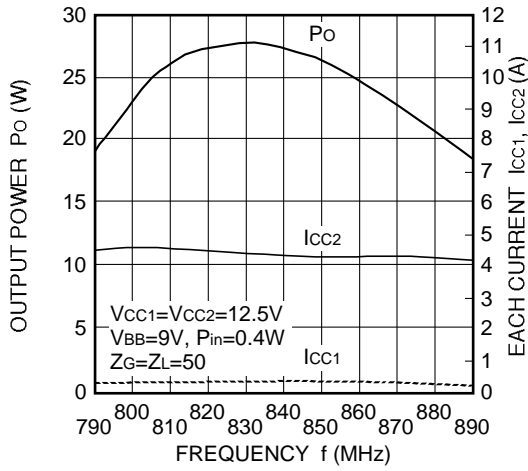


OUTPUT POWER, EACH CURRENT VS. INPUT POWER

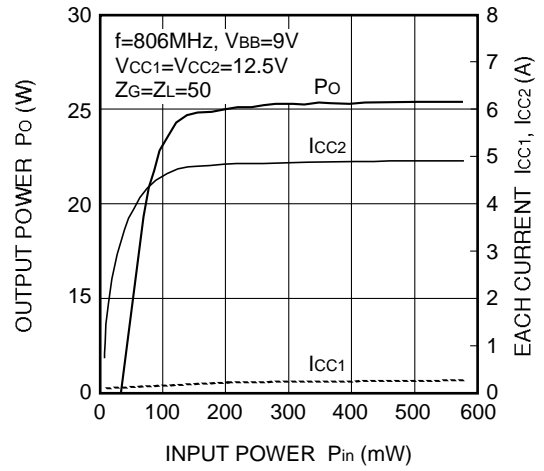


OUTPUT POWER, EACH CURRENT VS. INPUT POWER

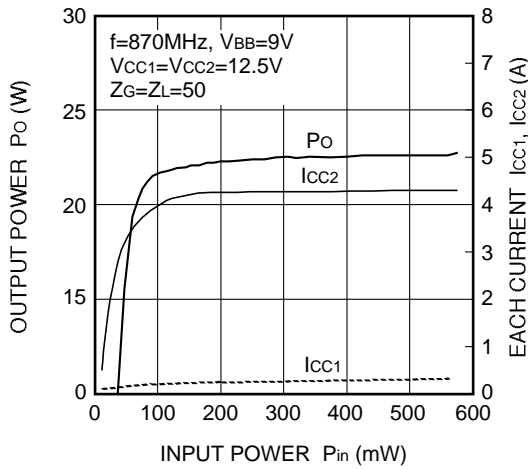

OUTPUT POWER, EACH CURRENT VS. SUPPLY VOLTAGE


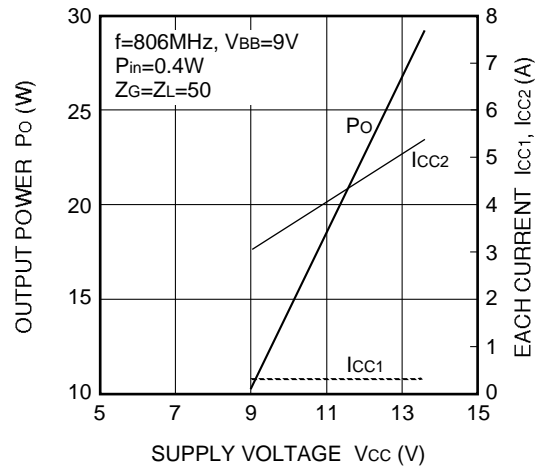


OUTPUT POWER, EACH CURRENT VS. SUPPLY VOLTAGE

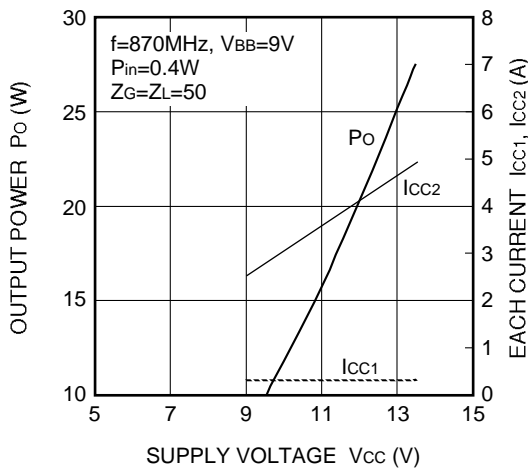

MITSUBISHI RF POWER MODULE M67760HC

896-941MHz, 12.5V, 20W, FM MOBILE RADIO

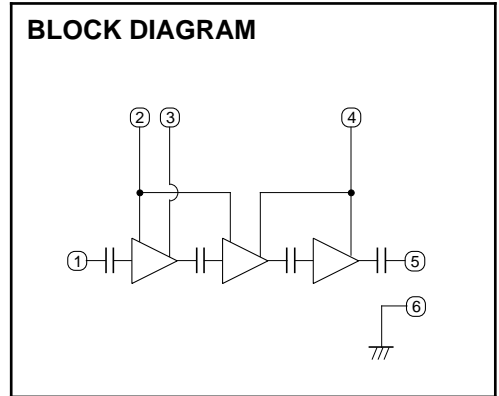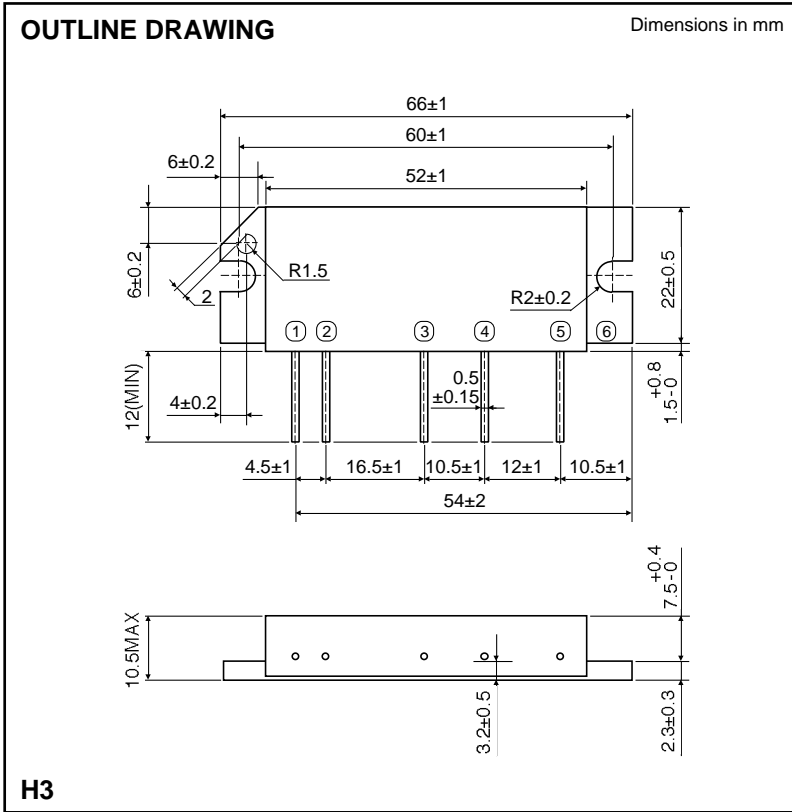

- PIN:
- ① Pin : RF INPUT
 - ② V_{BB} : BASE BIAS SUPPLY
 - ③ V_{CC1}: 1st. DC SUPPLY
 - ④ V_{CC2}: 2nd. DC SUPPLY
 - ⑤ P_o : RF OUTPUT
 - ⑥ GND: FIN

ABSOLUTE MAXIMUM RATINGS (T_c=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
V _{BB}	Base bias		9.5	V
V _{CC1}	Supply voltage	V _{BB} =9V	14	V
V _{CC2}	Supply voltage	Z _G =Z _L =50 , V _{BB} =9V	16.5	V
I _{CC}	Total current	Z _G =Z _L =50 , V _{CC1} 12.5V	8.5	A
P _{in} (max)	Input power	f=896-941MHz, Z _G =Z _L =50	0.8	W
P _O (max)	Output power	Z _G =Z _L =50	25	W
T _c (OP)	Operation case temperature	Z _G =Z _L =50	-30 to +110	°C
T _{stg}	Storage temperature		-40 to +110	°C

Note. Above parameters are guaranteed independently.

ELECTRICAL CHARACTERISTICS (T_c=25°C unless otherwise noted)

Symbol	Parameter	Test conditions	Limits		Unit
			Min	Max	
f	Frequency range		896	941	MHz
P _o	Output power	V _{BB} =9V, V _{CC1} =V _{CC2} =12.5V, P _{in} =0.4W, Z _G =Z _L =50	20		W
η	Total efficiency	V _{BB} =9V, V _{CC1} =V _{CC2} =12.5V, Z _G =Z _L =50	25		%
2f _o	2nd. harmonic	P _O =20W (P _{in} :controlled)		-30	dBc
in	Input VSWR	V _{BB} =9V, V _{CC1} =12.5V, V _{CC2} =15.5V, P _O =20W (P _{in} :controlled), Z _G =50 , Load VSWR=20:1		3	-
-	Load VSWR tolerance	V _{BB} =9V, V _{CC1} =12.5V, V _{CC2} =15.5V, P _O =20W (P _{in} :controlled), Z _G =50 , Load VSWR=20:1	No degradation or destroy		-
-	Stability	V _{BB} =9V, f=896-902, 935-941MHz, V _{CC1} =10 to 12.5V, V _{CC2} =10 to 15.5V (V _{CC1} V _{CC2}), P _O =0 to 20W (P _{in} :controlled less than 0.4W), Z _G =50 , Load VSWR 3:1 (All phase)	No oscillation more than -60dBc		-


Note. Above parameters, ratings, limits and test conditions are subject to change.

MITSUBISHI RF POWER MODULE
M67760HC


896-941MHz, 12.5V, 20W, FM MOBILE RADIO

TYPICAL PERFORMANCE DATA


OUTPUT POWER, TOTAL EFFICIENCY VS. FREQUENCY

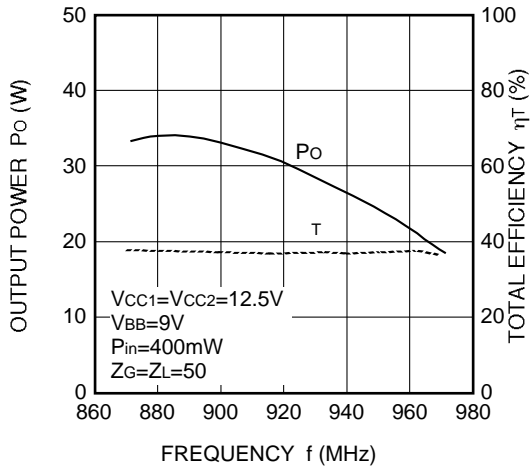


OUTPUT POWER, VS. INPUT POWER

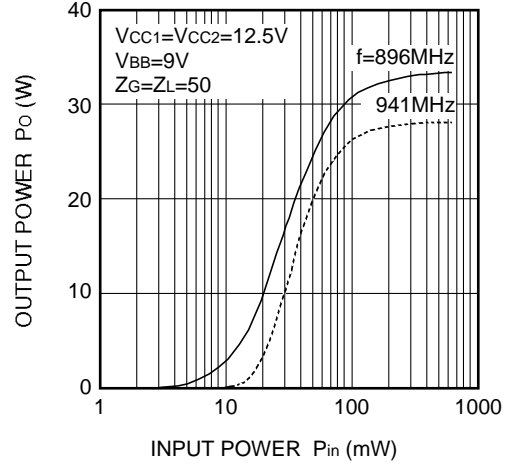


OUTPUT POWER, EACH CURRENT VS. 1st. SUPPLY VOLTAGE

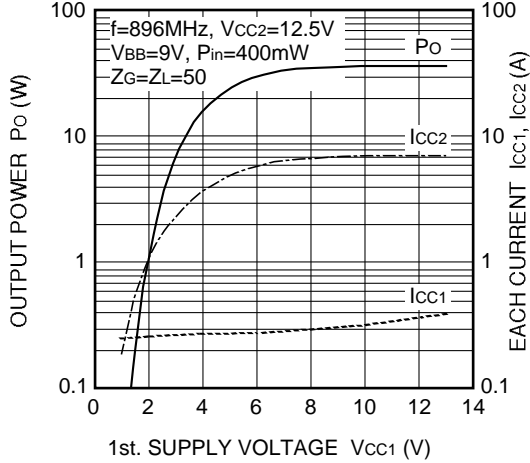

OUTPUT POWER, EACH CURRENT VS. 1st. SUPPLY VOLTAGE

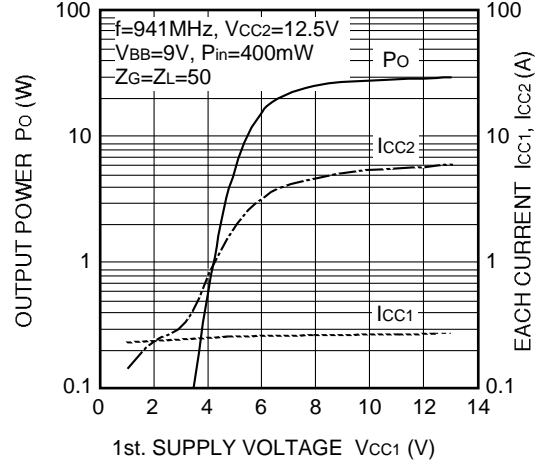

OUTPUT POWER, EACH CURRENT VS. SUPPLY VOLTAGE

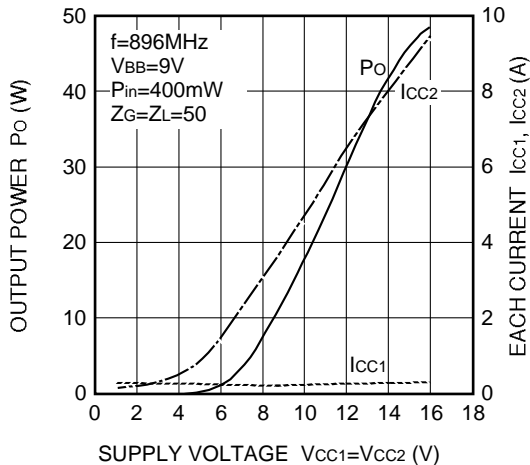

OUTPUT POWER, EACH CURRENT VS. SUPPLY VOLTAGE

