

## ASSP For Video Applications

CMOS

# 8-bit 100 MSPS A/D Converter

## MB40C328

### ■ DESCRIPTION


MB40C328 is a high-speed A/D converter using a fast CMOS technology.

### ■ FEATURES

- Resolution : 8 bit
- Linearity error :  $\pm 0.40\%$  (standard)
- Maximum conversion rate : 100 MSPS (minimum)
- Power supply voltage : 3.3 V single (standard)
- Digital input/output voltage range : CMOS level compatible
- Analog input voltage range : 0 to 3.0 V (2 Vp-p)
- Analog input capacitance : 22 pF (standard)
- Power dissipation : 210 mW (standard)
- Additional features : Reference voltage generator circuit:  $V_{REFT} = 3.0$  V,  $V_{REFB} = 1.0$  V  
High impedance output, power down function  
1:2 demultiplex output enable (RESET action enable)  
1/2 deviding clock output  
Cross sampling at 50 MHz (two-phase CLK) enable (CLKA, CLKB)
- Package : LQFP48 (7 mm × 7 mm, lead pitch 0.5 mm)

### ■ PACKAGE


48-pin plastic LQFP

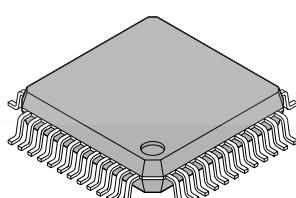

(FPT-48P-M05)

# MB40C328

## ■ PIN ASSIGNMENT

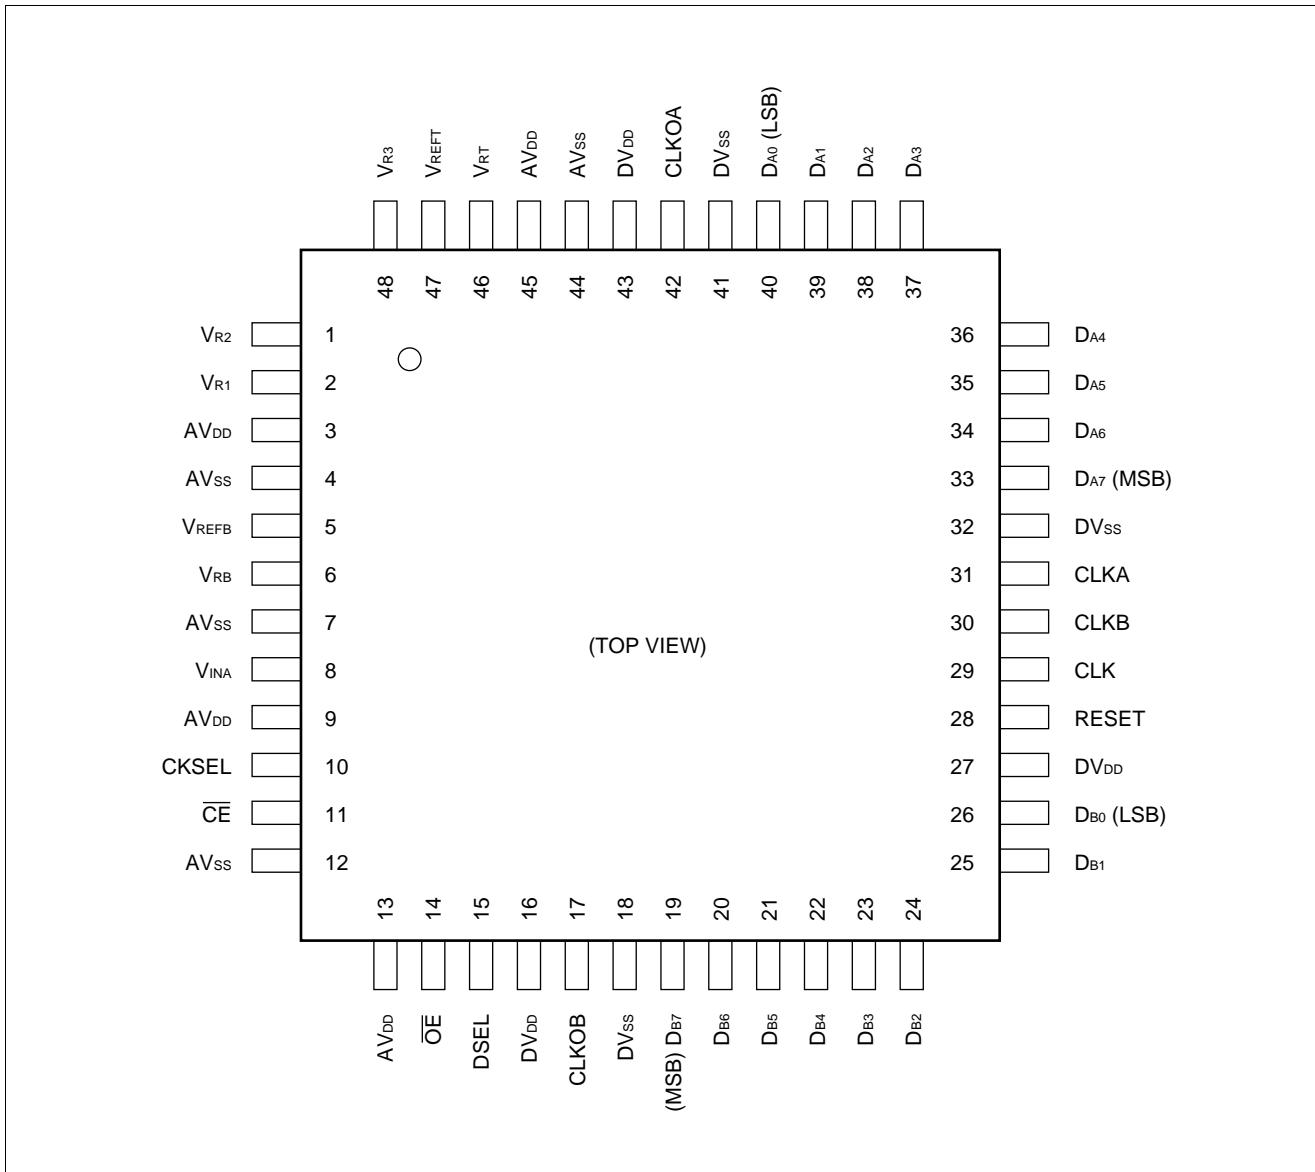

## ■ PIN DESCRIPTION

| Pin No.      | Symbol  | Description   |
|--------------|---|---|
| 3, 9, 13, 45 | AV <sub>DD</sub>                                      | Analog power supply (+3.3 V)  |
| 16, 27, 43   | DV <sub>DD</sub>                                      | Digital power supply (+3.3 V)   |
| 4, 7, 12, 44 | AV <sub>SS</sub>                                      | Analog power supply ground pin (0 V)  |
| 18, 32, 41   | DV <sub>SS</sub>                                      | Digital power supply ground pin (0 V)   |
| 33 to 40     | D <sub>A7</sub> to D <sub>A0</sub>                    | Digital output pin (Port A) D <sub>A7</sub> : MSB, D <sub>A0</sub> : LSB  |
| 19 to 26     | D <sub>B7</sub> to D <sub>B0</sub>                    | Digital output pin (Port B) D <sub>B7</sub> : MSB, D <sub>B0</sub> : LSB  |
| 11           | CĒ   | Power down at CĒ input "H" (internal pull-up resistor)   |
| 14           | OĒ   | Digital output (Both Port A, B) and clock output (CLKOA, CLKOB) are high impedance at OĒ input "H".  |
| 10           | CKSEL   | Mode of operation setting input pin (Refer to ■ MODE SETTING)   |
| 15           | DSEL  |   |
| 28           | RESET   | Dividing circuit reset input pin (See ■ TIMING CHART 2, 3)  |
| 29           | CLK   | Clock input pin (max 100 MHz)   |
| 31           | CLKA  | A ch clock input pin (max 50 MHz)   |
| 30           | CLKB  | B ch clock input pin (max 50 MHz)   |
| 42           | CLKOA   | Clock output pin (See ■ TIMING CHART 1 to 4)  |
| 17           | CLKOB   | Clock output pin (See ■ TIMING CHART 1 to 4)  |
| 8            | V <sub>INA</sub>                                      | Analog input pin<br>Input range is V <sub>RT</sub> to V <sub>RB</sub> (0 V to 3.0 V: 2 Vp-p)  |
| 2<br>1<br>48 | V <sub>R1</sub><br>V <sub>R2</sub><br>V <sub>R3</sub> | Reference 1/4 voltage output pin (Add 0.1 μF for AV <sub>SS</sub> )<br>Reference 1/2 voltage output pin (Add 0.1 μF for AV <sub>SS</sub> )<br>Reference 3/4 voltage output pin (Add 0.1 μF for AV <sub>SS</sub> ) |
| 46           | V <sub>RT</sub>                                       | Reference voltage input pin on top side   |
| 47           | V <sub>REFT</sub>                                     | Reference voltage output pin<br>By connecting to V <sub>RT</sub> , 0.9 × AV <sub>DD</sub> (≈ 3 V) is generated.   |
| 6            | V <sub>RB</sub>                                       | Reference voltage input pin on bottom side  |
| 5            | V <sub>REFB</sub>                                     | Reference voltage output pin<br>By connecting to V <sub>RB</sub> , 0.3 × AV <sub>DD</sub> (≈ 1 V) is generated.   |


The values in parentheses are standard.

## ■ PRECAUTIONS ON USE

- Be sure to ground the pins of AV<sub>DD</sub>, DV<sub>DD</sub>, V<sub>RT</sub>, V<sub>RB</sub>, V<sub>R1</sub>, V<sub>R2</sub>, and V<sub>R3</sub> via high-frequency capacitor. Place the high-frequency capacitor as close as possible to the pin.
- To avoid generation of undesired current owing to indetermination of internal logic, set CĒ to "H" at powering on and input more than five clock pulses just after operation (CĒ: "H" → "L").

# MB40C328

## ■ BLOCK DIAGRAM

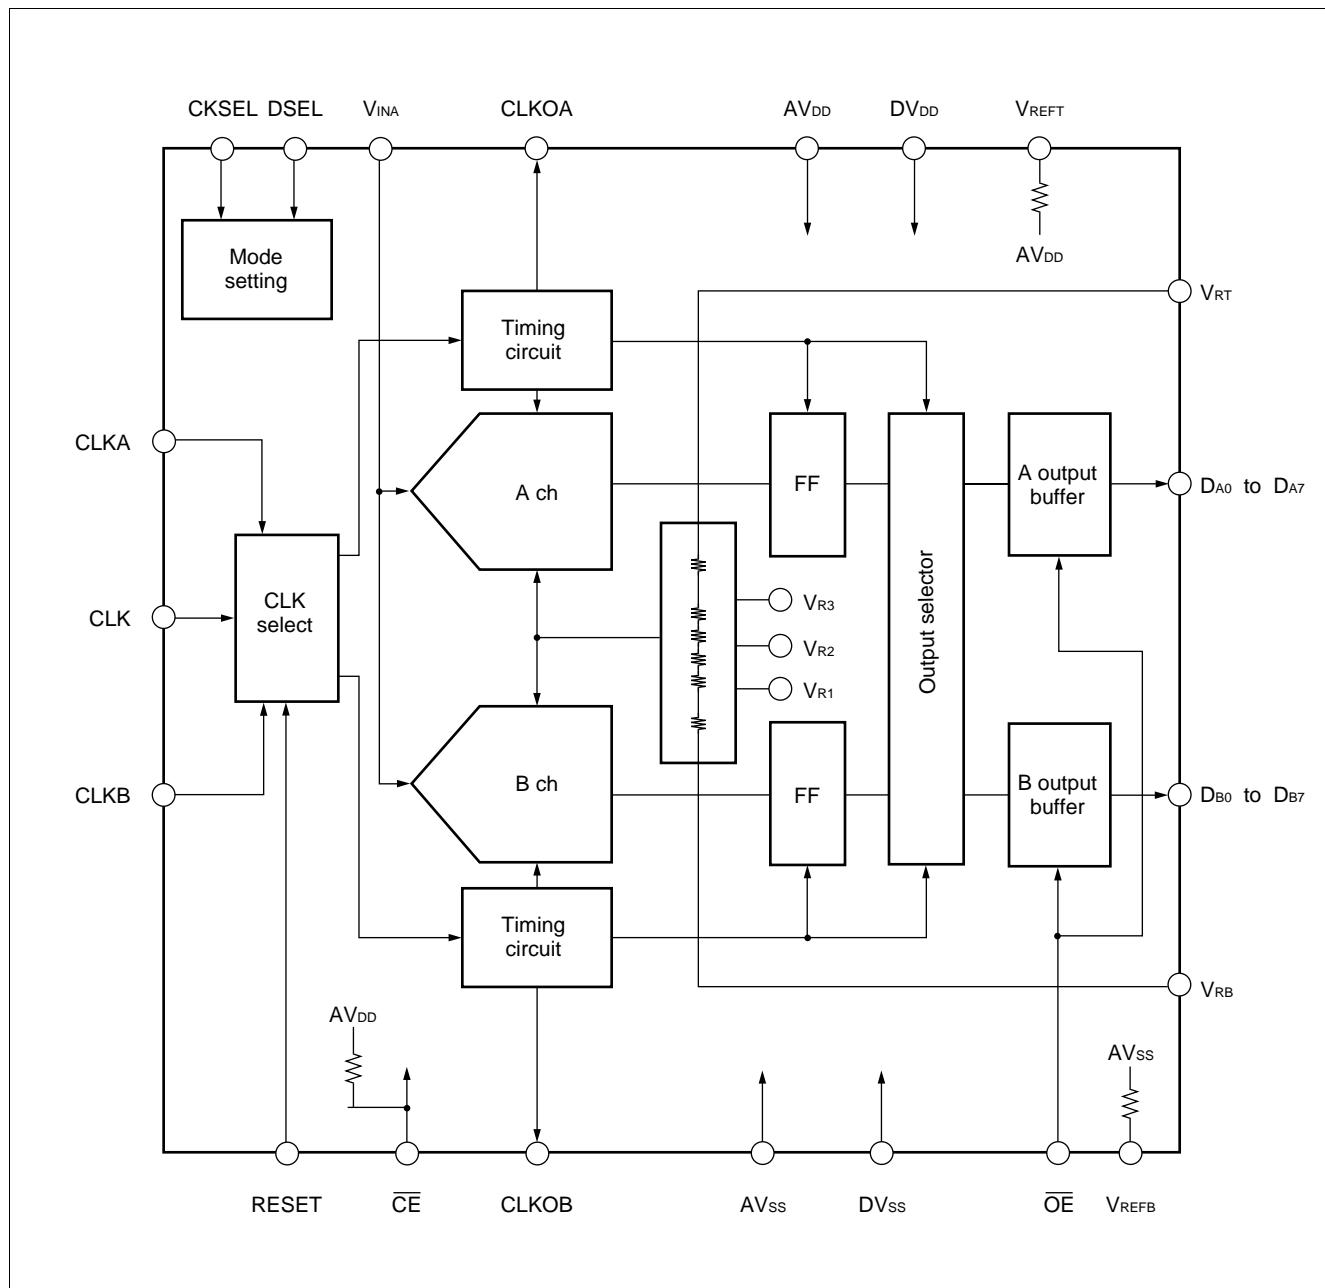

**■ ABSOLUTE MAXIMUM RATINGS**

| Parameter            | Symbol  | Rating |                 | Unit |
|----------------------|---|--------|-----------------|------|
|                      |   | Min.   | Max.            |      |
| Power supply voltage | $AV_{DD}$ , $DV_{DD}$   | -0.3   | +4.0            | V    |
| Input/output voltage | $V_{INA}$ , $V_{RT}$ , $V_{RB}$ ,<br>$V_{REFT}$ , $V_{REFB}$ ,<br>$V_{R1}$ , $V_{R2}$ , $V_{R3}$ , $\overline{CE}$ ,<br>CKSEL | -0.3   | $AV_{DD}+0.3^*$ | V    |
|                      | $D_{A0}$ to $D_{A7}$ , $D_{B0}$ to $D_{B7}$ ,<br>CLKOA, CLKOB,<br>CLKA, CLKB,<br>CLK, DSEL, $\overline{OE}$ ,<br>RESET        | -0.3   | $DV_{DD}+0.3^*$ | V    |
| Storage temperature  | $T_{STG}$   | -55    | +125            | °C   |

\* : Do not exceed +4.0 V.

**WARNING:** Semiconductor devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

# MB40C328

## ■ RECOMMENDED OPERATING CONDITIONS

| Parameter                                | Symbol   | Value     |                 |          | Unit        |
|--|--|-----------|-----------------|----------|-------------|
|  |  | Min.      | Typ.            | Max.     |             |
| Power supply voltage                     | $V_{DD}$ , $DV_{DD}$                           | 3.00      | 3.30            | 3.60     | V           |
| Analog input voltage                     | $V_{INA}$                                      | $V_{RB}$  | —               | $V_{RT}$ | V           |
| Analog reference voltage: T              | $V_{RT}$                                       | —         | —               | 3.00     | V           |
| Analog reference voltage: B              | $V_{RB}$                                       | 0.00      | —               | —        | V           |
| Analog reference voltage range           | $V_{RT} - V_{RB}$                              | 1.90      | 2.00            | 2.10     | V           |
| Digital "H" level input voltage          | $\overline{OE}$ , DSEL, RESET, CLK, CLKA, CLKB | $V_{IHD}$ | $DV_{DD} - 0.5$ | —        | V           |
|  | CKSEL, $\overline{CE}$                         |           | $AV_{DD} - 0.5$ | —        | V           |
| Digital "L" level input voltage          | $\overline{OE}$ , DSEL, RESET, CLK, CLKA, CLKB | $V_{ILD}$ | —               | —        | V           |
|  | CKSEL, $\overline{CE}$                         |           | —               | —        | V           |
| Digital input current                    | $I_{ID}$                                       | -20       | —               | 5        | $\mu A$     |
| Single-phase clock frequency             | $f_{CLK}$                                      | 0.1       | —               | 100      | MHz         |
| Two-phase clock frequency                | $f_{CLKA}$ , $f_{CLKB}$                        | 0.1       | —               | 50       | MHz         |
| Minimum clock pulse width (single-phase) | $tws^+$ , $tws^-$                              | 4.0       | 5.0             | —        | ns          |
| Minimum clock pulse width (two-phase)    | $twd^+$ , $twd^-$                              | 8.0       | 10.0            | —        | ns          |
| Clock pulse rising/falling time          | $t_r$ , $t_f$                                  | —         | 2.0             | —        | ns          |
| RESET signal setup time                  | $t_s$  | 3.0       | —               | —        | ns          |
| RESET signal hold time                   | $t_h$  | 3.0       | —               | —        | ns          |
| Operating temperature range              | $T_a$  | -20       | —               | 70       | $^{\circ}C$ |

**WARNING:** The recommended operating conditions are required in order to ensure the normal operation of the semiconductor device. All of the device's electrical characteristics are warranted when the device is operated within these ranges.

Always use semiconductor devices within their recommended operating condition ranges. Operation outside these ranges may adversely affect reliability and could result in device failure.

No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their FUJITSU representatives beforehand.

## ■ ELECTRICAL CHARACTERISTICS

### • DC Characteristics in Analog Section

(AV<sub>DD</sub> = DV<sub>DD</sub> = 3.00 V to 3.60 V, Ta = -20°C to +70°C)

| Parameter                    | Symbol            | Value                   |                         |                         | Unit |
|------------------------------|-------------------|-------------------------|-------------------------|-------------------------|------|
|                              |                   | Min.                    | Typ.                    | Max.                    |      |
| Resolution                   | —                 | —                       | 8                       | —                       | bit  |
| Linearity error              | LE                | —                       | ±0.40                   | ±0.6                    | %    |
| Differential linearity error | DLE               | —                       | ±0.20                   | ±0.36                   | %    |
| Analog input capacity        | C <sub>INA</sub>  | —                       | 22                      | —                       | pF   |
| Reference voltage: T         | V <sub>REFT</sub> | 0.88 × AV <sub>DD</sub> | 0.91 × AV <sub>DD</sub> | 0.94 × AV <sub>DD</sub> | V    |
| Reference voltage: B         | V <sub>REFB</sub> | 0.27 × AV <sub>DD</sub> | 0.3 × AV <sub>DD</sub>  | 0.33 × AV <sub>DD</sub> | V    |
| Reference current            | I <sub>RB</sub>   | -15                     | -10                     | —                       | mA   |
| Analog supply current        | I <sub>ADD</sub>  | —                       | 42.0                    | 85.0                    | mA   |
| Digital supply current       | I <sub>DID</sub>  | —                       | 20.0                    | 40.0                    | mA   |
| Standby current              | I <sub>SB</sub>   | —                       | 100                     | —                       | mA   |

### • DC Characteristics in Digital Section

(AV<sub>DD</sub> = DV<sub>DD</sub> = 3.00 V to 3.60 V, Ta = -20°C to +70°C)

| Parameter                        | Symbol           | Value                  |      |                  | Unit |
|----------------------------------|------------------|------------------------|------|------------------|------|
|                                  |                  | Min.                   | Typ. | Max.             |      |
| Digital "H" level output voltage | V <sub>OHD</sub> | DV <sub>DD</sub> - 0.4 | —    | DV <sub>DD</sub> | V    |
| Digital "L" level output voltage | V <sub>OLD</sub> | —                      | —    | 0.4              | V    |
| Digital "H" level output current | I <sub>OHD</sub> | -400                   | —    | —                | μA   |
| Digital "L" level output current | I <sub>OLD</sub> | —                      | —    | 1.6              | mA   |


# MB40C328

## • Switching Characteristics

(AV<sub>DD</sub> = DV<sub>DD</sub> = 3.00 V to 3.60 V, Ta = -20°C to +70°C)

| Parameter                 | Symbol          | Value              |                                    |                                    | Unit                              |
|---------------------------|-----------------|--------------------|------------------------------------|------------------------------------|-----------------------------------|
|                           |                 | Min.               | Typ.                               | Max.                               |                                   |
| Maximum conversion rate   | f <sub>S</sub>  | 100                | —                                  | —                                  | MSPS                              |
| Aperture time             | t <sub>AD</sub> | —                  | 1.7                                | —                                  | ns                                |
| Digital output delay time | Timing chart 1  | t <sub>pdS</sub>   | 2.5                                | 6.0                                | 9.0                               |
|                           |                 | t <sub>pdSO</sub>  | t <sub>ws</sub> <sup>+</sup> + 2.5 | t <sub>ws</sub> <sup>+</sup> + 6.0 | t <sub>ws</sub> <sup>+</sup> + 10 |
|                           | Timing chart 2  | t <sub>pdM1</sub>  | 2.5                                | 5.5                                | 10                                |
|                           |                 | t <sub>pdM1O</sub> | T + 2.5                            | T + 5.5                            | T + 10                            |
|                           | Timing chart 3  | t <sub>pdM2</sub>  | 2.5                                | 5.5                                | 10                                |
|                           |                 | t <sub>pdM2O</sub> | T + 2.5                            | T + 5.5                            | T + 10                            |
|                           | Timing chart 4  | t <sub>pdD</sub>   | 2.5                                | 6.5                                | 11                                |
|                           |                 | t <sub>pdDO</sub>  | t <sub>WD</sub> <sup>+</sup> + 2.5 | t <sub>WD</sub> <sup>+</sup> + 6.5 | t <sub>WD</sub> <sup>+</sup> + 11 |

## ■ DIGITAL OUTPUT BUFFER LOAD CIRCUIT

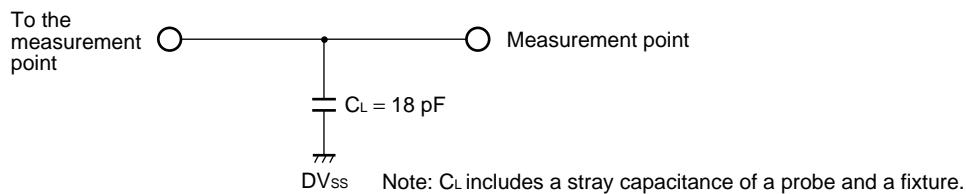


## ■ MODE SETTING

| CKCEL | DCEL | Mode  | Timing Chart   |
|-------|------|---|----------------|
| H     | H    | CLK input-straight output mode                | Timing chart 1 |
| H     | L    | CLK input-demultiplex output (in-phase) mode  | Timing chart 2 |
| L     | H    | CLK input-demultiplex output (two-phase) mode | Timing chart 3 |
| L     | L    | Two-phase CLK input mode (CLKA, CLKB)         | Timing chart 4 |

## ■ TIMING CHART 1

CLK input-straight output mode

- CLK = 100 MHz (max)
- CLKA = CLKB = "L" ( $DV_{SS}$ )
- CKSEL = "H" ( $AV_{DD}$ )
- DSEL = "H" ( $DV_{DD}$ )
- RESET = "H" ( $DV_{DD}$ )
- $\overline{CE}$  = "L" ( $AV_{SS}$ )
- $\overline{OE}$  = "L" ( $DV_{SS}$ )

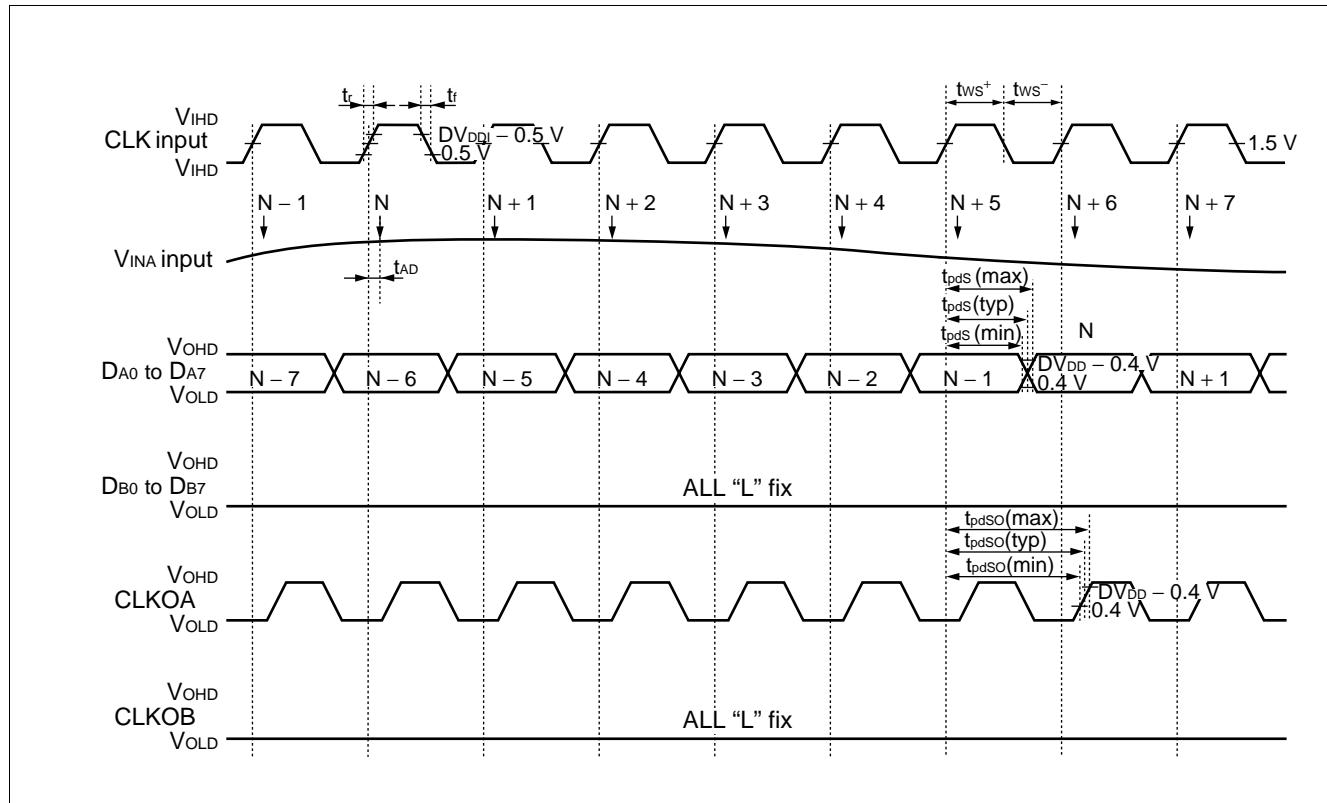


- $V_{INA}$  input — Sampling at CLK rising
- $D_{A0}$  to  $D_{A7}$  — Output (after 5 CLK +  $t_{pdS}$  from Sampling) at CLK rising

# MB40C328

## ■ TIMING CHART 2

CLK input-demultiplex output (in-phase) mode

- CLK = 100 MHz (max)
- CLKA = CLKB = "L" (DV<sub>SS</sub>)
- CKSEL = "H" (AV<sub>DD</sub>)
- DSEL = "L" (DV<sub>SS</sub>)
- CĒ = "L" (AV<sub>DD</sub>)
- OĒ = "L" (DV<sub>SS</sub>)

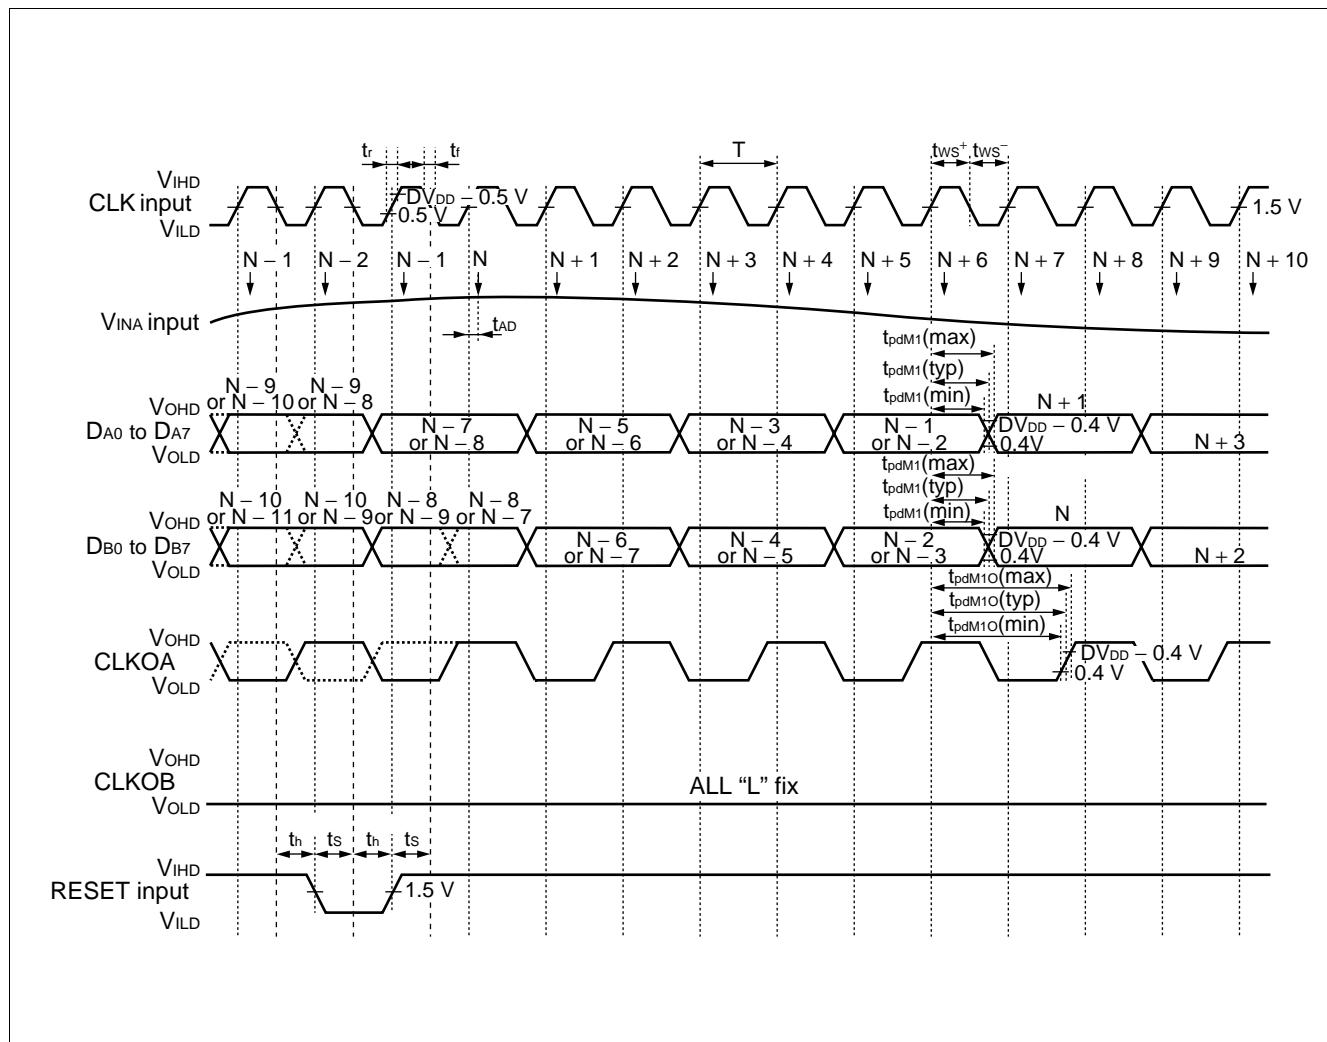


- $V_{INA}$  input — Sampling at CLK rising
- DA<sub>0</sub> to DA<sub>7</sub> — Output (after 5 CLK +  $t_{pdM1}$  from Sampling) at CLK rising
- DB<sub>0</sub> to DB<sub>7</sub> — Output (after 6 CLK +  $t_{pdM1}$  from Sampling) at CLK rising

## ■ TIMING CHART 3

CLK input-demultiplex output (two-phase) mode

- CLK = 100 MHz (max)
- CLKA = CLKB = "L" ( $DV_{SS}$ )
- CKSEL = "L" ( $AV_{SS}$ )
- DSEL = "H" ( $DV_{DD}$ )
- $\overline{CE}$  = "L" ( $AV_{SS}$ )
- $\overline{OE}$  = "L" ( $DV_{SS}$ )

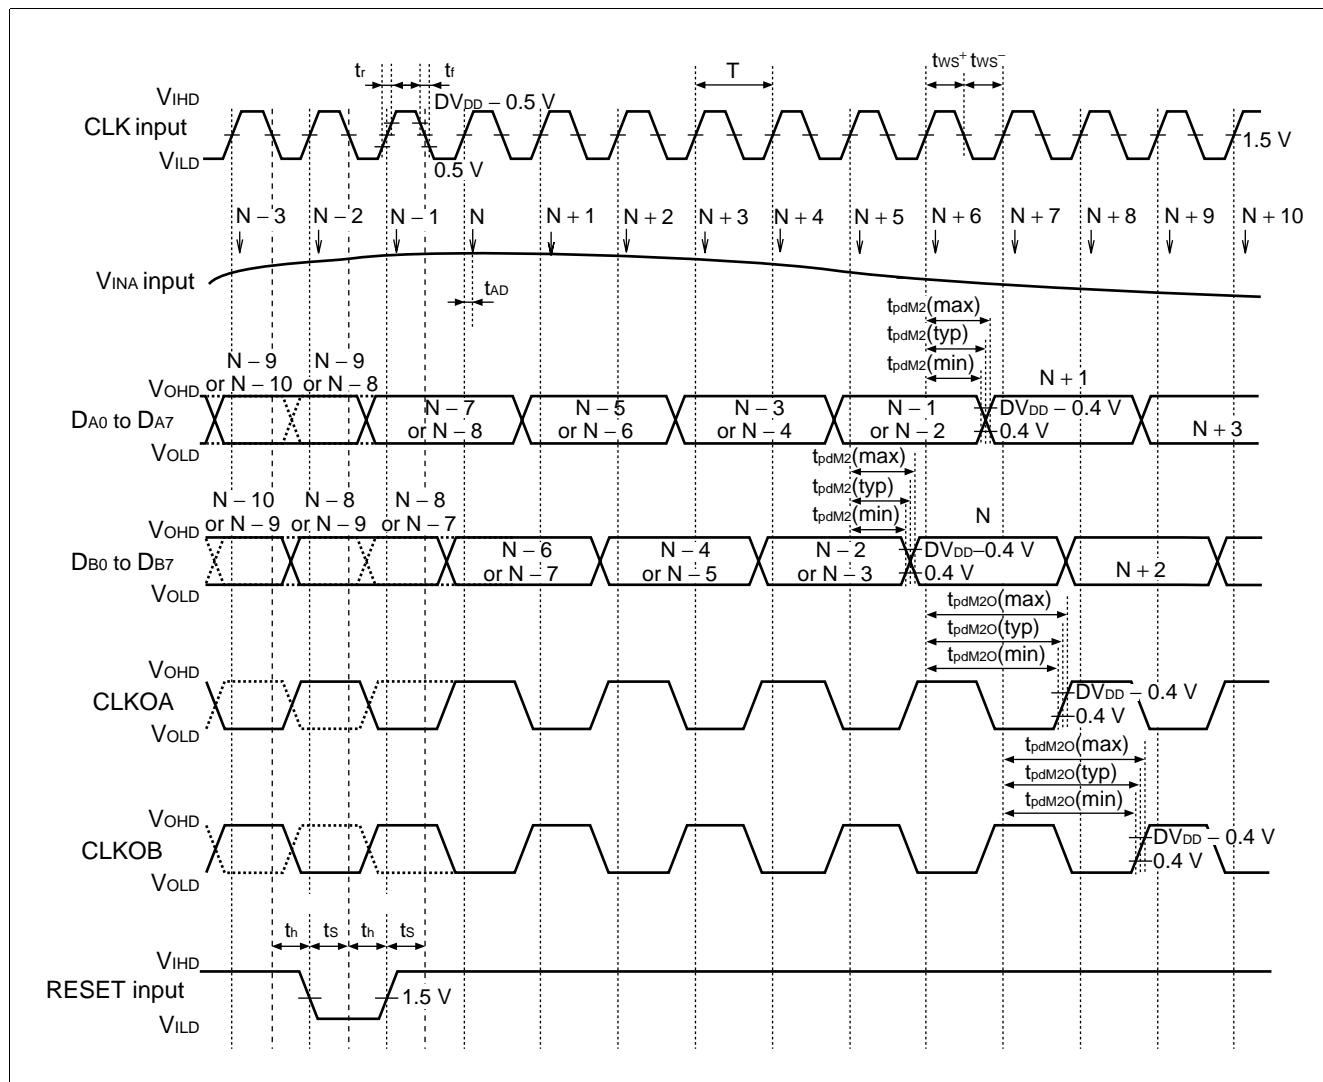


- $V_{INA}$  input — Sampling at CLK rising
- $D_{A0}$  to  $D_{A7}$  — Output (after 5 CLK +  $t_{pdM2}$  from Sampling) at CLK rising
- $D_{B0}$  to  $D_{B7}$  — Output (after 5 CLK +  $t_{pdM2}$  from Sampling) at CLK rising

# MB40C328

## ■ TIMING CHART 4


Two-phase CLK input mode (CLKA, CLKB)

- CLK = “L” ( $DV_{SS}$ ) or “H” ( $DV_{DD}$ )
- CLKA = CLKB = 50 MHz (max)
- CKSEL = “L” ( $AV_{SS}$ )
- DSEL = “L” ( $DV_{SS}$ )
- RESET = “H” ( $DV_{DD}$ ) or “L” ( $DV_{SS}$ )
- $\overline{CE}$  = “L” ( $AV_{SS}$ )
- $\overline{OE}$  = “L” ( $DV_{SS}$ )

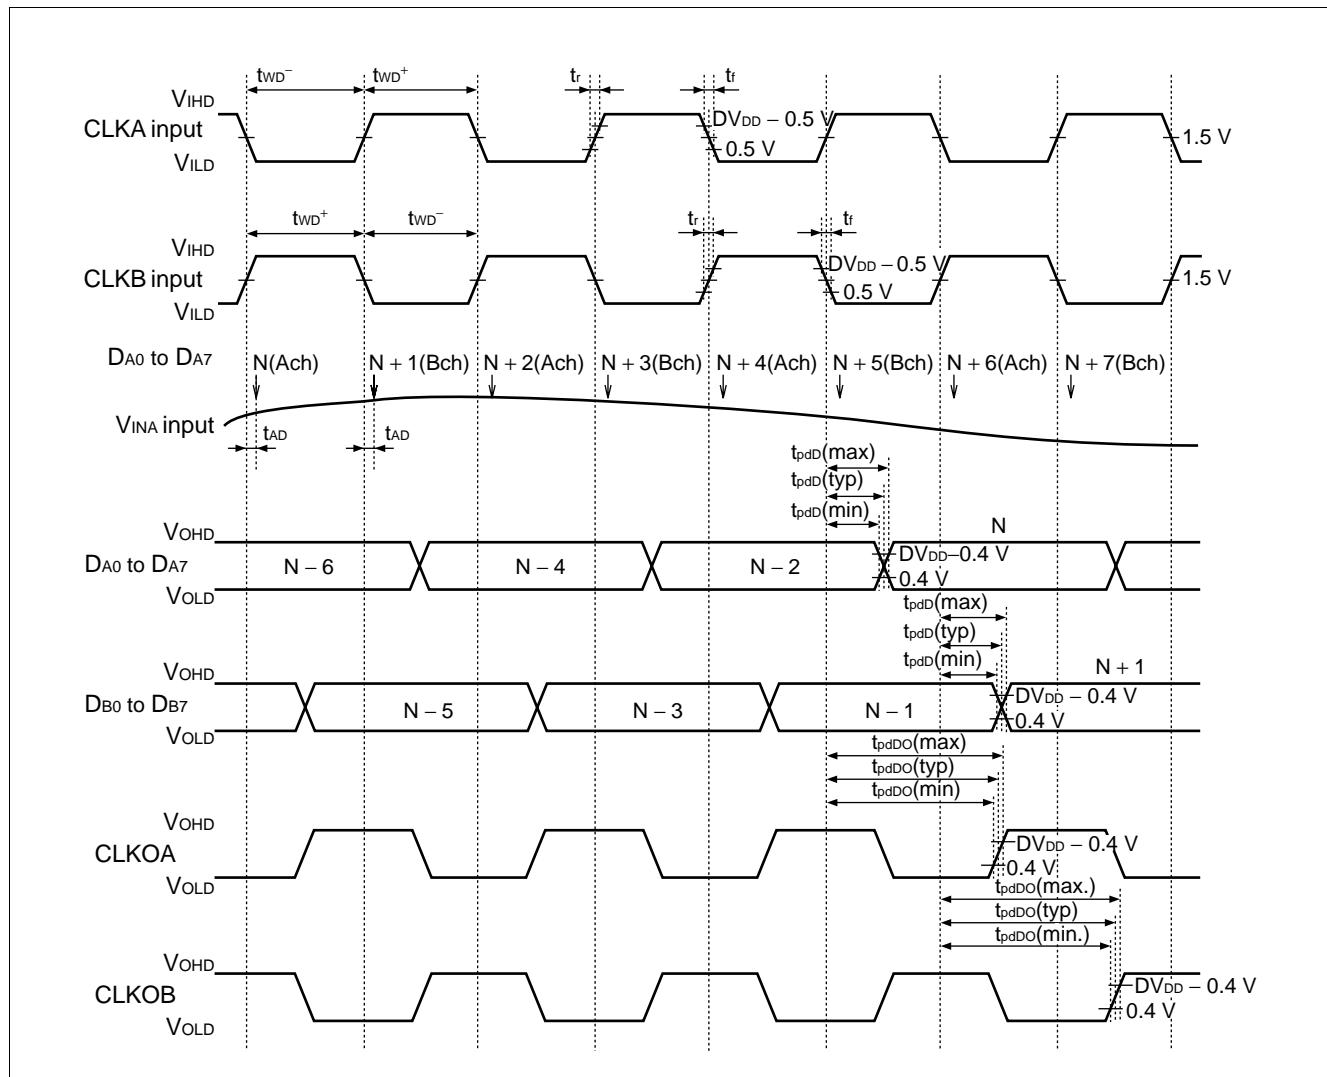

- $V_{INA}$  input — Sampling (A ch) at CLKA falling  
Sampling (B ch) at CLKB falling
- $D_{A0}$  to  $D_{A7}$  — Output (after 2.5 CLK +  $t_{pdD}$  from Sampling) at CLKA rising
- $D_{B0}$  to  $D_{B7}$  — Output (after 2.5 CLK +  $t_{pdD}$  from Sampling) at CLKB rising

## ■ TYPICAL CONNECTION EXAMPLE

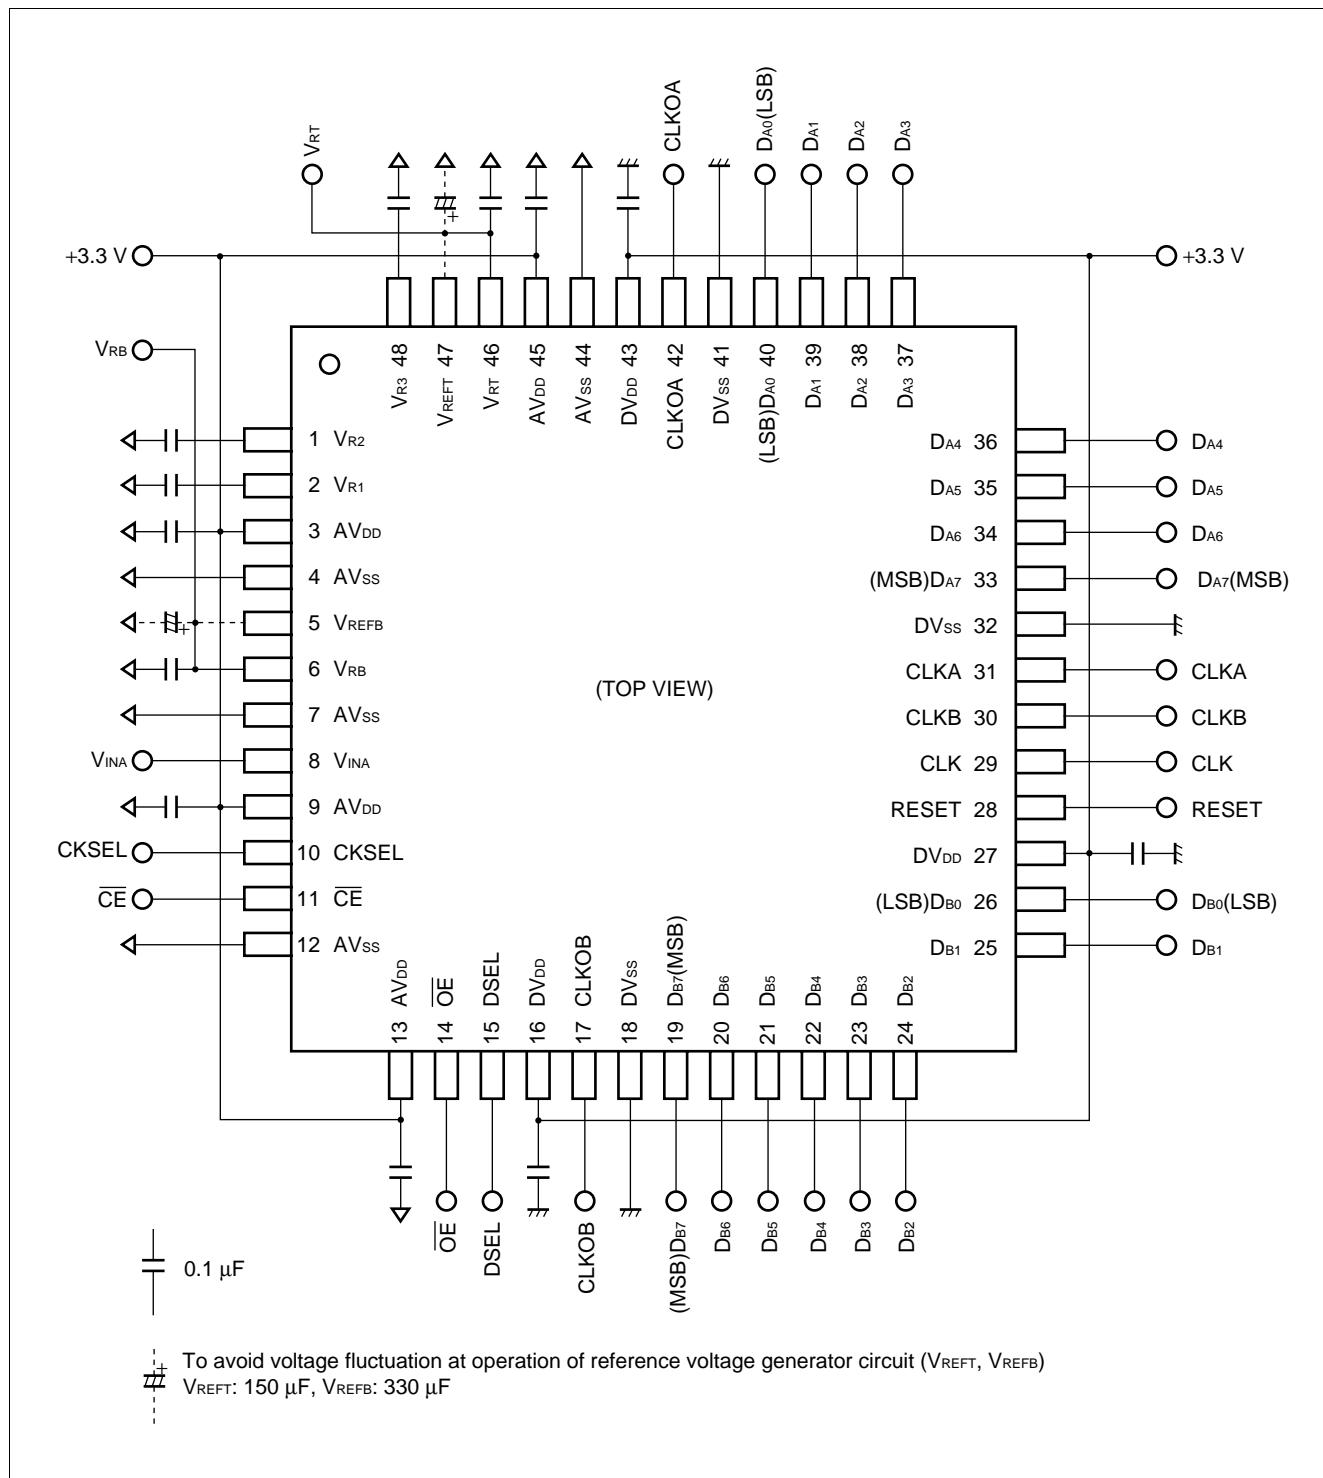

# MB40C328


## ■ ORDERING INFORMATION

| Part number | Package                              | Remark |
|-------------|--------------------------------------|--------|
| MB40C328PFV | 48-pin Plastic LQFP<br>(FPT-48P-M05) |        |

## ■ PACKAGE DIMENSION

48-pin Plastic LQFP  
(FPT-48P-M05)

Note ) Pins width and pins thickness include plating thickness.

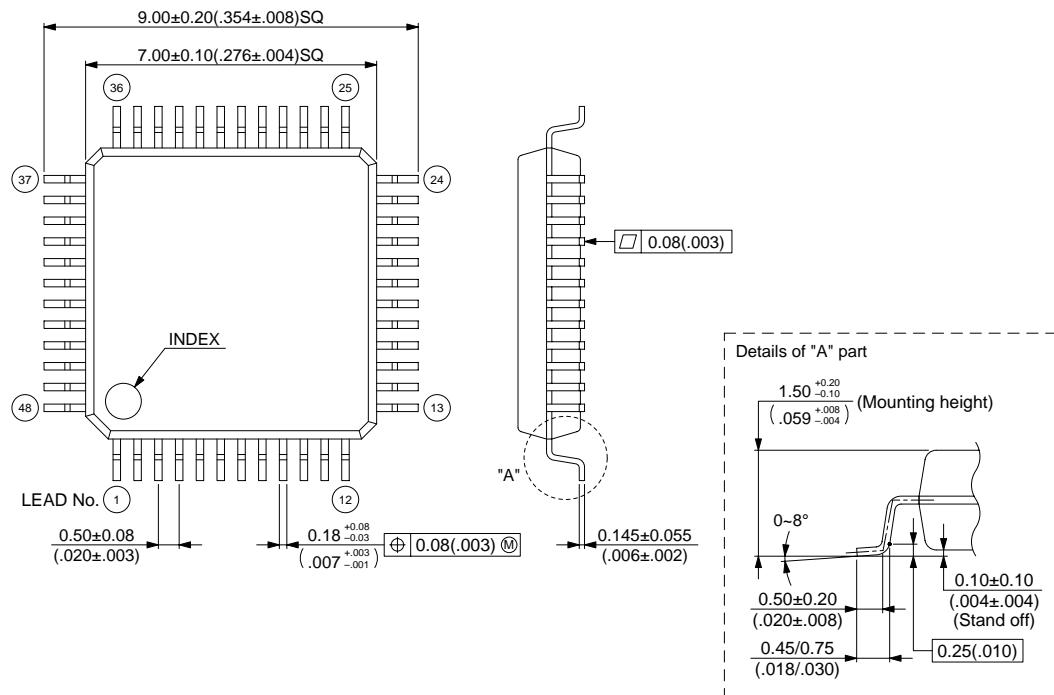

## FUJITSU LIMITED

*For further information please contact:*

### **Japan**

FUJITSU LIMITED  
Corporate Global Business Support Division  
Electronic Devices  
KAWASAKI PLANT, 4-1-1, Kamikodanaka,  
Nakahara-ku, Kawasaki-shi,  
Kanagawa 211-8588, Japan  
Tel: +81-44-754-3763  
Fax: +81-44-754-3329  
<http://www.fujitsu.co.jp/>

### **North and South America**

FUJITSU MICROELECTRONICS, INC.  
3545 North First Street,  
San Jose, CA 95134-1804, USA  
Tel: +1-408-922-9000  
Fax: +1-408-922-9179  
  
Customer Response Center  
*Mon. - Fri.: 7 am - 5 pm (PST)*  
Tel: +1-800-866-8608  
Fax: +1-408-922-9179  
<http://www.fujitumicro.com/>

### **Europe**

FUJITSU MICROELECTRONICS EUROPE GmbH  
Am Siebenstein 6-10,  
D-63303 Dreieich-Buchschlag,  
Germany  
Tel: +49-6103-690-0  
Fax: +49-6103-690-122  
<http://www.fujitsu-fme.com/>

### **Asia Pacific**

FUJITSU MICROELECTRONICS ASIA PTE LTD  
#05-08, 151 Lorong Chuan,  
New Tech Park,  
Singapore 556741  
Tel: +65-281-0770  
Fax: +65-281-0220  
<http://www.fmap.com.sg/>

All Rights Reserved.

The contents of this document are subject to change without notice.

Customers are advised to consult with FUJITSU sales representatives before ordering.

The information and circuit diagrams in this document are presented as examples of semiconductor device applications, and are not intended to be incorporated in devices for actual use. Also, FUJITSU is unable to assume responsibility for infringement of any patent rights or other rights of third parties arising from the use of this information or circuit diagrams.

The contents of this document may not be reproduced or copied without the permission of FUJITSU LIMITED.

FUJITSU semiconductor devices are intended for use in standard applications (computers, office automation and other office equipments, industrial, communications, and measurement equipments, personal or household devices, etc.).

#### **CAUTION:**

Customers considering the use of our products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage, or where extremely high levels of reliability are demanded (such as aerospace systems, atomic energy controls, sea floor repeaters, vehicle operating controls, medical devices for life support, etc.) are requested to consult with FUJITSU sales representatives before such use. The company will not be responsible for damages arising from such use without prior approval.

Any semiconductor devices have inherently a certain rate of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Control Law of Japan, the prior authorization by Japanese government should be required for export of those products from Japan.