
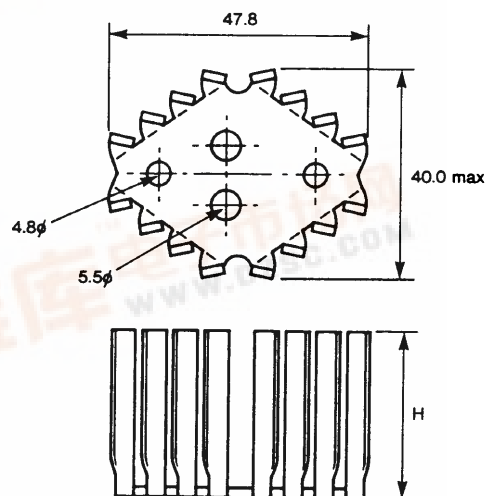


PF515 PF516 Heatsink - T03

Space saving design together with good thermal efficiency. Available in two fin heights.




Finish: Black anodised.

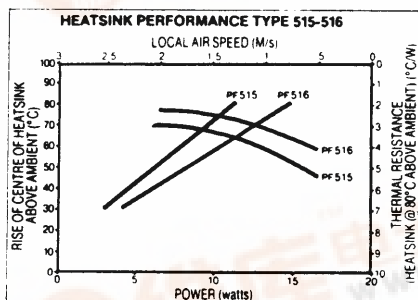

PF523 PF526 PF527 Heatsink - T03

Space saving heatsinks clamp over T03 case without disturbing the device connections and using almost no additional board space.




Finish: Black anodised.

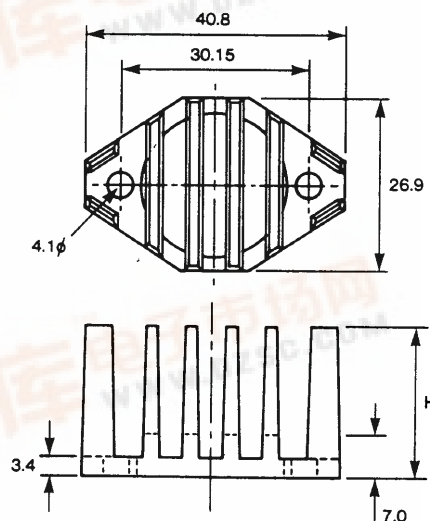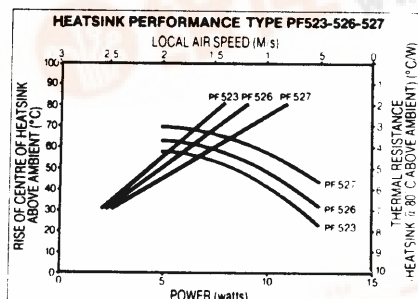

AV16 Heatsink - T03 AV17 Heatsink - T0220 (x 2)

4 sided heatsink with alternate sloping vanes designed for maximum dissipation surface and low unit cost.

Finish: Black anodised

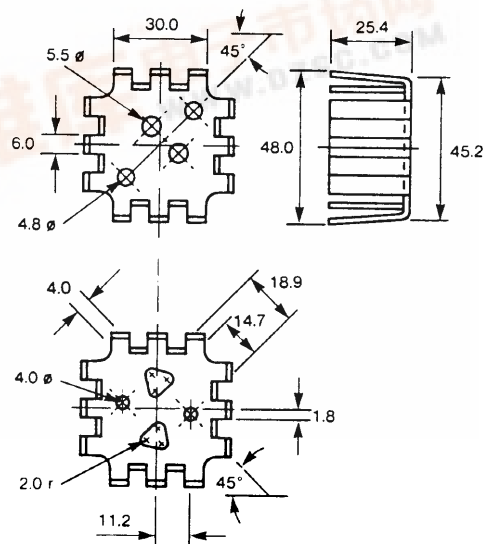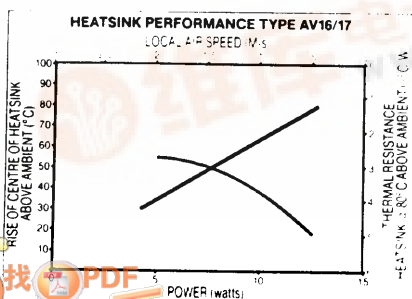

AV16 T03 $\Theta = 6^\circ \text{C/W}$
 AV17 T0220 (x2) $\Theta = 6^\circ \text{C/W}$

Standard Hole Patterns


T03

Available in all standard lengths of the following powersink types:

L LA MA MB MD ME MH MK Q T W Y


To order, add -2 to the length/type code.
 e.g. 4L-2 6W-2 etc.

M type is also available but should be ordered as 2M-16 etc.

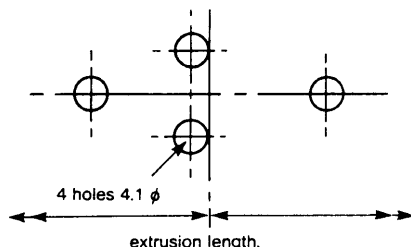

2 x T03

Length 'L'	Dimn 'A'
100mm	26.3
4"	27.1
6"/150mm	46.2

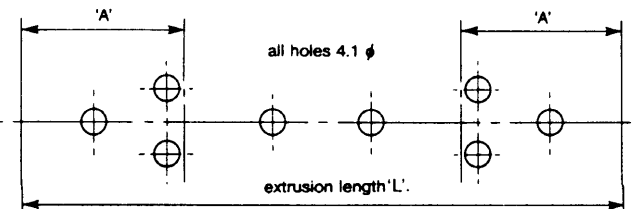


Available in standard lengths of the following types:

L LA M MA MB MD ME MH MK Q T W


To order, add -4 to the length/type code.
 e.g. 4Q-4 MK150-4 etc.

2 x T03 (Y)

Dimn 'A'
3.5Y-4 21.5
4Y-4 27.8
6Y-4 43.6

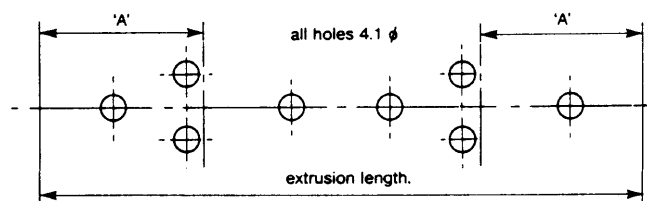

T066




3M-3 4M-3

2Y-3 3Y-3 3.5Y-3 4Y-3

T066 hole pattern in other lengths and extrusions to order.

T03 (MG)

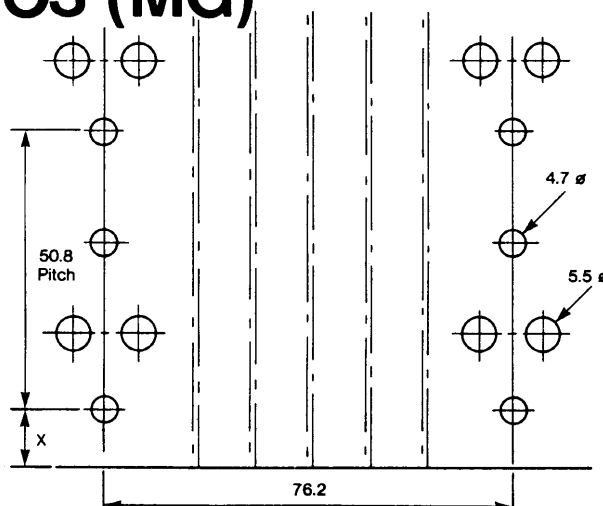


3MG-8 (2 x T03) x = 23

4MG-10 (4 x T03) x = 10.3

6MG-14 (6 x T03) x = 10.3

8MG-22 (8 x T03) x = 10.3

TO220 (MC)

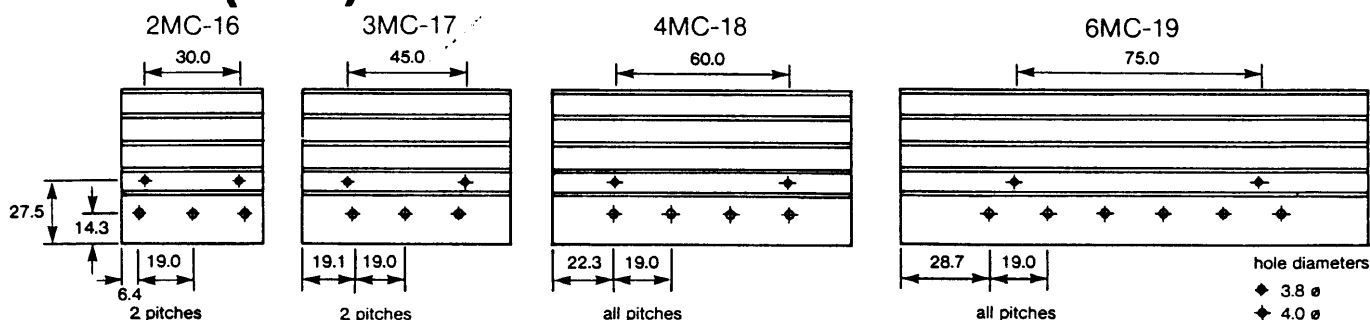

Installation Notches

Standard installation notches available in types P PC and PD
 Number of notches and position to order.

