

SERIES P197 SWITCHES

POWER PUSHBUTTON SERIES



SPECIFICATIONS


Rating:	10A @ 125 VAC - UL, CUL 5A @ 250 VAC - UL, CUL, VDE TV-5 @ 125 VAC - UL, CUL In Rush, 80A @ 250 VAC - VDE
Electrical Life:	10,000 cycles
Contact Resistance:	100mΩ max. typical; initial @ 2-4 VDC
Dielectric Strength:	> 1,500 volts 1 minute > 3,000 volts between poles
Operating Force:	300 ±100 gram force

MATERIALS

Housing:	6/6 Nylon
Actuator:	Acetal
Bracket:	Tin plated steel
Contacts:	Silver plated copper alloy
Terminals:	Silver plated copper alloy



HOW TO ORDER

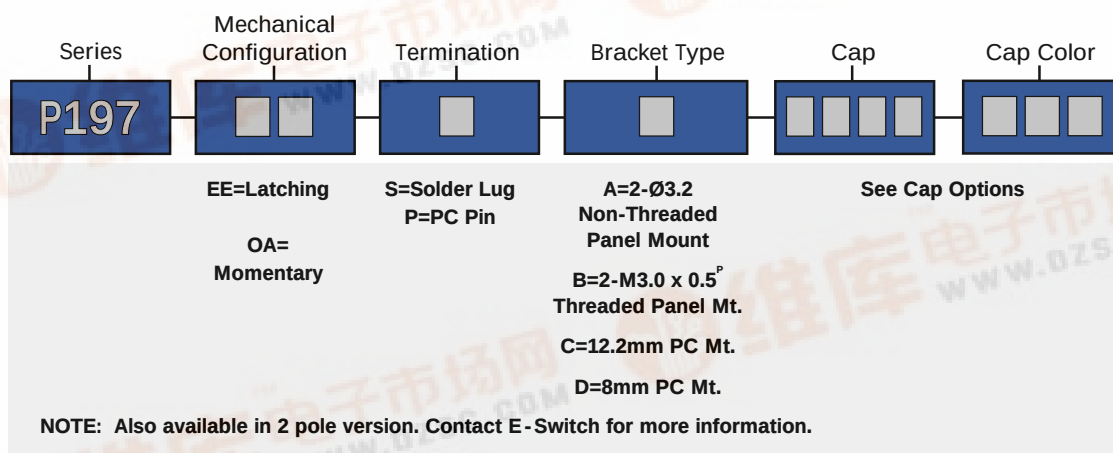


EXAMPLE


P197 → EE → P → B → TA12 → BLU

TERMINATION OPTIONS

S



P



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

