

# MN65742

6-Bit, 2-Channel CMOS A/D Converter

## ■ Overview

The MN65742 is a 6-bit, 2-channel CMOS analog-to-digital converter. It uses a totally parallel structure based on differential comparators to achieve high-speed operation.

## ■ Features

- Resolution: 6 bits
- Maximum conversion rate: 60 MSPS (min.)
- Linearity error:  $\pm 1.3$  LSB (typ.)
- Differential linearity error:  $\pm 1.3$  LSB (typ.)
- Analog input voltage level:  
1.5 V<sub>p-p</sub> (typ.) (1.0 to 2.5 V)
- Power supply voltage:  $5.0 \pm 0.25$  V  
3.0 to 5.25 V (power supply for output pins)
- Power consumption: 250 mW (typ.) ( $F_C = 60$  MSPS,  
not including reference current)

## ■ Applications

- Digital satellite broadcasting receivers
- Digital video equipment
- Multimedia equipment
- Communications equipment


## ■ Pin Assignment

CLK	1	28	DA5
AV <sub>DD</sub>	2	27	DA4
AV <sub>SS</sub>	3	26	DA3
VRT	4	25	DA2
N.C.	5	24	DA1
VINA	6	23	DA0
AV <sub>SS</sub>	7	22	AV <sub>SS</sub>
AV <sub>DD</sub>	8	21	AV <sub>DDL</sub>
POWD	9	20	DB5
VRM	10	19	DB4
V <sub>INB</sub>	11	18	DB3
VRB	12	17	DB2
AV <sub>SS</sub>	13	16	DB1
AV <sub>DD</sub>	14	15	DB0

(TOP VIEW)

SOP028-P-0375

## ■ Block Diagram

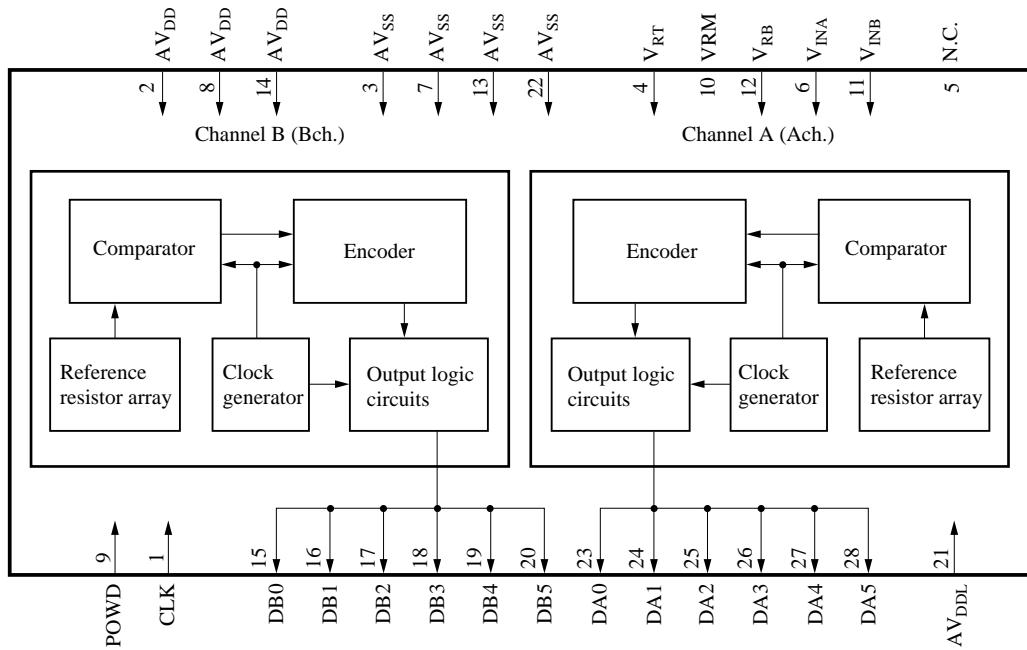

### ■ Pin Descriptions

Pin No.	Symbol	Function Descriptions
1	CLK	Clock input
2	AV <sub>DD</sub>	Power supply for analog circuits
3	AV <sub>SS</sub>	Ground for analog circuits
4	V <sub>RT</sub>	Reference voltage (top)
5	N.C.	No connection
6	V <sub>INA</sub>	Analog signal input pin
7	AV <sub>SS</sub>	Ground for analog circuits
8	AV <sub>DD</sub>	Power supply for analog circuits
9	POWD	Power-down selection pin
10	VRM	Intermediate reference voltage
11	V <sub>INB</sub>	Analog signal input pin
12	V <sub>RB</sub>	Reference voltage (bottom)
13	AV <sub>SS</sub>	Ground for analog circuits
14	AV <sub>DD</sub>	Power supply for analog circuits
15	DB0	Digital output pin
16	DB1	Digital output pin
17	DB2	Digital output pin
18	DB3	Digital output pin
19	DB4	Digital output pin
20	DB5	Digital output pin
21	AV <sub>DDL</sub>	Power supply pin for digital output circuits
22	AV <sub>SS</sub>	Ground for analog circuits
23	DA0	Digital output pin
24	DA1	Digital output pin
25	DA2	Digital output pin
26	DA3	Digital output pin
27	DA4	Digital output pin
28	DA5	Digital output pin

### ■ Absolute Maximum Ratings $T_a=25^\circ C$

Parameter	Symbol	Rating	Unit
Power supply voltage	AV <sub>DD</sub>	-0.3 to +7.0	V
Power supply voltage for output circuits	AV <sub>DDL</sub>	-0.3 to AV <sub>DD</sub> +0.3	V
Input voltage	V <sub>I</sub>	-0.3 to AV <sub>DD</sub> +0.3	V
Output voltage	V <sub>O</sub>	-0.3 to AV <sub>DD</sub> +0.3	V
Operating ambient temperature	T <sub>opr</sub>	-20 to +70	°C
Storage temperature	T <sub>sg</sub>	-55 to +125	°C

**■ Recommended Operating Conditions** AV<sub>DD</sub>=5.0V, AV<sub>DDL</sub>=3.3V, AV<sub>SS</sub>=0V, Ta=25°C


Parameter		Symbol	min	typ	max	Unit
Power supply voltage		V <sub>DD</sub>	4.75	5.00	5.25	V
Power supply voltage for digital outputs		DV <sub>DDL</sub>	3.00	3.30	5.25	V
Digital input voltage	"H" level	V <sub>IH</sub>	2.2		AV <sub>DD</sub>	V
	"L" level	V <sub>IL</sub>	AV <sub>SS</sub>		0.8	V
Reference voltage	"H" level	V <sub>RT</sub>	2.0	2.5	3.5	V
	"L" level	V <sub>RB</sub>	0.5	1.0	2.0	V
Clock	"H" level pulse width	t <sub>WH</sub>	7			ns
	"L" level pulse width	t <sub>WL</sub>	7			ns
Analog input voltage		V <sub>AIN</sub>	AV <sub>SS</sub>		AV <sub>DD</sub>	V

**■ Electrical Characteristics** AV<sub>DD</sub>=5.0V, AV<sub>DDL</sub>=3.3V, AV<sub>SS</sub>=0V, V<sub>RT</sub>=2.5V, V<sub>RB</sub>=1.0V, Ta=25°C

Parameter		Symbol	Conditions	min	typ	max	Unit
Current consumption	AV <sub>DD</sub>	I <sub>DD</sub>	f <sub>CLK</sub> = 60 MSPS (not including reference current)		47	80	mA
	AV <sub>DDL</sub>	I <sub>DDL</sub>			3	6	mA
Resolution		RES			6		bit
Linearity error		E <sub>L</sub>	f <sub>CLK</sub> =60MSPS		±0.7	±1.3	LSB
Differential linearity error		E <sub>D</sub>			±0.7	±1.3	LSB
Maximum conversion rate	F <sub>C(max.)</sub>			60			MSPS
Clock frequency	f <sub>CLK</sub>			1		60	MHz
Analog input dynamic range	D <sub>R</sub>			1.4		V <sub>RT</sub> -V <sub>RB</sub>	V
Output current	"H" level	I <sub>OH</sub>	V <sub>OH</sub> =DV <sub>DDL</sub> - 0.8V			-2.0	mA
	"L" level	I <sub>OL</sub>	V <sub>OL</sub> =0.4V	2.0			mA
Output delay time	t <sub>d</sub>	C <sub>L</sub> =20pF		3	7	11	ns
Analog input capacitance	C <sub>I</sub>				20		pF

### ■ Timing Chart

The chip samples the analog input at the rising edge of the clock signal and provides the corresponding digital output one clock cycle later at the rising edge of the clock signal.

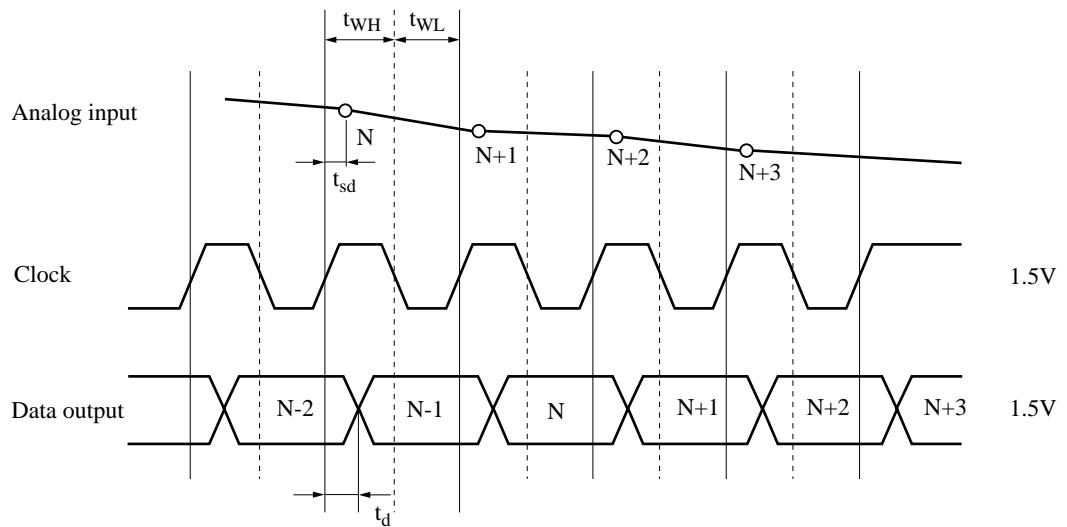

Note: The circles indicate analog signal sampling points.

## ■ Package Dimensions (Unit:mm)

SOP028-P-0375

