
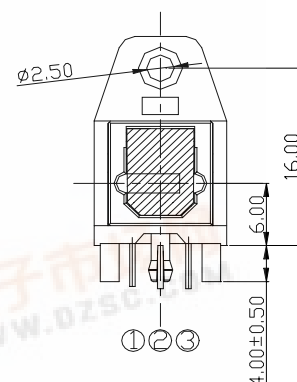
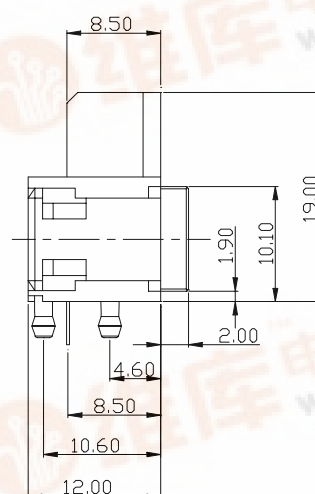



MOF-R3C6

Outline Dimensions

-

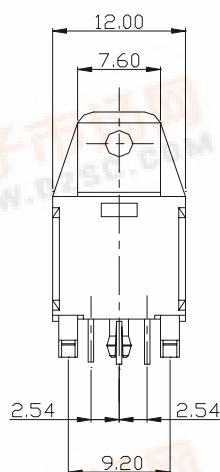

Recommended drilling as viewd from the soldering face

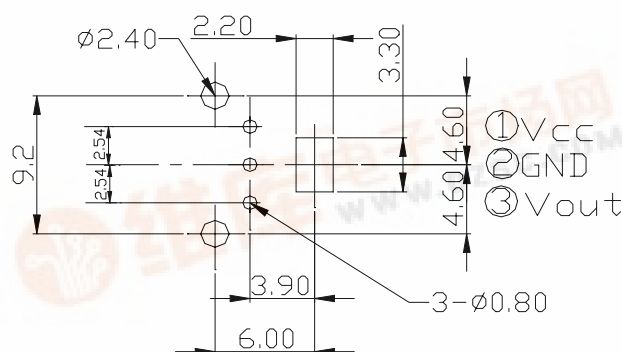

Tolerance is $\pm 0.3\text{mm}$ unless otherwise noted.

@ $T_A=25^{\circ}\text{C}$

Absolute Maximum Ratings


Parameter	Symbol	Rating	Unit
Supply voltage	V_{cc}	-0.5 to + 6	V
High Level Output Current	I_{OH}	-1	mA
Low Level Output Current	I_{OL}	5	mA
Operating temperature	T_{opr}	-20 to +70	°C
Storage temperature	T_{stg}	-30 to +80	°C
Soldering Temperature	T_{sol}	260*	°C

* For 5s (1 times or less)

Recommended Operating Conditions

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
Operating supply voltage	V_{cc}	4.75	5.0	5.25	V
Operating transfer rate	T	0.1	---	13.2	Mbps
receiver input optical power level	P_c	-24	---	-14.5	dBm



Recommended Connection Method

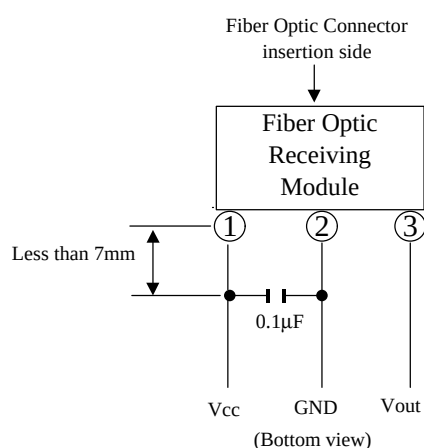

Electro-Optical Characteristics

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Dissipation current	I_{cc}	Refer to Fig. 1	---	15	40	mA
High level output voltage	V_{OH}	Refer to Fig. 2	2.4	4.8	---	V
Low level output voltage	V_{OL}	Refer to Fig. 2	---	0.2	0.4	V
Rise time	t_r	Refer to Fig. 2	---	10	20	ns
Fall time	t_f	Refer to Fig. 2	---	10	20	ns
Low →High delay time	t_{pLH}	Refer to Fig. 2	---	100	180	ns
High →Low delay time	t_{pHL}	Refer to Fig. 2	---	100	180	ns
Pulse width distortion	Δ_{tw}	Refer to Fig. 2	-15	---	+15	ns


Fig. 1 Measuring Method of Supply Current.

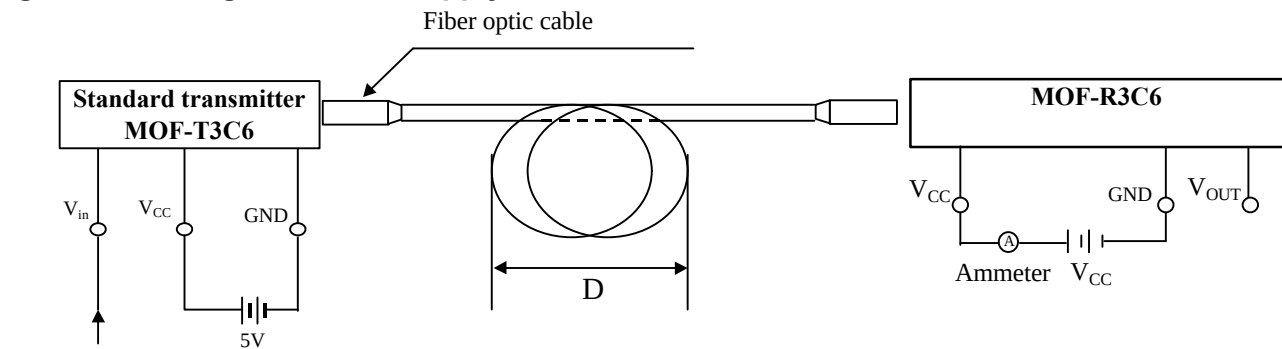

13.2 Mbps NRZ, Duty 50% or 6.6 Mbps biphase mark PRBS signal

- Notes
- (1) $V_{cc}=5.0V$ (State of operating)
 - (2) To bundle up the standard fiber optic cable, make it into a loop with the diameter $D=10cm$ or more.
 - (3) $P_c = -14.5 \text{ dBm}$
 - (4) Measured on an ammeter.

Fig. 2 Measuring Method of Output Voltage and Pulse Response

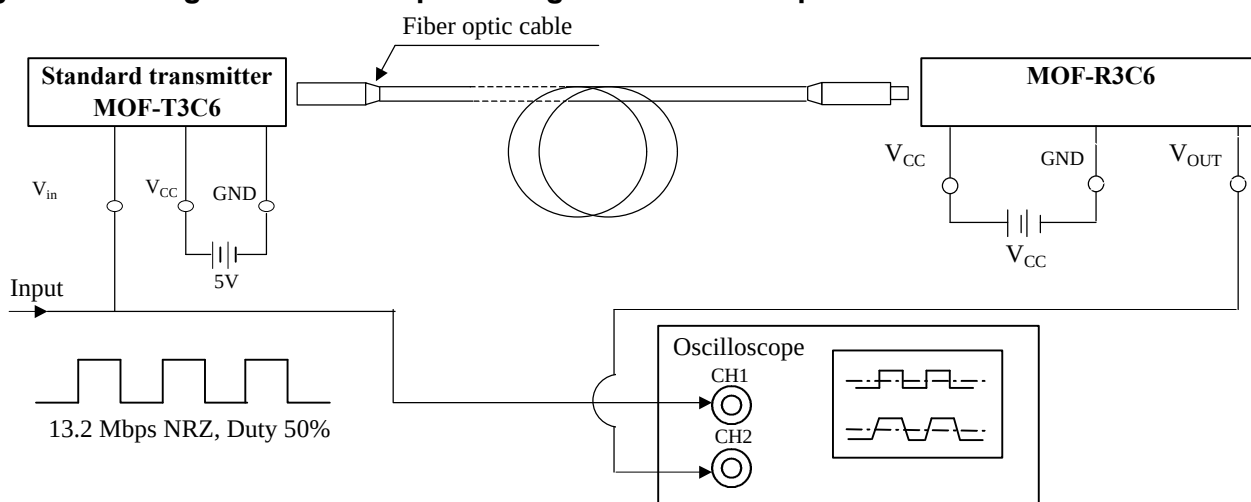

Test item

Test item	Symbol
Low → High pulse delay time	t_{PLH}
High → Low pulse delay time	t_{PHL}
Rise time	t_r
Fall time	t_f
Pulse width distortion $\Delta tw = t_{PHL} - t_{PLH}$	Δtw
High level output voltage	V_{OH}
Low level output voltage	V_{OL}

