



# Amplifier Transistor

## NPN Silicon

**MPS6428**



CASE 29-04, STYLE 1  
 TO-92 (TO-226AA)

### MAXIMUM RATINGS

| Rating   | Symbol         | Value       | Unit           |
|--|----------------|-------------|----------------|
| Collector–Emitter Voltage  | $V_{CEO}$      | 50          | Vdc            |
| Collector–Base Voltage   | $V_{CBO}$      | 60          | Vdc            |
| Emitter–Base Voltage   | $V_{EBO}$      | 6.0         | Vdc            |
| Collector Current — Continuous   | $I_C$          | 200         | mAdc           |
| Total Device Dissipation @ $T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ | $P_D$          | 625<br>5.0  | mW<br>mW/°C    |
| Total Device Dissipation @ $T_C = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ | $P_D$          | 1.5<br>12   | Watts<br>mW/°C |
| Operating and Storage Junction<br>Temperature Range                                    | $T_J, T_{stg}$ | -55 to +150 | °C             |

### THERMAL CHARACTERISTICS

| Characteristic                          | Symbol          | Max  | Unit |
|---|-----------------|------|------|
| Thermal Resistance, Junction to Ambient | $R_{\theta JA}$ | 200  | °C/W |
| Thermal Resistance, Junction to Case    | $R_{\theta JC}$ | 83.3 | °C/W |

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Max | Unit |
|----------------|--------|-----|-----|------|
|----------------|--------|-----|-----|------|

### OFF CHARACTERISTICS

|  |               |    |       |               |
|--|---------------|----|-------|---------------|
| Collector–Emitter Breakdown Voltage<br>( $I_C = 1.0 \text{ mAdc}, I_B = 0$ ) | $V_{(BR)CEO}$ | 50 | —     | Vdc           |
| Collector–Base Breakdown Voltage<br>( $I_C = 0.1 \text{ mAdc}, I_E = 0$ )    | $V_{(BR)CBO}$ | 60 | —     | Vdc           |
| Collector Cutoff Current<br>( $V_{CE} = 30 \text{ Vdc}$ )                    | $I_{CES}$     | —  | 0.025 | $\mu\text{A}$ |
| Collector Cutoff Current<br>( $V_{CB} = 30 \text{ Vdc}, I_E = 0$ )           | $I_{CBO}$     | —  | 0.01  | $\mu\text{A}$ |
| Emitter Cutoff Current<br>( $V_{EB} = 5.0 \text{ Vdc}, I_C = 0$ )            | $I_{EBO}$     | —  | 0.01  | $\mu\text{A}$ |

**MPS6428****ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted) (Continued)

| Characteristic  | Symbol        | Min                      | Max                | Unit |
|---|---------------|--------------------------|--------------------|------|
| <b>ON CHARACTERISTICS</b>   |               |                          |                    |      |
| DC Current Gain<br>( $V_{CE} = 5.0\text{ Vdc}$ , $I_C = 0.01\text{ mAdc}$ )<br>( $V_{CE} = 5.0\text{ Vdc}$ , $I_C = 0.1\text{ mAdc}$ )<br>( $V_{CE} = 5.0\text{ Vdc}$ , $I_C = 1.0\text{ mAdc}$ )<br>( $V_{CE} = 5.0\text{ Vdc}$ , $I_C = 10\text{ mAdc}$ ) | $h_{FE}$      | 250<br>250<br>250<br>250 | —<br>650<br>—<br>— | —    |
| Collector–Emitter Saturation Voltage<br>( $I_C = 10\text{ mAdc}$ , $I_B = 0.5\text{ mAdc}$ )<br>( $I_C = 100\text{ mAdc}$ , $I_B = 5.0\text{ mAdc}$ )   | $V_{CE(sat)}$ | —<br>—                   | 0.2<br>0.6         | Vdc  |
| Base–Emitter On Voltage<br>( $I_C = 1.0\text{ mAdc}$ , $V_{CE} = 5.0\text{ Vdc}$ )  | $V_{BE(on)}$  | 0.56                     | 0.66               | Vdc  |

**SMALL–SIGNAL CHARACTERISTICS**



|  |           |     |     |                  |
|--|-----------|-----|-----|------------------|
| Current–Gain — Bandwidth Product<br>( $I_C = 1.0\text{ mAdc}$ , $V_{CE} = 5.0\text{ V}$ , $f = 100\text{ MHz}$ ) | $f_T$     | 100 | 700 | MHz              |
| Output Capacitance<br>( $V_{CB} = 10\text{ Vdc}$ , $I_E = 0$ , $f = 1.0\text{ MHz}$ )                            | $C_{obo}$ | —   | 3.0 | pF               |
| Input Capacitance<br>( $V_{EB} = 0.5\text{ Vdc}$ , $I_C = 0$ , $f = 1.0\text{ MHz}$ )                            | $C_{ibo}$ | —   | 8.0 | pF               |
| Input Impedance<br>( $I_C = 1.0\text{ mAdc}$ , $V_{CE} = 5.0\text{ Vdc}$ , $f = 1.0\text{ kHz}$ )                | $h_{ie}$  | 3.0 | 30  | k $\Omega$       |
| Voltage Feedback Ratio<br>( $I_C = 1.0\text{ mAdc}$ , $V_{CE} = 5.0\text{ Vdc}$ , $f = 1.0\text{ kHz}$ )         | $h_{re}$  | 2.0 | 20  | $\times 10^{-4}$ |
| Small–Signal Current Gain<br>( $I_C = 1.0\text{ mAdc}$ , $V_{CE} = 5.0\text{ Vdc}$ , $f = 1.0\text{ kHz}$ )      | $h_{fe}$  | 200 | 800 | —                |
| Output Admittance<br>( $I_C = 1.0\text{ mAdc}$ , $V_{CE} = 5.0\text{ Vdc}$ , $f = 1.0\text{ kHz}$ )              | $h_{oe}$  | 5.0 | 50  | $\mu\text{mhos}$ |

**NOISE FIGURE/TOTAL NOISE VOLTAGE CHARACTERISTICS**

|  | NF VT   |      | NF VT   |      | NF VT   |     | Unit |    |
|--|---------|------|---------|------|---------|-----|------|----|
|  | Max (1) |      | Max (2) |      | Max (3) |     |      |    |
| Noise Figure/Voltage<br>( $V_{CE} = 5.0\text{ V}$ , $I_C = 0.1\text{ mA}$ , $T_A = 25^\circ\text{C}$ ) | 7.0     | 18.1 | 6.0     | 5700 | 3.5     | 4.3 | dB   | nV |

- $R_S = 10\text{ k}\Omega$ , BW = 1.0 Hz,  $f = 100\text{ Hz}$
- $R_S = 50\text{ k}\Omega$ , BW = 15.7 kHz,  $f = 10\text{ Hz}–10\text{ kHz}$
- $R_S = 500\ \Omega$ , BW = 1.0 Hz,  $f = 10\text{ Hz}$

PACKAGE DIMENSIONS

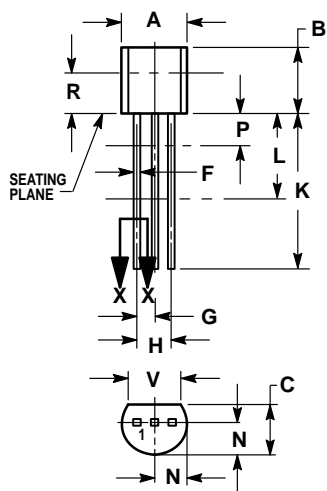

CASE 029-04  
(TO-226AA)  
ISSUE AD

NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
4. DIMENSION F APPLIES BETWEEN P AND L. DIMENSION D AND J APPLY BETWEEN L AND K MINIMUM. LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

| DIM | INCHES |       | MILLIMETERS |      |
|-----|--------|-------|-------------|------|
|     | MIN    | MAX   | MIN         | MAX  |
| A   | 0.175  | 0.205 | 4.45        | 5.20 |
| B   | 0.170  | 0.210 | 4.32        | 5.33 |
| C   | 0.125  | 0.165 | 3.18        | 4.19 |
| D   | 0.016  | 0.022 | 0.41        | 0.55 |
| F   | 0.016  | 0.019 | 0.41        | 0.48 |
| G   | 0.045  | 0.055 | 1.15        | 1.39 |
| H   | 0.095  | 0.105 | 2.42        | 2.66 |
| J   | 0.015  | 0.020 | 0.39        | 0.50 |
| K   | 0.500  | —     | 12.70       | —    |
| L   | 0.250  | —     | 6.35        | —    |
| N   | 0.080  | 0.105 | 2.04        | 2.66 |
| P   | —      | 0.100 | —           | 2.54 |
| R   | 0.115  | —     | 2.93        | —    |
| V   | 0.135  | —     | 3.43        | —    |

STYLE 1:

- PIN 1. EMITTER
2. BASE
3. COLLECTOR

## MPS6428

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

### How to reach us:

**USA/EUROPE:** Motorola Literature Distribution;  
P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447

**JAPAN:** Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, Toshikatsu Otsuki,  
6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-3521-8315

**MFAX:** RMFAX0@email.sps.mot.com – TOUCHTONE (602) 244-6609  
**INTERNET:** <http://Design-NET.com>

**HONG KONG:** Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,  
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

