

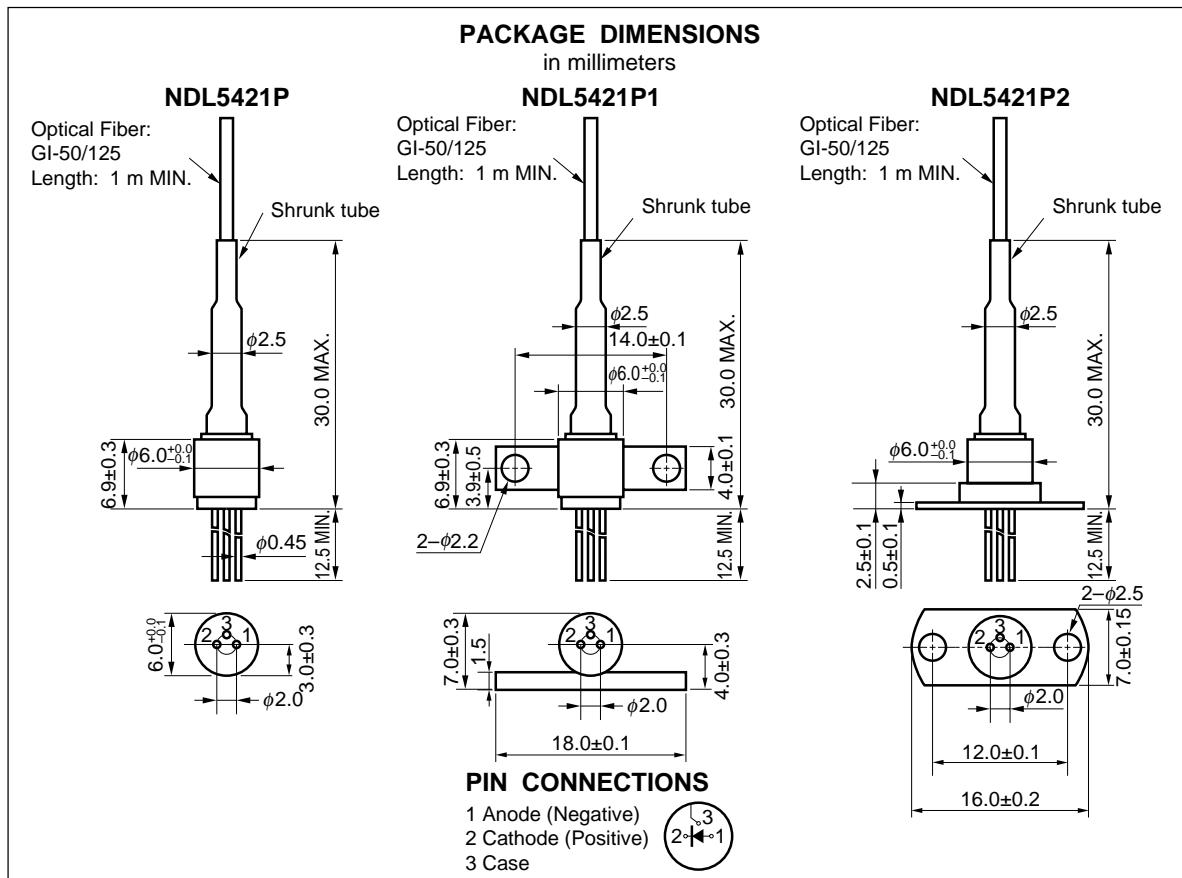
1 000 to 1 600 nm OPTICAL FIBER COMMUNICATIONS φ50 µm InGaAs PIN PHOTO DIODE MODULE

DESCRIPTION

NDL5421P Series is an InGaAs PIN photo diode module with multimode fiber. It is designed for 2.5Gb/s optical fiber communication systems and covers the wavelength range between 1 000 and 1 600 nm with high efficiency.

FEATURES

- Small dark current $I_D = 0.1 \text{ nA}$
- High quantum efficiency $\eta = 86 \% @ \lambda = 1300 \text{ nm}$
 $\eta = 75 \% @ \lambda = 1550 \text{ nm}$
- Detecting area size $\phi 50 \mu\text{m}$
- Low operating voltage $V_R = 5 \text{ V}$
- Low terminal capacitance $C_t = 0.7 \text{ pF} @ f = 1.0 \text{ MHz}, V_R = 5 \text{ V}$
- High speed response $f_c = 2.5 \text{ GHz min.}$
- Coaxial module with multimode fiber (GI-50/125) or optional singlemode fiber (SM-9/125)



The information in this document is subject to change without notice.

★ ORDERING INFORMATION

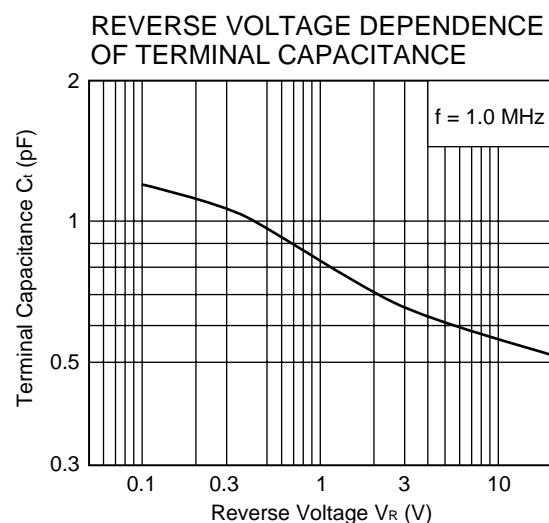
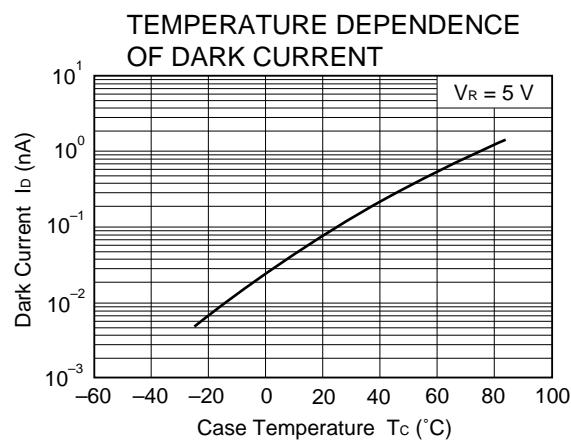
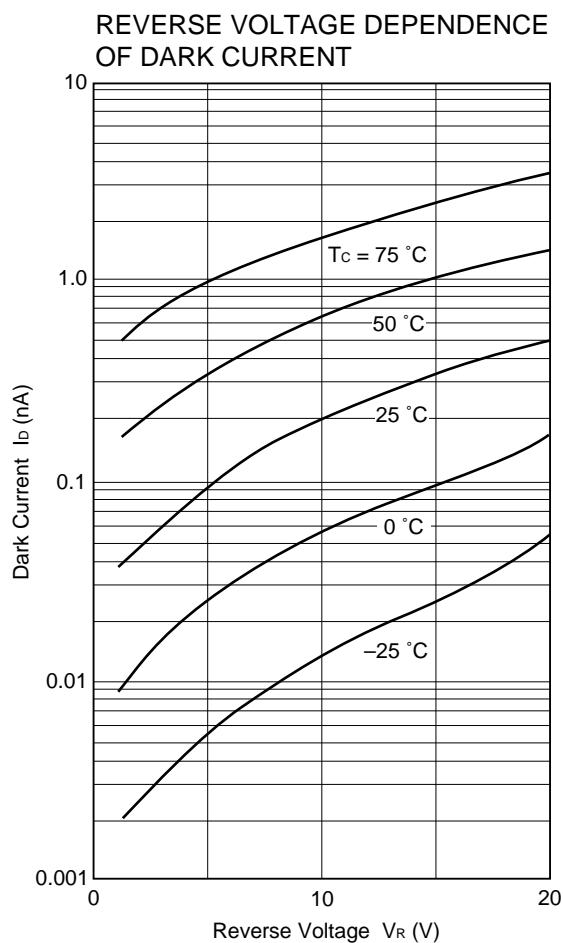
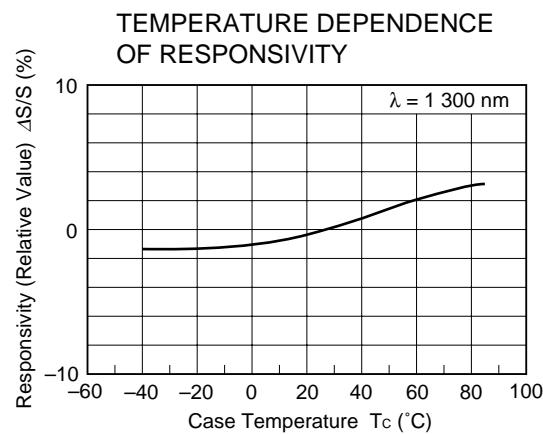
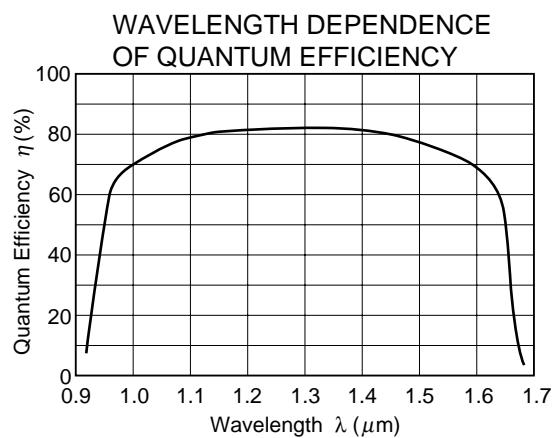
Part Number	Available Connector	Description	
NDL5421P	Without Connector	GI-50/125	No Flange
NDL5421PC	With FC-PC Connector		
NDL5421PD	With SC-PC Connector		
NDL5421PS	Without Connector	SM-9/125	
NDL5421PSC	With FC-PC Connector		
NDL5421PSD	With SC-PC Connector		
NDL5421P1	Without Connector	GI-50/125	Flat Mount Flange
NDL5421P1C	With FC-PC Connector		
NDL5421P1D	With SC-PC Connector		
NDL5421P1S	Without Connector	SM-9/125	
NDL5421P1SC	With FC-PC Connector		
NDL5421P1SD	With SC-PC Connector		
NDL5421P2	Without Connector	GI-50/125	Vertical Flange
NDL5421P2C	With FC-PC Connector		
NDL5421P2D	With SC-PC Connector		
NDL5421P2S	Without Connector	SM-9/125	
NDL5421P2SC	With FC-PC Connector		
NDL5421P2SD	With SC-PC Connector		

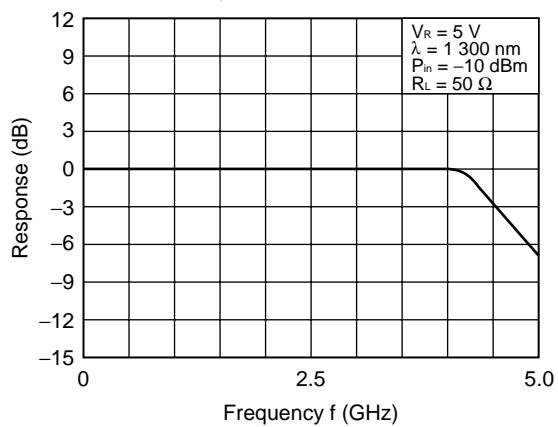
ABSOLUTE MAXIMUM RATINGS (T_c = 25 °C, unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Reverse Voltage	V _R	20	V
Forward Current	I _F	10	mA
Optical Input Power	P _{in}	8	mW
Operating Case Temperature	T _c	-40 to +85	°C
Storage Temperature	T _{stg}	-40 to +85	°C

ELECTRO-OPTICAL CHARACTERISTICS (T_c = 25 °C, unless otherwise specified)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Dark Current	I _D	V _R = 5 V		0.1	1.0	nA
Terminal Capacitance	C _t	V _R = 5 V, f = 1.0 MHz		0.7	0.9	pF
Quantum Efficiency	η	λ = 1 300 nm	75	86		%
		λ = 1 550 nm	64	75		
Responsivity	S	λ = 1 300 nm	0.78	0.89		A/W
		λ = 1 550 nm	0.80	0.94		
Cut-off Frequency	f _c	V _R = 5 V, R _L = 50 Ω, λ = 1 300 nm	2.5			GHz

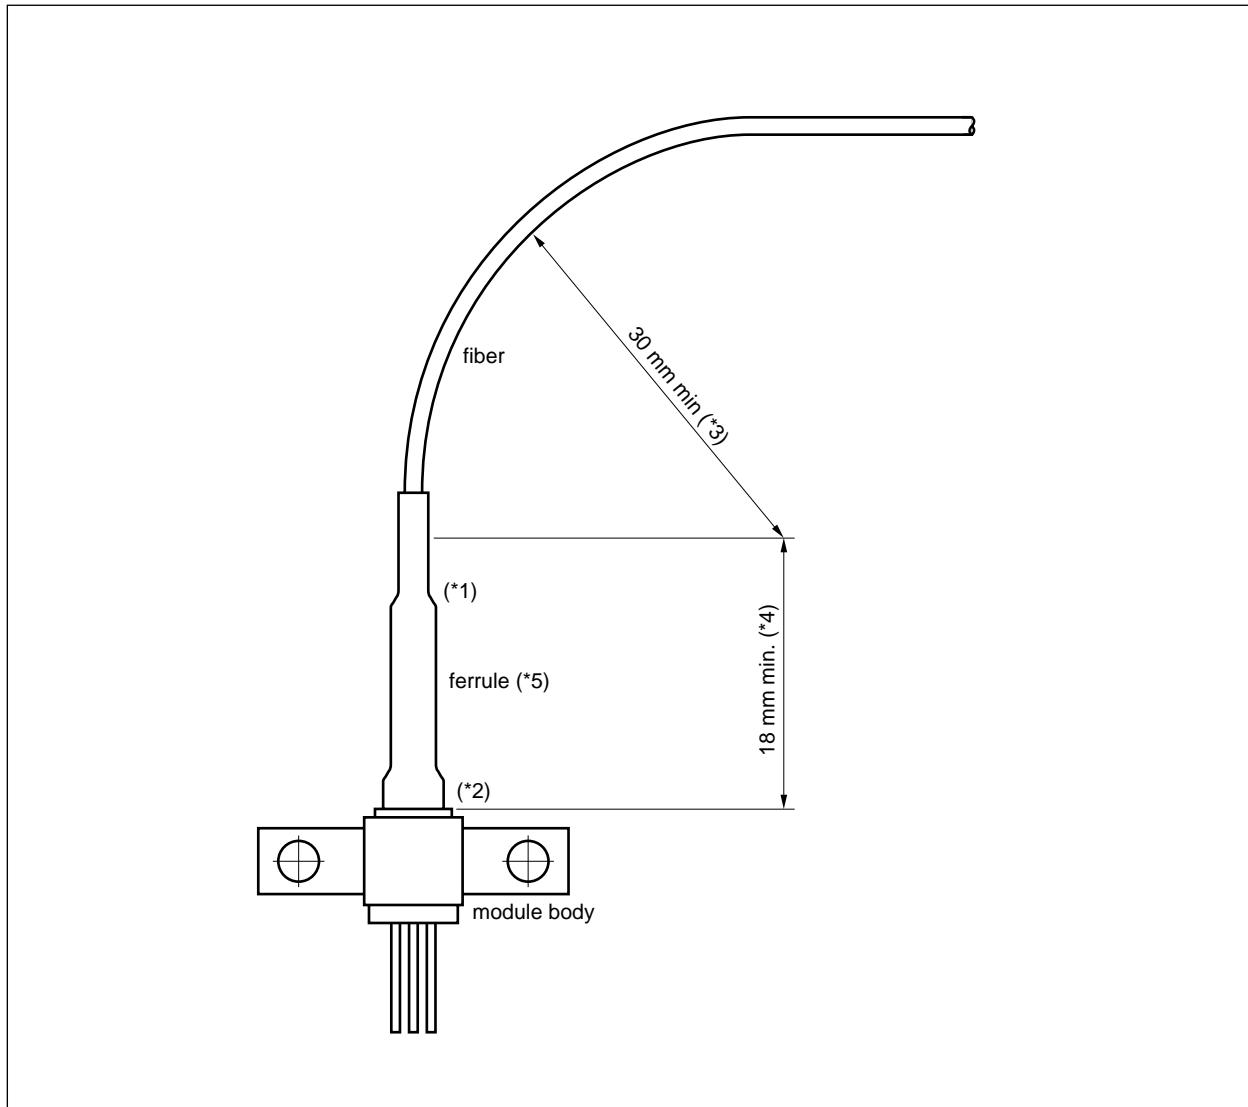
TYPICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$, unless otherwise specified)

FREQUENCY RESPONSE

HANDLING PRECAUTION for PD/APD MODULE

The NEC PD/PAD module has heat shrink tubing to protect the ferrule edge (*1) and the junction between the ferrule and the module body (*2). In order to avoid breaking the fiber and/or optical coupling degradation, NEC recommends the following handling precautions.

1. Do not make the fiber bend radius less than 30 mm (*3).
2. Do not bend the fiber within the 18 mm section from the module body (*4).
3. Do not stress the ferrule with a lateral force exceeding 500 g (*5).



★ InGaAs APD/PD FAMILY

Features Packages	APD				PIN-PD		Remarks
	φ30 μm (for 2.5 Gb/s)	φ50 μm (for 2.5 Gb/s)	φ50 μm	φ80 μm	φ50 μm (for 2.5 Gb/s)	φ80 μm	
TO-18 type Can	NDL5530	—	NDL5500	NDL5510	—	—	3 pins
TO-18 type Can with Micro Lens	—	—	—	—	NDL5490L ^{*3,4}	NDL5405L	3 pins
Small Can φ5.6 μm	NDL5531	—	—	—	NDL5490 ^{*3,4}	—	
Chip on Carrier	NDL5530C	NDL5520C	NDL5500C	NDL5510C	—	—	
Receptacle Module	—	—	—	—	—	NDL5471RC NDL5471RD	3 pins RC: FC receptacle RD: SC receptacle
Coaxial Module with MMF	—	NDL5521P NDL5521P1 NDL5521P2 NDL553P ^{*1} NDL553P1 ^{*1} NDL553P2 ^{*1} NDL5590P NDL5590P1 NDL5590P2	NDL551P NDL551P1 NDL551P2 NDL551P2 ^{*2}	NDL561P ^{*2} NDL561P1 ^{*2} NDL561P2 ^{*2}	NDL5421P NDL5421P1 NDL5421P2	NDL5461P NDL5461P1 NDL5461P2	P1, P2: With flange NDL5590P Series: With Pre-AMP
Coaxial Module with SMF	NDL5531P NDL5531P1 NDL5531P2	—	NDL553PS ^{*1} NDL553P1S ^{*1} NDL553P2S ^{*1}	—	—	NDL5481P ^{*5} NDL5481P1 ^{*5} NDL5481P2 ^{*5}	
14-pin DIP Module with TEC	—	—	NDL5506P NDL5506PS	—	—	—	ΔT = 45 K (@ Ic = 1.1 A) PS: With SMF
6-pin BFY Module with MMF	—	NDL5522P	—	—	NDL5422P	—	With Pre-AMP

*1 For OTDR

*2 With GI-62.5/125

*3 Under development

*4 Internal pre-amplifier for 1Gb/s

*5 For analog application (optical CATV)

Remark Modules are available with FC-PC connector or optional SC-PC connector.

REFERENCE

Document Name	Document No.
NEC semiconductor device reliability/quality control system	LEI-1201
Quality grade on NEC semiconductor devices	IEI-1209
Semiconductor device mounting technology manual	C10535E
Guide to quality assurance for semiconductor devices	MEI-1202
Semiconductor selection guide	X10679E

CAUTION

Within this device there exists GaAs (Gallium Arsenide) material which is a harmful substance if ingested. Please do not under any circumstances break the hermetic seal.

The export of this product from Japan is prohibited without governmental license. To export or re-export this product from a country other than Japan may also be prohibited without a license from that country. Please call an NEC sales representative.

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.

Anti-radioactive design is not implemented in this product.