


### ●Features

1. Current transfer ratio  
CTR: MIN.60 at  $I_F = \pm 1\text{mA}$   $V_{CE} = 5\text{V}$
2. High isolation voltage between input and output (Viso: 5000Vrms).
3. Compact dual-in-line package.
4. AC input.


### ●Applications

1. Programmable Controller Applications for Low Input Photocouplers and High Vceo Photocouplers.
2. Telephone sets, telephone exchangers.
3. System appliances. ●Limit Switches ●Sensors ●Thermostats ●Transducers etc.
4. Signal transmission between circuits of different potentials and impedances.


## 1. OUTSIDE DIMENSION : UNIT (mm)

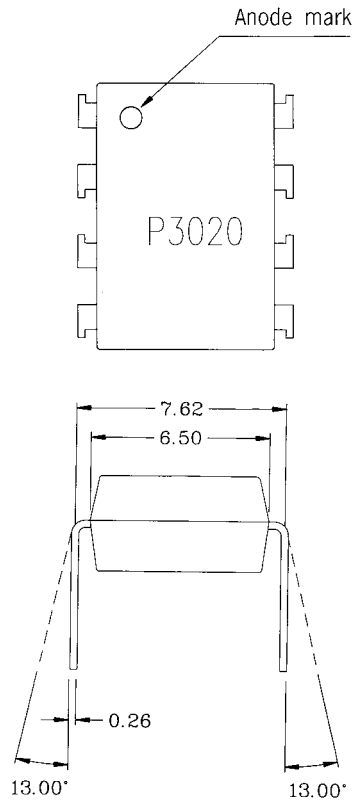

TOLERANCE :  $\pm 0.1\text{mm}$

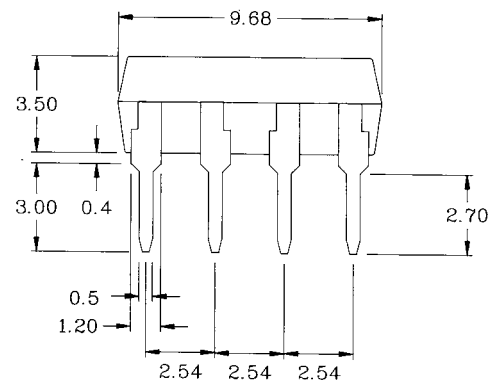

## 2. SCHEMATIC : TOP VIEW

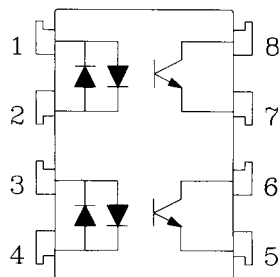

- 1,2. Anode, Cathode
- 3,4. Anode, Cathode
- 5,7. Emitter
- 6,8. Collector

● Absolute Maximum Ratings

(Ta=25°C)


	Parameter	Symbol	Rating	Unit
Input	Forward current	$I_F$	$\pm 50$	mA
	Peak forward current	$I_{FM}$	$\pm 1$	A
	Power dissipation	$P_D$	70	mW
Output	Collector-emitter voltage	$V_{CEO}$	60	V
	Emitter-collector voltage	$V_{ECO}$	6	V
	Collector current	$I_C$	50	mA
	Collector power dissipation	$P_C$	150	mW
	Total power dissipation	$P_{tot}$	200	mW
	Isolation voltage 1 minute	$V_{iso}$	5000	Vrms
	Operating temperature	$T_{opr}$	-30 to +100	°C
	Storage temperature	$T_{stg}$	-55 to +125	°C
	Soldering temperature 10 seconds	$T_{sol}$	260	°C

● Electro-optical Characteristics

(Ta=25°C)

	Parameter	Symbol	Conditions	MIN	TYP	MAX	Unit
Input	Forward voltage	$V_F$	$I_F = \pm 20\text{mA}$	-	1.2	1.4	V
	Peak forward voltage	$V_{FM}$	$I_{FM} = \pm 0.5\text{A}$	-	-	3.5	V
	Terminal capacitance	$C_t$	$V=0, f=1\text{kHz}$	-	30	-	pF
Output	Collector dark current	$I_{CEO}$	$V_{CE}=20\text{V}, I_F=0$	-	-	$10^{-7}$	A
Transfer characteristics	Current transfer ratio	CTR	$I_F = \pm 1\text{mA}, V_{CE}=5\text{V}$	60	-	600	%
	Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_F = \pm 20\text{mA}, I_C=1\text{mA}$	-	0.1	0.3	V
	Isolation resistance	$R_{iso}$	DC500V	$5 \times 10^{10}$	$10^{11}$	-	ohm
	Floating capacitance	$C_f$	$V=0, f=1\text{MHz}$	-	0.6	1.0	pF
	Cut-off frequency	$f_c$	$V_{CE}=5\text{V}, I_C=2\text{mA}, R_L=100\text{ohm}$	-	80	-	kHz
	Response time (Rise)	$t_r$	$V_{CE}=2\text{V}, I_C=2\text{mA}, R_L=100\text{ohm}$	-	5	20	$\mu\text{s}$
	Response time (Fall)	$t_f$		-	4	20	$\mu\text{s}$


Fig 1 Current Transfer Ratio vs. Forward Current

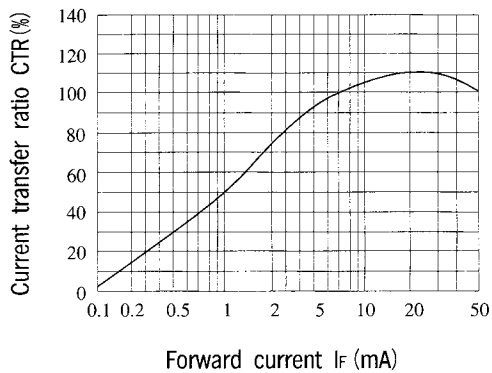


Classification table of current transfer ratio is shown below.

Model NO.	Rank mark	CTR (%)
P3020	A	60 TO 600
P3020	B	60 TO 300


**Fig. 2 Collector Power Dissipation vs. Ambient Temperature**

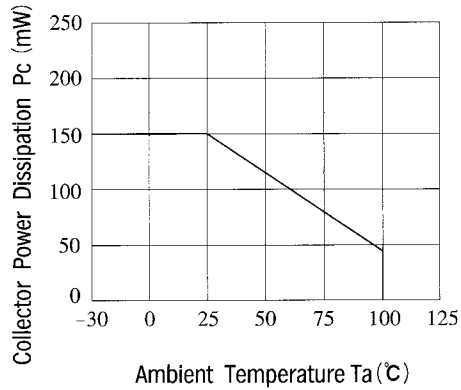


**Fig. 3 Collector Dark Current vs. Ambient Temperature**

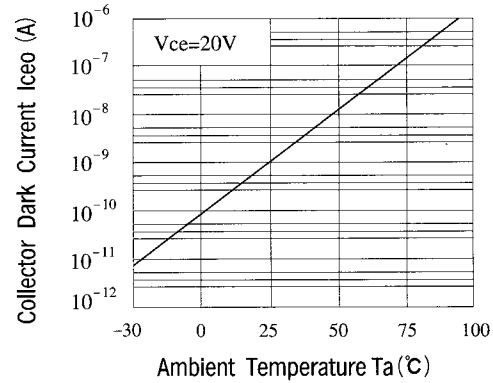


**Fig. 4 Forward Current vs. Ambient Temperature**

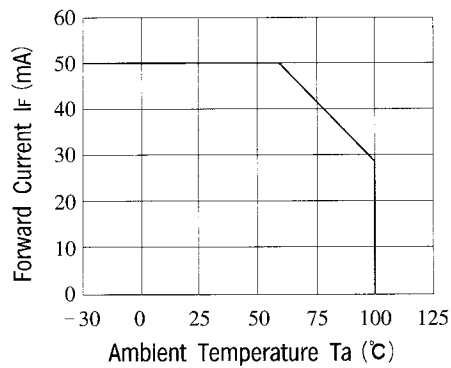


**Fig. 5 Forward Current vs. Forward Voltage**

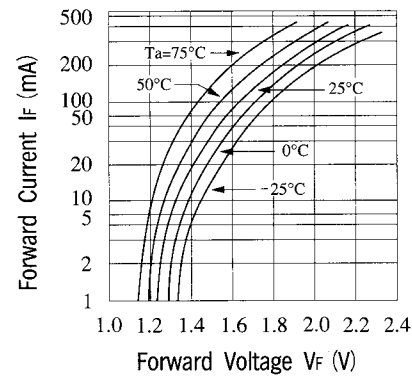


**Fig. 6 Collector Current vs. Collector-emitter Voltage**

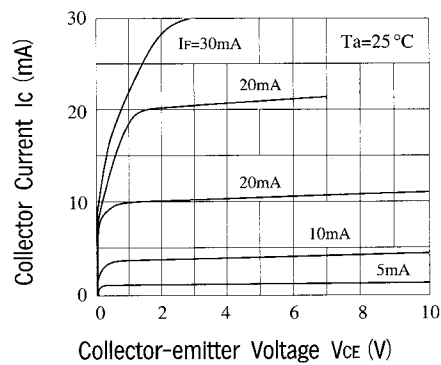


**Fig. 7 Relative Current Transfer Ratio vs. Ambient Temperature**

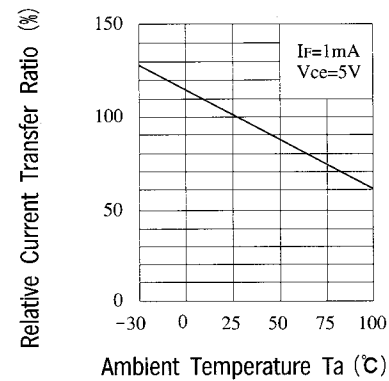


**Fig 8 Collector-emitter Saturation Voltage vs. Ambient Temperature**

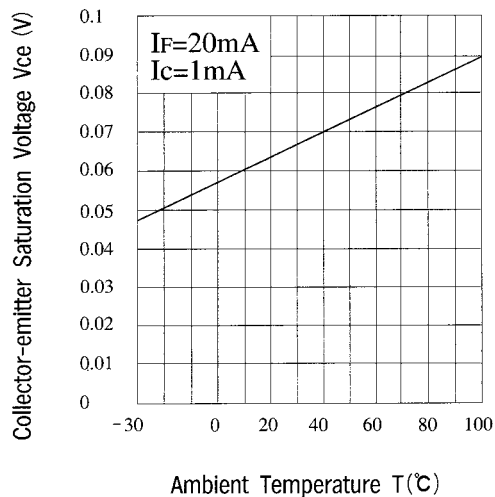

**Fig 9 Collector-emitter Saturation Voltage vs. Forward Current**

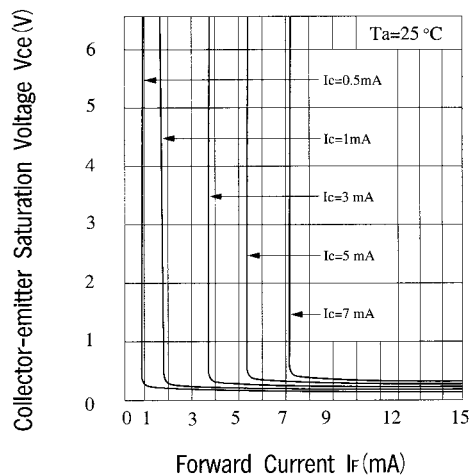

**Fig 10 Response Time vs. Load Resistance**

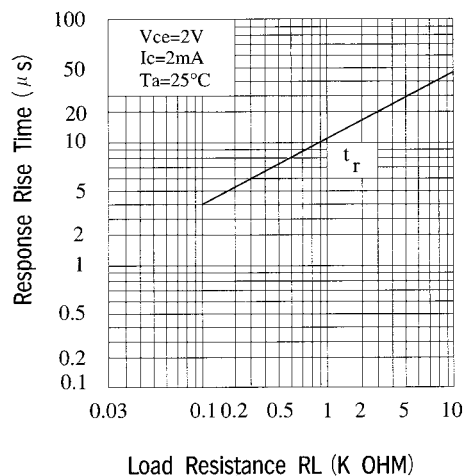

**Fig 11 Response Time vs. Load Resistance**

