

Photocoupler



PC-18T1 • PC-18T2 • PC-18T4

These Photocouplers consist of a Gallium Arsenide Infrared Emitting Diode and a Silicon NPN Photo Darlington transistor per channel.

The PC-18T1 has one channel in a 4-pin package.

The PC-18T2 has two channels in a 8-pin package.

The PC-18T4 has four channels in a 16-pin package.

FEATURES

- Small Package Size
- Collector-Emitter Voltage : Min.30V
- Current Transfer Ratio : Type 1000% (at $I_F=1\text{mA}$, $V_{CE}=2\text{V}$)
- Electrical Isolation Voltage : AC2500Vrms
- UL Recognized File No. E107486


APPLICATIONS

- Interface between two circuits of different potential
- Telephone Line Receiver
- Automatic Vending Machine
- Power Supply Regulators


DIMENSION

(Unit : mm)




PC18T1

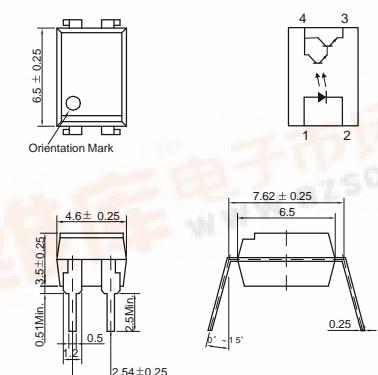

PC18T2

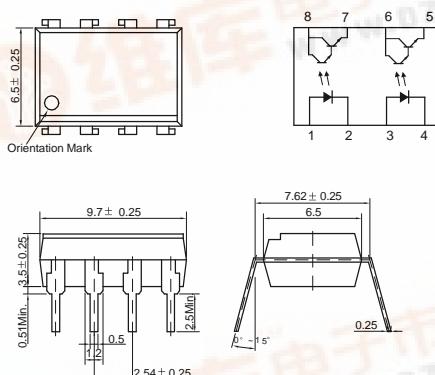

PC18T4

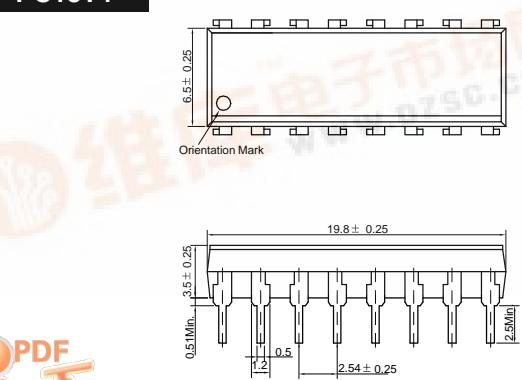

Photocoupler



PC-18T1 • PC-18T2 • PC-18T4

MAXIMUM RATINGS

(Ta=25 °C)

Parameter	Symbol	Rating	Unit
Input	Forward Current	IF	60 mA
	Reverse Voltage	VR	5 V
	Peak Forward Current ^{*1}	IFP	1 A
	Power Dissipation	PD	150 mW
	Junction Temperature	TJ	125
Output	Collector-Emitter Breakdown Voltage	BVCEO	30 V
	Emitter-Collector Breakdown Voltage	BVECO	5 V
	Collector Current	Ic	50 mA
	Collector Power Dissipation	Pc	150 mW
Input to Output Isolation Voltage ^{*2}	Viso	AC2500	Vrms
Storage Temperature	Tstg	-55~+125	
Operating Temperature	Topr	-30~+100	
Lead Soldering Temperature ^{*3}	Tsol	260	
Total Power Dissipation	Ptot	250	mW

*1. Input current with 100µs pulse width, 1% duty cycle

*2. Measured at RH=40~60% for 1min

*3. 1/16 inch form case for 10sec

ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25 °C, unless otherwise noted)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	
Input	Forward Voltage	VF	IF=10mA	-	1.15	1.30	V
	Reverse Current	IR	VR=5V	-	-	10	µA
	Capacitance	C _T	V=0, f=1kHz	-	30	-	pF
Output	Collector-Emitter Breakdown Voltage	BVCEO	Ic=0.5mA	30	-	-	V
	Emitter-Collector Breakdown Voltage	BVECO	Ie=0.1mA	5	-	-	V
	Collector Dark Current	I _{CEO}	IF=0, V _{CE} =10V	-	-	100	nA
	Capacitance	C _{CE}	V _{CE} =0, f=1kHz	-	10	-	pF
Coupled	Current Transfer Ratio ^{*4}	CTR	IF=1mA, V _{CE} =2V	300	-	600	%
	Collector-Emitter Saturation Voltage	V _{CE(SAT)}	IF=1mA, Ic=2mA	-	0.85	1.0	V
	Input-Output Capacitance	C _{IO}	V=0, f=1kHz	-	1	-	pF
	Input-Output Isolation Resistance	R _{IO}	RH=40~60%, V=500V	-	10 ¹¹	-	
	Rise Time	tr	V _{CE} =10V, RL=100	-	100	-	µs
	Fall Time	tf		-	100	-	µs


*4. CTR=(Ic/IF) X 100 (%)

Photocoupler


KODENSHI

PC-18T1 • PC-18T2 • PC-18T4


**Forward Current vs.
Ambient Temperature**

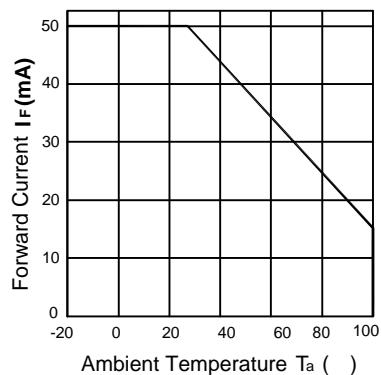


**Collector Power Dissipation vs.
Ambient Temperature**

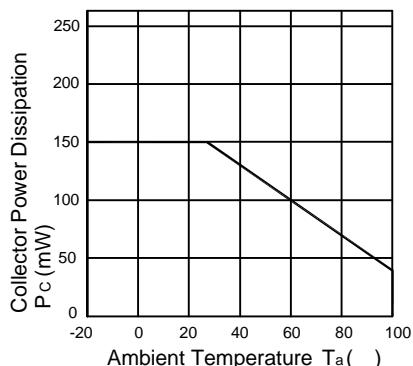


**Forward Current vs.
Forward Voltage**

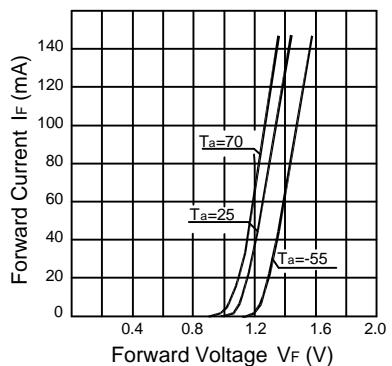


**Collector Current vs.
Collector-Emitter Voltage**

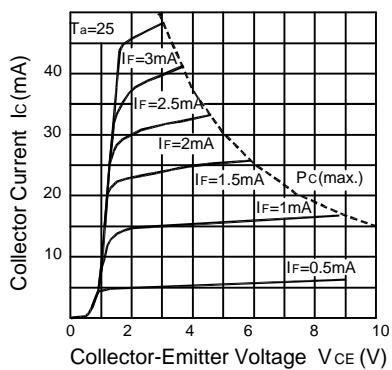


**Dark Current vs.
Ambient Temperature**

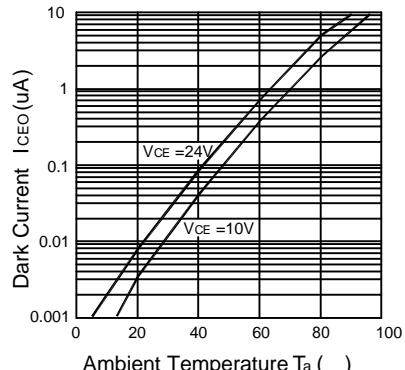

**Collector Current vs.
Forward Current**

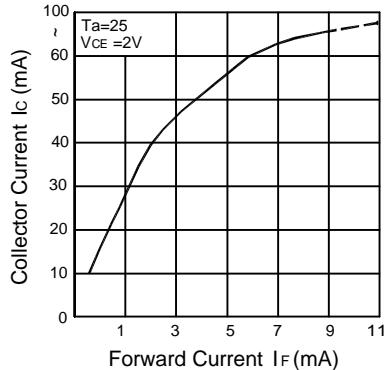

**Response Time vs.
Load Resistance**

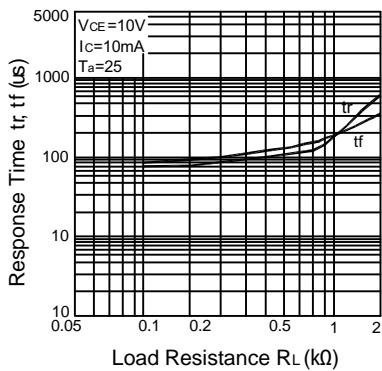

Switching Time Test Circuit

