



M/A-COM



Radar Pulsed Power Transistor - 40 Watts, 1.20-1.40 GHz, 150µs Pulse, 10% Duty

Features

- NPN Silicon Microwave Power Transistor
- Common Base Configuration
- Broadband Class C Operation
- High Efficiency Interdigitated Geometry
- Diffused Emitter Ballasting Resistors
- Gold Metalization System
- Internal Input and Output Impedance Matching
- Hermetic Metal/Ceramic Package

Description

M/A-COM's PH1214-40M is a silicon bipolar NPN power transistor intended for use in L-band, 1.2 - 1.4 GHz pulsed radars such as air traffic control and long-range weather radars. Designed for common-base, class C, broadband pulsed power applications, the PH1214-40M can produce 40 watts of output power with medium pulse-length (150µs) at 10 percent duty cycle. The transistor is housed in a 2-lead, rectangular metal-ceramic flange package, with internal input and output impedance matching networks. Diffused emitter ballast resistors and gold metalization assures ruggedness and long-term reliability.


Absolute Maximum Rating at 25°C

Parameter	Symbol	Rating	Units
Collector-Emitter Voltage	V_{CES}	70	V
Emitter-Base Voltage	V_{EBO}	3.0	V
Collector Current (Peak)	I_C	3.0	A
Total Power Dissipation @ +25°C	P_{TOT}	88	W
Storage Temperature	T_{stg}	-65 to +200	°C
Junction Temperature	T_j	200	°C

Electrical Specifications at 25°C

Symbol	Parameter	Test Conditions	Min	Max	Units
BV_{CES}	Collector-Emitter Breakdown	$I_C = 15 \text{ mA}$	70	-	V
I_{CES}	Collector-Emitter Breakdown	$V_{CE} = 40 \text{ V}$	-	2.0	mA
$R_{TH(JC)}$	Thermal Resistance	$V_{CC} = 40 \text{ V}, P_{in} = 5.0 - 5.6 \text{ W}, f = 1.2, 1.3, 1.4 \text{ GHz}$	-	1.7	°C/W
P_O	Output Power	$V_{CC} = 40 \text{ V}, P_{in} = 5.0 - 5.6 \text{ W}, f = 1.2, 1.3, 1.4 \text{ GHz}$	40	-	W
G_P	Power Gain	$V_{CC} = 40 \text{ V}, P_{in} = 5.0 - 5.6 \text{ W}, f = 1.2, 1.3, 1.4 \text{ GHz}$	8.5	-	dB
η	Collector Efficiency	$V_{CC} = 40 \text{ V}, P_{in} = 5.0 - 5.6 \text{ W}, f = 1.2, 1.3, 1.4 \text{ GHz}$	50	-	%
R_L	Input Return Loss	$V_{CC} = 40 \text{ V}, P_{in} = 5.0 - 5.6 \text{ W}, f = 1.2, 1.3, 1.4 \text{ GHz}$	6	-	dB
VSWR-T	Load Mismatch Tolerance	$V_{CC} = 40 \text{ V}, P_{in} = 5.0 - 5.6 \text{ W}, f = 1.2, 1.3, 1.4 \text{ GHz}$	-	3:1	-
VSWR-S	Load Mismatch Stability	$V_{CC} = 40 \text{ V}, P_{in} = 5.0 - 5.6 \text{ W}, f = 1.2, 1.3, 1.4 \text{ GHz}$	-	1.5:1	-

Outline Drawing¹

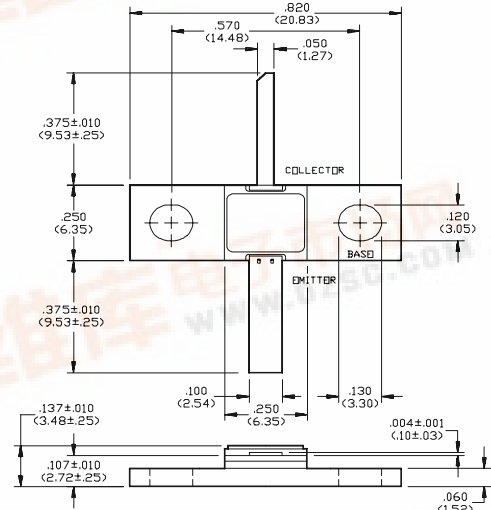


Notes: (unless otherwise specified)

1. Tolerances are: inches $\pm .005''$ (millimeters $\pm 0.13\text{mm}$)


Broadband Test Fixture Impedance

f (GHz)	$Z_{IF} (\Omega)$	$Z_{OF} (\Omega)$
1.20	2.6 - j4.7	2.8 - j0.7
1.30	2.5 - j4.1	3.3 - j0.2
1.40	2.3 - j3.7	3.0 + j0.4

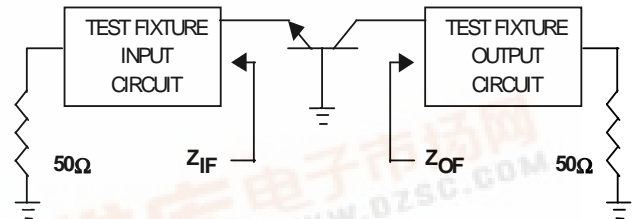

Test Fixture Electrical Schematic¹

Top View

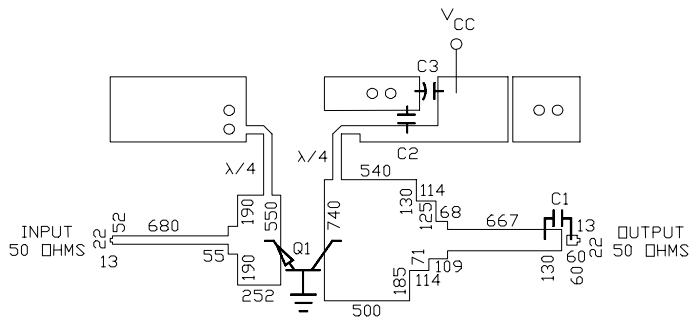

PH1214-40M

Note:

1. Dimensions are in mils.

Electrical Schematic Parts List

C1, C2	100 pF ATC size A
C3	47 uF 63 Volts
Q1	PH1214-40M
Board Type	Rogers 6010.5 .025" Thick, E _R = 10.5