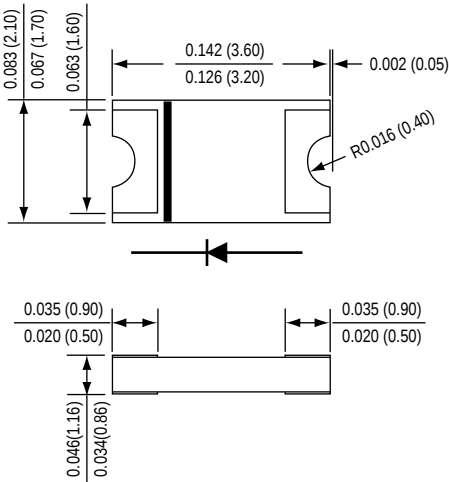


|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |         |             |       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-------------|-------|
| <div><div></div><div><div>BYD127Z</div><div>SURFACE MOUNT GLASS PASSIVATED JUNCTION ULTRAFAST EFFICIENT RECTIFIER</div><div>Reverse Voltage - 200 Volts      Forward Current - 1.0 Ampere</div></div></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |         |             |       |
| <div><div><div>PATENTED</div><div>1206</div><div></div><div>*Dimensions in inches and (millimeters)</div><div><div>SuperChip<sup>TM</sup></div><div>SUPEREX II<sup>TM</sup></div></div></div></div> <div><div></div><div>* Equivalent to SOD87, GL1M , SOD123</div></div> <div><div>FEATURES</div><div><ul style="list-style-type: none"><li>* Lead free product</li><li>* Leadless chip form , no lead damage</li><li>* Lead-free solder Joint , No Wire bond &amp; Lead Frame</li><li>* Low profile package</li><li>* For surface mounted applications</li><li>* Built-in strain relief</li><li>* Low power loss , High efficiency</li><li>* High current capability</li><li>* High surge capacity</li><li>* Plastic package has Underwriters Laboratory Flammability Classification 94V-0</li></ul></div></div> <div><div>MECHANICAL DATA</div><div><div>Case : Packed with FRP substrate and epoxy underfilled</div><div>Terminals : Pure Tin plated (Lead-Free), solderable per MIL-STD-750, Method 2026.</div><div>Polarity : Cathode Band, Laser marking</div><div>Weight : 0.012 gram</div></div></div> |         |             |       |
| MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |         |             |       |
| Ratings at 25 <sup>o</sup> C ambient temperature unless otherwise specified.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | SYMBOLS | BYD127Z     | UNITS |
| Maximum repetitive peak reverse voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | VRRM    | 200         | Volts |
| Maximum RMS voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | VRMS    | 140         | Volts |
| Maximum DC blocking voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | VDC     | 200         | Volts |
| Maximum average forward rectified current TL=110 <sup>o</sup> C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | I (AV)  | 1.0         | Amps  |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | IFSM    | 30          | Amps  |
| Maximum instantaneous forward voltage at 1.0 A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | VF      | 0.96        | Volts |
| Maximum DC reverse current<br>TA=25 <sup>o</sup> C<br>at rated DC blocking voltage<br>TA=125 <sup>o</sup> C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | IR      | 2<br>50     | uA    |
| Maximum reverse recovery time (NOTE 1)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | trr     | 35          | nS    |
| Typical junction capacitance (NOTE 2)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | CJ      | 10          | pF    |
| Operating junction and storage temperature range                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | TJ,TSTG | -65 to +175 | °C    |

NOTES : (1) Reverse recovery test condition : IF 0.5A, IR=1.0A, Irr=0.25A  
(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts  
(3) Preliminary draft.

# RATINGS AND CHARACTERISTIC CURVES OF BYD127Z

FIG.1 - FORWARD CURRENT DERATING CURVE

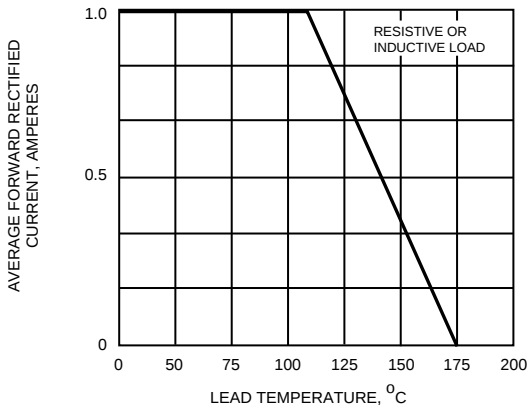


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

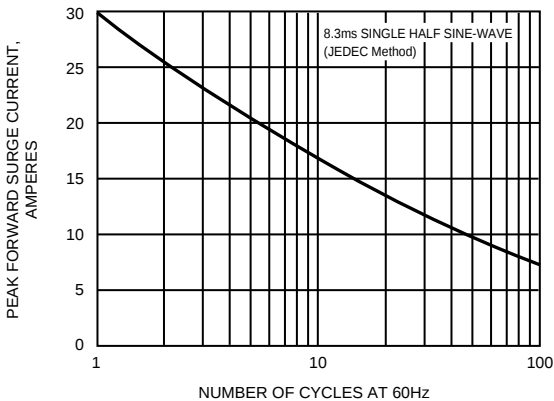


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

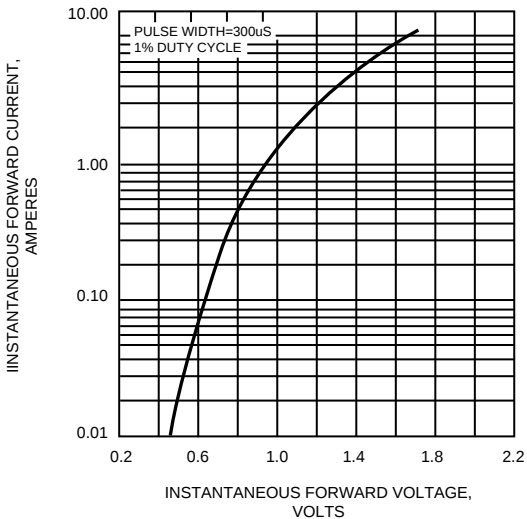


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

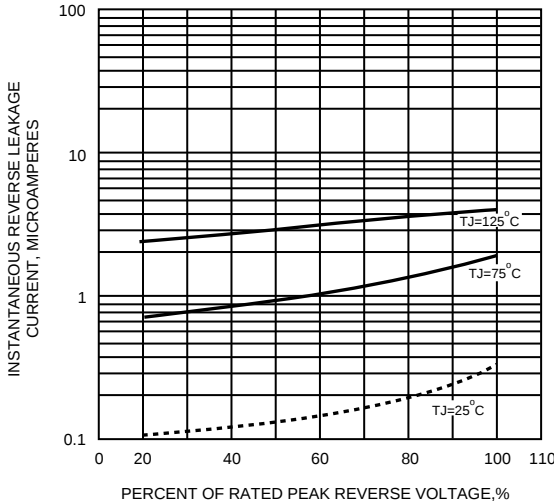


FIG.5 - TYPICAL JUNCTION CAPACITANCE

