


PHASE NOISE (1 Hz BW, typical)

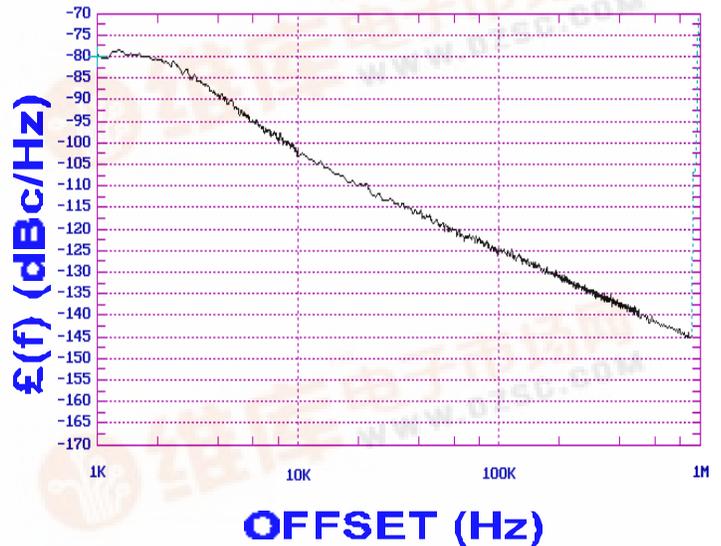

FEATURES	
• Frequency Range:	200 - 230 MHz
• Step Size:	100 KHz
• PLL - Style Package	
APPLICATIONS	
• Telecommunications	
• Satellite	
• Telemetry	

PERFORMANCE SPECIFICATIONS	VALUE	UNITS
Frequency Range	200 - 230	MHz
RMS Phase Error (100 Hz - 100 KHz)	0.5	°
Harmonic Suppression (2nd, typ.)	-10	dBc
Sideband Spurs (typ.)	-65	dBc
Power Output	3.5±2.5	dBm
Load Impedance	50	Ω
Step Size	100	KHz
Charge Pump Output Current	LOW	
Switching Speed (typ., adjacent channel)	1	mSec
Startup Lock Time (typ.)	5	mSec
Operating Temperature Range	-40 to +85	°C
Package Style	PLL	
POWER SUPPLY REQUIREMENTS		
Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	25	mA

All specifications are typical unless otherwise noted and subject to change without notice.


APPLICATION NOTES
<ul style="list-style-type: none"> • AN-107 : How to Solder Z-COMM VCOs / PLLs • AN-200 : Mounting and Grounding of Z-COMM PLLs • AN-201 : PLL Fundamentals AN-202 : PLL Functional Description

NOTES:


Reference Oscillator Signal: 5 MHz f_{osc} <math>< 40</math> MHz



PLL OUTPUT SPECTRUM

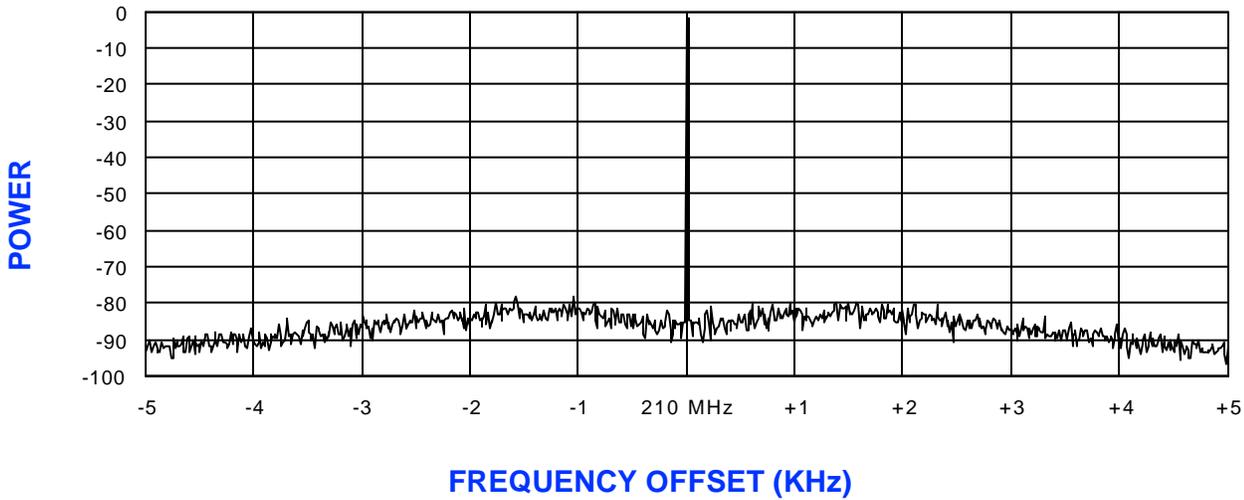

POWER CURVE, typ.

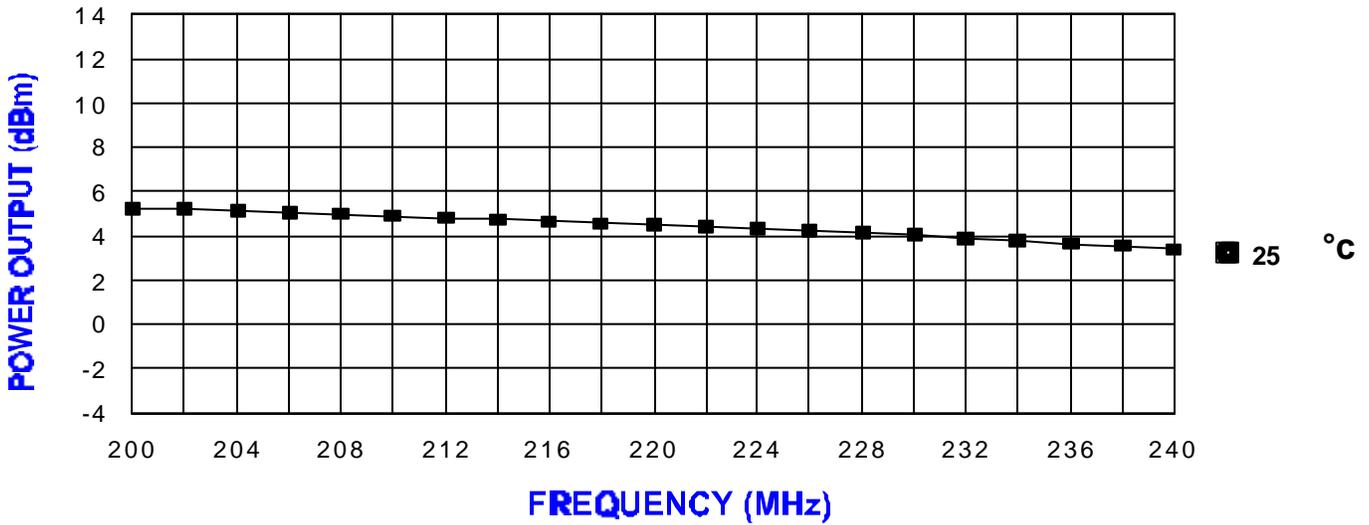

PHYSICAL DIMENSIONS

